



UltraBright™
Accent Series
LED Strip Light

Product Data Sheet

Description

Our UltraBright™ Accent Series is the perfect choice for those wanting to uplift and revitalize any room - small or big. With near-perfect color rendering and longer run lengths, these sophisticated lights are made to satisfy the desire for beauty and functionality. Rediscover your most treasured spaces while saving money at the same time with these sophisticated lights that boast an even, bright line of light using minimal energy. Whether you want to brighten corners, beautify ceilings, or fabricate depth and dimension, the Accent™ Series is made to truly reinvent your space.

15 Year
Warranty



Title 24 is regulated for lamps with color temperatures 4000K and below.

Product Features

CRI	High CRI of up to 97
R9 and R13 Values	High R9 (99) & R13 (98) values
Lumens	Up to 300 lm/ft (985/m)
Efficacy	Up to 80 lm/W
Voltage	12V and 24V DC Input
LEDs/Foot	73 LEDs/ft (240/m)
Beam Angle	120° Beam Angle
Ambient Temp	-4°F to 113°F (-20°C to 45°C)
PCB	4 oz copper
LED Pitch	3/16" (4 mm)
Strip Width	3/8" (10 mm)
Cutting Points	1" (25 mm)
Max Run Length in Series 12V*	32 ft (10 m)
Max Run Length in Series 24V*	49 ft (15 m)
LED Size	2216
Adhesive Type	3M VHB 4930 tape (IP20)
Dimmable	Yes

*To be in compliance with Class 2 and our UL Listing, the maximum run length of this strip may not exceed 26 ft (8 m) in 12V and 36 ft (11 m) in 24V. However, in terms of sheer voltage drop and reduction in brightness, the strip is able to be run 32 ft (10 m) in 12V and 49 ft (15 m) in 24V which would be outside the parameters of our UL certification.



Product Specifications


Product SKU	Color* (CCT)	Watts / Foot (Meter)	Lumen / Foot (Meter)	Luminous Efficacy (Lumens / Watt)	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)	TLCI (Qa)	CQS
UB-AT1-27K97C	2700K	3.5 W/ft (11.5 W/m)	267 lm/ft (877 lm/m)	76	97	105	95	95	96
UB-AT1-30K97C	3000K	3.5 W/ft (11.5 W/m)	275 lm/ft (901 lm/m)	78	97	103	96	98	98
UB-AT1-35K97C	3500K	3.5 W/ft (11.5 W/m)	281 lm/ft (921 lm/m)	80	97	103	96	98	98
UB-AT1-40K95C	4000K	3.5 W/ft (11.5 W/m)	263 lm/ft (864 lm/m)	75	97	102	96	98	98
UB-AT1-50K95C	5000K	3.5 W/ft (11.5 W/m)	300 lm/ft (985 lm/m)	80	97	103	96	99	98

*CCT may be +/-100K but always ordered from same bin and will present no noticeable differences perceived by the human eye.

Ordering Code


Brand	Series	CCT	Voltage	Length
<div style="border: 1px solid black; width: 100px; height: 20px; margin: 0 auto;"></div> <p>UB UltraBright</p>	<div style="border: 1px solid black; width: 100px; height: 20px; margin: 0 auto;"></div> <p>AT1 Accent™ Series</p>	<div style="border: 1px solid black; width: 150px; height: 20px; margin: 0 auto;"></div> <p>27K97C - 2700K/97+ CRI 30K97C - 3000K/97+ CRI 35K97C - 3500K/97+ CRI 40K95C - 4000K/95+ CRI 50K95C - 5000K/95+ CRI</p>	<div style="border: 1px solid black; width: 100px; height: 20px; margin: 0 auto;"></div> <p>12V 24V</p>	<div style="border: 1px solid black; width: 100px; height: 20px; margin: 0 auto;"></div> <p>16FT - 16 ft Reel 32FT - 32 ft Reel 98FT - 98 ft Reel</p>

Dimensions

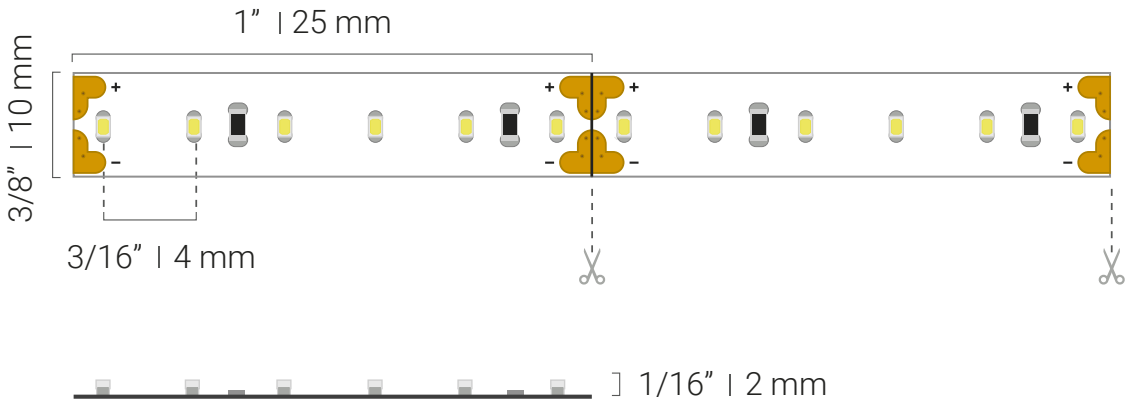


Dimming Options

Lutron Style Wall Dimmer

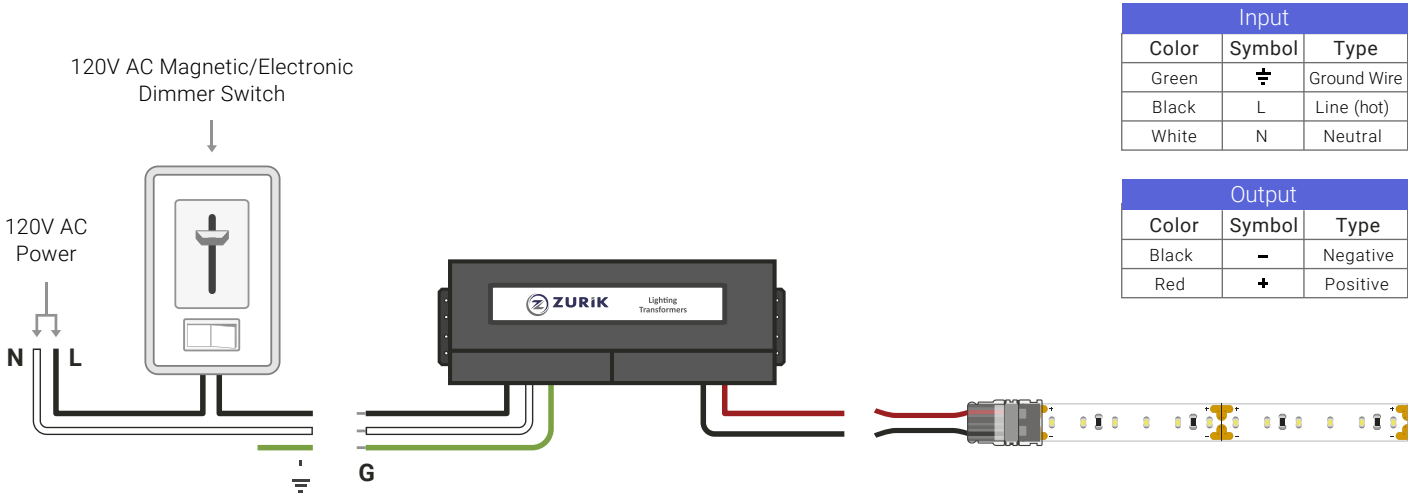


In-Line Dimming

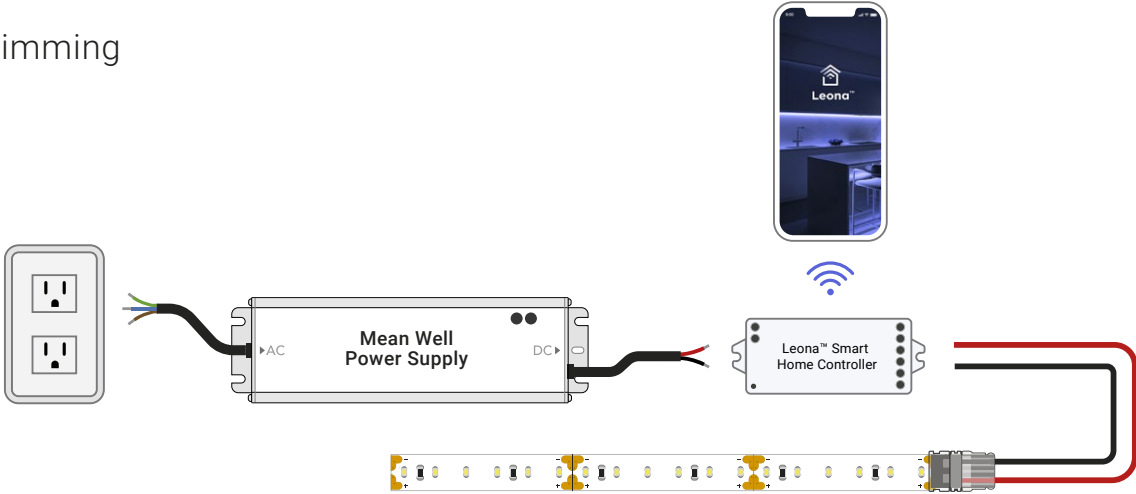

Strip Light Connectors


SKU	Description	Wire Gauge	Amperage** Limit	Diagram
GRIP-SC-C1-10-0*	Attaches LED strip directly to a Power Supply/Driver, low voltage control or DC source.	20 AWG	5 Amps	
GRIP-SC-C1-10-12* GRIP-SC-C1-10-36*	Attaches LED strip directly to a Power Supply/Driver, low voltage control or DC source.	20 AWG		
GRIP-SC-C2-10-06*	Attaches two sections of LED strip together. Wire lead allows for turns around tight corners.	20 AWG		
GRIP-SC-C3-10-0*	Attaches two sections of LED strip together in a continuous run.	-		

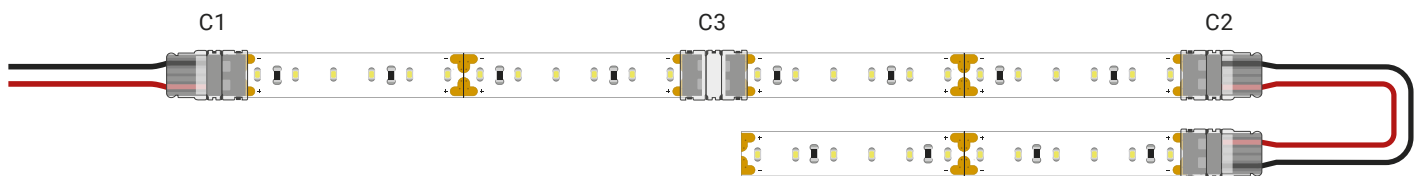

*Calculate max length of LED strip to follow the solderless connector based on an amperage draw of 0.3 A/ft (0.96 A/m) at 12 volts, 0.15 amps per foot (0.48 A/m) at 24 volts.

**Be sure no more than 5 amps is drawn after any solderless connector.

Strip Light Connectors Installation

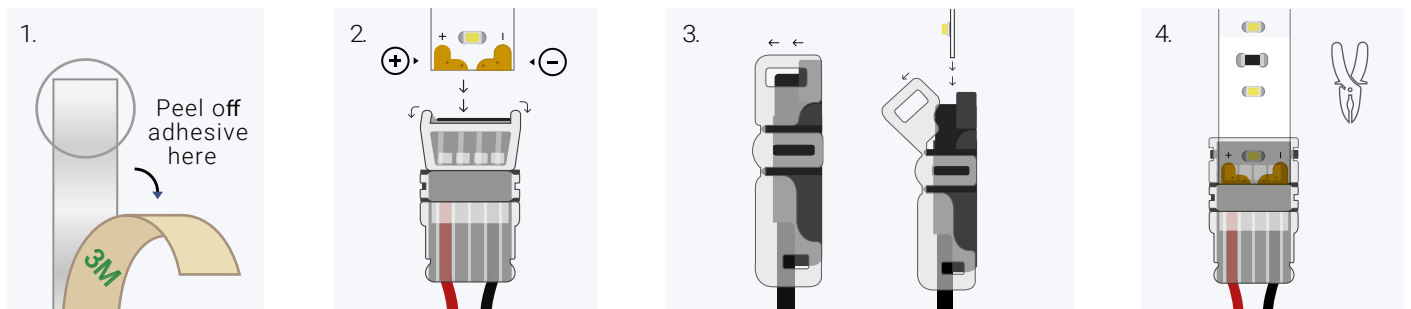

1. Remove 1/4" of 3M adhesive tape on the back from the end of the strip that you want to connect. It must be removed to allow it to fit properly with the solderless connector. (See Diagram 1)

2. Double check the polarity of the strip to match the positive (+) markings together and negative (-) markings together. If you accidentally close the connector before you're ready, you can use a small flathead screwdriver to pry the top back open. (See Diagram 2)

3. Open the top of the grip connector and insert the LED strip inside. Make sure the LED strip is facing up towards the translucent top and the solder pads are directly above the small hooks on the connector. (See Diagram 3)

4. Once everything is in order, use pliers to close and lock the connector. You'll hear a "click" sound when it is properly closed. (See Diagram 4)








Note: Soldering is the preferred method. If you need further assistance, please download our Solderless Connector Installation Guide from our website.

Compatible Drivers (12V)

	Power Supply	Strip Length	Product SKU	Watts	Class 2	Diagram
Non-dimmable	Plug-In Power Supply	1 - 2 ft	12V-WMPS2-1	12W	X	
		3 - 5 ft	12V-DPS2-2	24W	X	
		6 - 10 ft	12V-DPS2-4	48W	X	
		11 - 16 ft	12V-DPS2-6	72W		
		17 - 21 ft	12V-DPS2-8	96W		
Non-dimmable	Mean Well™ HLG	1 - 15 ft	HLG-80H-12A	60W	X	
		16 - 30 ft	HLG-120H-12A	120W		
		31 - 68 ft	HLG-320H-12A	265W		
Dimmable	Zurik® Universal	1 - 7 ft	ZRK-UNV-30W-12VDC	30W	X	
		8 - 15 ft	ZRK-UNV-60W-12VDC	60W	X	
		16 - 30 ft	ZRK-UNV-120W-12VDC	120W		
		31 - 77 ft	ZRK-UNV-300W-12VDC	300W		



Compatible Drivers (24V)

	Power Supply	Strip Length	Product SKU	Watts	Class 2	Diagram	
Non-dimmable	Plug-In Power Supply	1 - 5 ft	24V-WMPS2-1	24W	X		
		6 - 13 ft	24V-DPS2-2.5	60W	X		
		14 - 21 ft	24V-DPS2-4	96W	X		
		22 - 27 ft	24V-DPS2-5	120W			
	Mean Well™ HLG		1 - 15 ft	HLG-60H-24A	60W	X	
			16 - 24 ft	HLG-100H-24A	96W	X	
			25 - 47 ft	HLG-185H-24A	185W		
			48 - 82 ft	HLG-320H-24A	320W		
			83 - 154 ft	HLG-600H-24A	600W		
	Mean Well™ LPV		1 - 14 ft	LPV-60-24	60W	X	
Dimmable	Zurik® EMLV	1 - 7 ft	ZRK-EMLV2-30W-24VDC	30W	X		
		8 - 15 ft	ZRK-EMLV2-60W-24VDC	60W	X		
	Zurik® Universal		1 - 7 ft	ZRK-UNV-30W-24VDC	30W	X	
			8 - 15 ft	ZRK-UNV-60W-24VDC	60W	X	
			16 - 24 ft	ZRK-UNV-96W-24VDC	96W	X	
			25 - 30 ft	ZRK-UNV-120W-24VDC	120W		
			31 - 51 ft	ZRK-UNV-200W-24VDC	200W		
			52 - 77 ft	ZRK-UNV-300W-24VDC	300W		
	Lutron® Hi-Lume™ Premier		1 - 60 ft	L3D0-96W24V-U	96W	X	 
	0.1% Constant Voltage Driver	Dimming Range: 0.1-100%	Description: Hi-Lume Premier 0.1% EcoSystem 24V constant voltage LED driver with Soft-on, Fade-to-Black dimming technology				

Compatible Aluminum Extrusions

Name	Type	Covers	Included Accessories	Kit SKU	Diagram
Ion™	Surface Mount	-	-	ION-CH-A-1M	
Atlas™	Angled Surface Mount	Clear Frosted Matte	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	ATL-CH-A-CVR-C-1M ATL-CH-A-CVR-F-1M ATL-CH-A-CVR-M-1M	
Gemini™	Surface Mount	Clear Frosted Matte	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	GEM-CH-A-CVR-C-1M GEM-CH-A-CVR-F-1M GEM-CH-A-CVR-M-1M	
Kepler™	Surface Mount	Clear Frosted Matte	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	KEP-CH-A-CVR-C-1M KEP-CH-A-CVR-F-1M KEP-CH-A-CVR-M-1M	
			Note: This extrusion only fits the Accent™ Series LED strip without connectors.		
Laika™	Surface Mount	Clear Frosted	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	LAI-CH-A-CVR-C-1M LAI-CH-A-CVR-F-1M	
			Note: This extrusion only fits the Accent™ Series LED strip without connectors.		
Nova™	Surface Mount	Clear Round Clear Square Matte Round Matte Square	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	NOV-CH-A-CVR-C-RD-1M NOV-CH-A-CVR-C-SQ-1M NOV-CH-A-CVR-M-RD-1M NOV-CH-A-CVR-M-SQ-1M	
Titan™	Surface Mount	Clear Frosted Matte	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	TTN-CH-A-CVR-C-1M TTN-CH-A-CVR-F-1M TTN-CH-A-CVR-M-1M	
Calypso™	Recessed Mount	Frosted Matte	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	CAL-CH-A-CVR-F-1M CAL-CH-A-CVR-M-1M	
Cassini™	Recessed Mount	Clear Frosted Matte	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	CAS-CH-A-CVR-C-1M CAS-CH-A-CVR-F-1M CAS-CH-A-CVR-M-1M	
Phoenix™	Recessed Mount	Frosted Matte	2 Open End Caps 2 Closed End Caps 6 Channel Connectors	PHO-CH-A-CVR-F-1M PHO-CH-A-CVR-M-1M	

Safety And Disclosures

1. Installation must be in accordance with local and national electrical code regulations.
2. To ensure safety and correct installation, our strips are intended to be installed by a qualified, licensed electrician.
3. Only install with a Class 2 DC Constant Voltage LED driver to meet UL requirements.
4. Do not install in an environment where excessive heat may exist.
5. LED strip lights must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
6. Do not secure this product with any kind of staples, nails, or materials that could potentially damage the product in any way. Keep these instructions for future reference.
7. Do not cover this product with any kind of combustible material such as paper, fabrics, etc.
8. Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
9. Make sure the appropriate gauge wire is installed between the driver, LEDs, and any dimmers. When choosing wire, calculate voltage drop, maximum amperage rating, and the location ratings on the wire. Improper wire selection and installation could overheat wires, and cause fire.
10. Do not modify the product beyond instructions or warranty will be void.
11. We reserve the right to modify and improve the design of our fixtures without prior notice. Although we try our best to order the same colors every time, due to changes in technology and phosphors over time, we cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.
12. Do not install product with the majority of the product unsupported. Allowing the product to be suspended or dangling while installing may cause damage to the PCB due to the weight of the strip and/or spool.


Warranty Information

Limited Warranty

This product has a 15 year limited warranty from the date of shipment. This warranty only includes the main product outlined in this specification sheet and does not include the additional accessories that are used as a reference. Complete warranty details for fixtures and additional accessories are available at <https://www.flexfireleds.com/warranties/> within the Policies section. For warranty related questions please contact the product support team at (support@flexfireleds.com).

Consumer's Acknowledgment

Flexfire LEDs, Inc. stands behind its products when they are used properly and according to our specifications. When you purchase our products, you are agreeing to the terms and conditions outlined in our warranty section. We try our best to make recommendations, but the burden of proper installation, design, and maintenance relies on the purchaser. This limited warranty does not include product failures that are the result of: Not using a voltage regulated power supply to connect the LED product or controls; Connecting LED products to the wrong output voltage; Improper connection of power supplies, LED products, or controls; Connecting LED products or controls directly to any AC power source if they are stated for DC only input; Connecting power supplies backwards to an AC power source; Products used in an inappropriate location or in environmental conditions (temperature, humidity, moisture, etc.) outside the normal specified range; Water damage to products not specifically sold as waterproof products; Electrical power surges and spikes; Damage from hail, flooding, tornado, fire, wind, earthquake, lightning, electrical storm, or any other natural disasters or "force majeure" incidences; Damage caused by a vehicle or other accident; Damage caused when transporting the item; Damage to any products that were modified by the user, used for purposes other than as intended or directed, or connected to LED systems or components not purchased from Flexfire LEDs; Products that have been subjected to misuse, mishandling, misapplication or accident. Products used in connection with any components, devices or systems other than those explicitly approved as compatible with Company's products and listed on Company's website. Excessive wear and tear and/or physical or accidental abuse, loss, or theft. Improper repairs or warranty services performed by someone other than Flexfire LEDs will void this warranty.

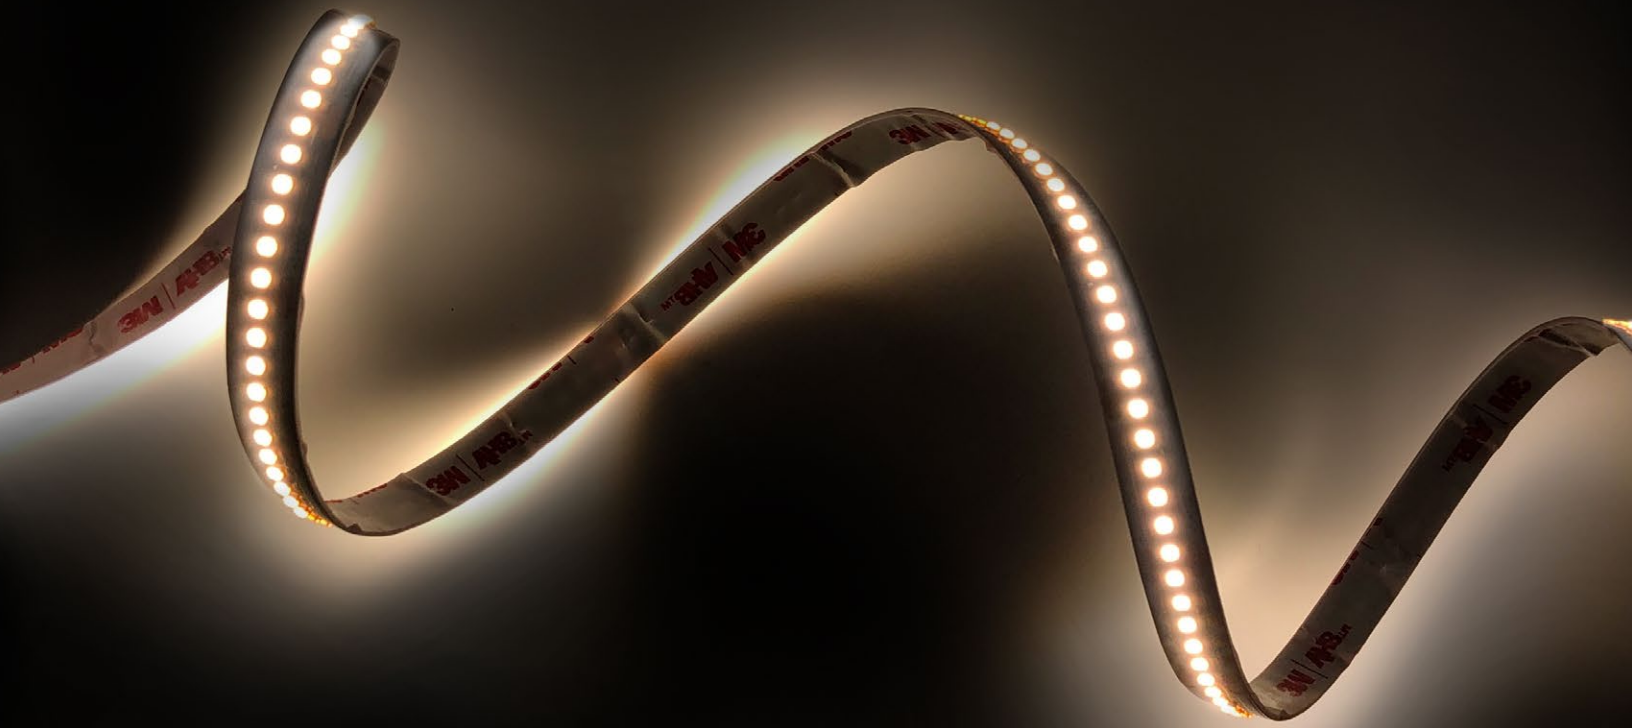

Contact Information



Toll Free Number:
1-844-353-9347



Local Number:
(925) 273-9080



info@flexfireleds.com



FLEXFIRELEDs

www.flexfireleds.com