

Outdoor IP65 UltraBright™  
**Architectural Dynamic Tunable White  
LED Strip Light**

---

Product Data Sheet



 Please read all instructions carefully before installation.

## Description

Our IP65 UltraBright™ Architectural Dynamic Tunable White strip light can be adjusted to produce very special shades of white (color temperatures) and various brightness levels. We manufactured this strip with LEDs of alternating color on the circuit board so that half of the LEDs are a lower temperature (2700K) and half are a higher color temperature (6200K). This means you can select the perfect light while maintaining a high brightness output with excellent color rendering. This strip is compatible with multiple tunable white controllers such as remote controls, DMX or 0-10V systems for effortless personalized control. The IP65 silicone cover protection not only protects the strip light from dust, dirt, and powerful jets of water, but the cover also makes the strip easy to clean.

15-Year  
Warranty



## Product Features

CCT	2700K-6200K
CRI	96
Voltage	24V DC Input
Brightness	Up to 517 lm/ft (1699 lm/m)
Efficacy	Up to 106 lm/W
LEDs/ft	48 LEDs/ft (160 LEDs/m)
Beam Angle	120° Beam Angle
Ambient Temperature	-4°F to 104°F (-20°C to 40°C)
LED Pitch	3/16" (5.5 mm)
Strip Width	3/8" (10 mm)
Cutting Points	4" (101 mm)
PCB	4 oz copper
Max Run Length in Series	32 ft (10 m)
LED Size	3014
Adhesive Type	3M 9495
Dimmable	Yes

## Product Specifications


Product SKU	Color CCT*	Watts / Foot (Meter)	Lumens / Foot (Meter)	Luminous Efficacy (Lumens/Watt)	CRI	Gamut Score (Rg)	Relative Fidelity Score (Rf)	TLCI
IP65-UB-AS-DYN276290C	All channels on	4.6 W/ft (15 W/m)	517 lm/ft (1699 lm/m)	106 lm/W	96	100	90	96
	2700K	2.3 W/ft (7.5 W/m)	233 lm/ft (765 lm/m)	101 lm/W	94	100	91	93
	6200K	2.3W/ft (7.5 W/m)	268 lm/ft (882 lm/m)	117 lm/W	94	98	88	94

\*CCT may be +/-100K but always ordered from same bin and will present no noticeable differences perceived by the human eye.

## Ordering Code

IP Protection	Brand	Series	CCT	Voltage	Length
<b>IP65</b>	<b>UB</b>	<b>AS</b>	<b>DYN276295C</b>	<b>24V</b>	<b>16FT</b>
Weatherproof	UltraBright	Architectural™ Series	2700K-6200K/95+CRI		16ft Reel

## Dimensions

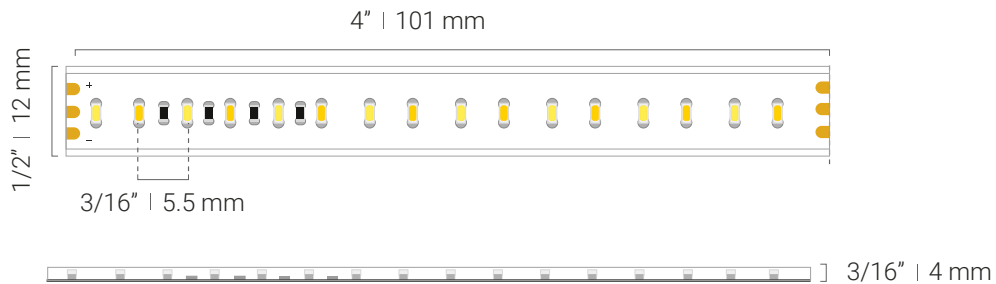


## Included Accessories


<p><b>x1</b></p> <p>Weatherproof C1 Connector (Female)</p>	<p><b>x1</b></p> <p>Weatherproof C1 Connector (Male)</p>	<p><b>x10</b></p> <p>Mounting Bracket</p> <p>W: 6 mm L: 30 mm</p>	<p><b>x2</b></p> <p>End Cap</p> <p>W: 14 mm L: 6 mm</p>	<p><b>x2</b></p> <p>End Cap with holes</p> <p>W: 14 mm L: 6 mm</p>
--	--	---	---	--

## Dimming Options

### PWM Dimming

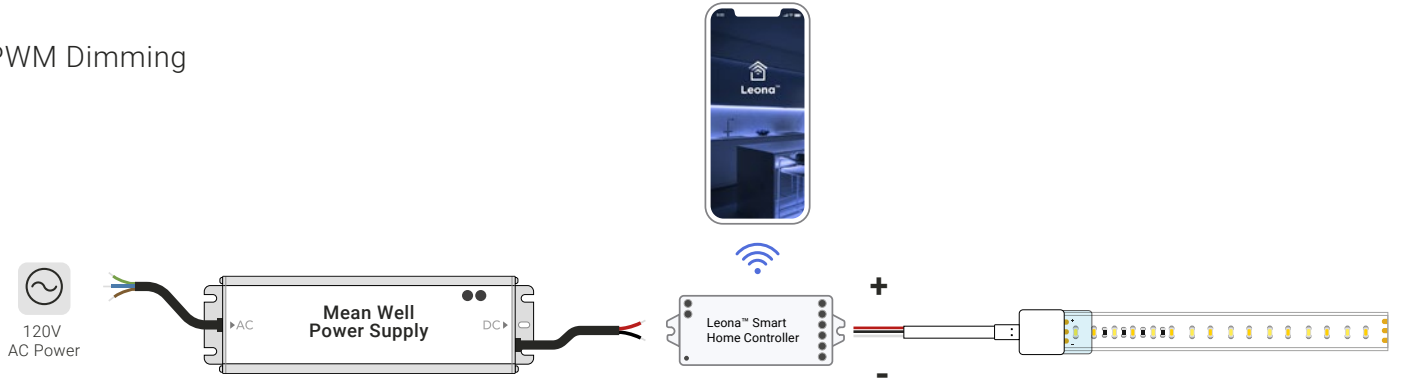

### DMX

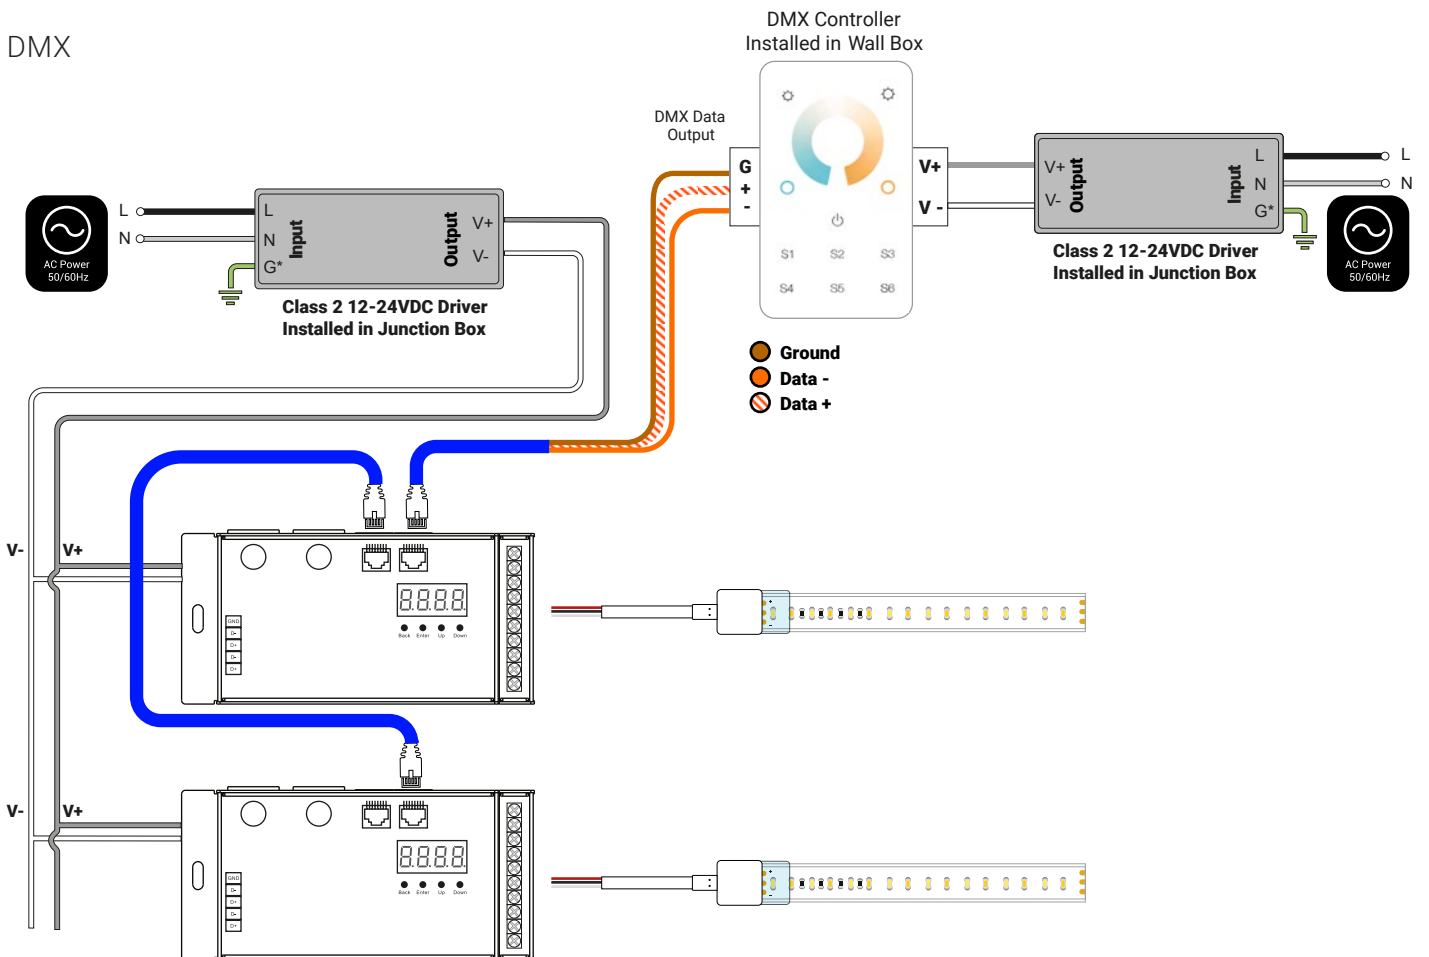

## Compatible Drivers (24V)

	Power Supply	LED Strip Length	Product SKU	Watts	Class 2	Diagram	
<b>Non-dimmable</b>	<b>Plug-In Power Supply</b>	1 - 4 ft	24V-WMPS2-1	24 W	X		
		5 - 10 ft	24V-DPS2-2.5	60 W	X		
		11 - 17 ft	24V-DPS2-4	96 W	X		
		18 - 21 ft	24V-DPS2-5	120 W			
	<b>Mean Well™ HLG</b>		4 - 12 ft	HLG-60H-24A	60 W	X	
			13 - 19 ft	HLG-100H-24A	96 W	X	
			20 - 37 ft	HLG-185H-24A	185 W		
			38 - 65 ft	HLG-320H-24A	320 W		
			66 - 122 ft	HLG-600H-24A	600 W		
		<b>Mean Well™ LPV</b>	1 - 11 ft	LPV-60-24	60 W	X	






## Strip Light Connectors


SKU	Description	Wire Gauge	Amperage** Limit	Diagram
IP65-GRIP-DYN-C1-10-40	Attaches LED strip directly to a Power Supply/Driver, low voltage control or DC source.	22 AWG	5 Amps	
IP65-GRIP-DYN-C2-10-06	Attaches two sections of LED strip together. Wire lead allows for turns around tight corners.	22 AWG		
IP65-GRIP-DYN-C3-10-0	Attaches two sections of LED strip together in a continuous run.	-		

\*Calculate max length of LED strip to follow the solderless connector based on an amperage draw of 0.19 A/ft (0.63 A/m) at 24 volts.


\*\*Be sure no more than 5 amps is drawn after any solderless connector.

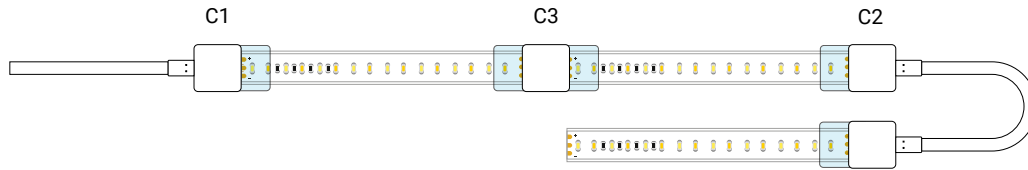


## Strip Light Connectors Installation




When installing connectors with certain LED Tape Lights such as our Dynamic Tunable White, you will need additional copper pad to work with. You need to cut both solder pads so that the piece to be attached to the connector has more surface area to insert into the connector head.




01. Cut the LED strip light and the silicone sleeve on the cutting point you want to install the connector.




02. Check the polarity and remove 2" of the adhesive tape and its backer from the back of the LED Strip light.



03. Apply Silicone sealant liberally inside of the silicone sleeve until ensuring it is completely sealed.













04. Slide the transparent case of your Outdoor IP65 Grip connector into the sleeve, until making sure that the strip is making proper contact.



05. Grab the white plastic part of your connector and push the metal contacts through the window of the transparent case. Adjust it with pliers until you hear a click, and then let the sealant cure according to its own instructions.

## Compatible Aluminum Extrusions

### Flexfire LEDs Mounting Channel Kits

Name	Type	Included Accessories	Covers	Kit SKU	Mockup
<b>Ion™</b>	Surface Mount	-	-	ION-CH-A-1M	
<b>Atlas™</b>	Angled Mount	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	Clear Cover Frosted Cover Matte Cover	ATL-CH-A-CVR-C-1M ATL-CH-A-CVR-F-1M ATL-CH-A-CVR-M-1M	
Note: This extrusion only fits the IP65 UltraBright™ Accent Dynamic White LED strip without connectors.					
<b>Gemini™</b>	Surface Mount	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	Clear Cover Frosted Cover Matte Cover	GEM-CH-A-CVR-C-1M GEM-CH-A-CVR-F-1M GEM-CH-A-CVR-M-1M	
Note: This extrusion only fits the IP65 UltraBright™ Accent Dynamic White LED strip without connectors.					
<b>Kepler™</b>	Surface Mount	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	Clear Cover Frosted Cover Matte Cover	KEP-CH-A-CVR-C-1M KEP-CH-A-CVR-F-1M KEP-CH-A-CVR-M-1M	
Note: This extrusion only fits the IP65 UltraBright™ Accent Dynamic White LED strip without connectors.					
<b>Laika™</b>	Surface Mount	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	Clear Cover Frosted Cover Matte Cover	LAI-CH-A-CVR-C-1M LAI-CH-A-CVR-F-1M	
Note: This extrusion only fits the IP65 UltraBright™ Architectural Dynamic White LED strip without connectors.					
<b>Nova™</b>	Surface Mount	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	Clear Round Cover Clear Square Matte Round Cover Matte Square Cover	NOV-CH-A-CVR-C-RD-1M NOV-CH-A-CVR-C-SQ-1M NOV-CH-A-CVR-M-RD-1M NOV-CH-A-CVR-M-SQ-1M	
Note: This extrusion only fits the IP65 UltraBright™ Architectural Dynamic White LED strip without connectors.					
<b>Titan™</b>	Surface Mount	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	Clear Cover Frosted Cover Matte Cover	TTN-CH-A-CVR-C-1M TTN-CH-A-CVR-F-1M TTN-CH-A-CVR-M-1M	
<b>Calypso™</b>	Recessed Mount	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	Clear Cover Frosted Cover Matte Cover	CAL-CH-A-CVR-F-1M CAL-CH-A-CVR-M-1M	
<b>Cassini™</b>	Recessed Mount	2 Open End Caps 2 Closed End Caps 4 Metal Mounting Clips	Clear Cover Frosted Cover Matte Cover	CAS-CH-A-CVR-C-1M CAS-CH-A-CVR-F-1M CAS-CH-A-CVR-M-1M	
<b>Phoenix™</b>	Recessed Mount	2 Open End Caps 2 Closed End Caps 6 Channel Connectors	Frosted Cover Matte Cover	PHO-CH-A-CVR-F-1M PHO-CH-A-CVR-M-1M	

## Safety And Disclosures

---

1. Installation must be in accordance with local and national electrical code regulations.
2. To ensure safety and correct installation, our strips are intended to be installed by a qualified, licensed electrician.
3. Only install with a Class 2 DC Constant Voltage LED driver to meet UL requirements.
4. Do not install in environment where excessive heat may exist. We encourage the use of a heat sink for heat dissipation purposes when using the UltraBright™ Slim Series LED Strip Light.
5. LED strip lights must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
6. Do not install indoor LED tape light products in outdoor / wet location environments. Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
7. Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
8. Make sure the appropriate gauge wire is installed between LED driver, LEDs, and any dimmers. When choosing wire, calculate voltage drop, maximum amperage rating, and the location ratings on the wire. Improper wire selection and installation could overheat wires, and cause fire.
9. Do not modify product beyond instructions or warranty will be void.
10. We reserve the right to modify and improve the design of our fixtures without prior notice. Although we try our best to order the same colors every time, due to changes in technology and phosphors over time, we cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

## Warranty Information

### Limited Warranty

This product has a 15 year limited warranty from the date of shipment. This warranty only includes the main product outlined in this specification sheet and does not include the additional accessories that are used as a reference. Complete warranty details for fixtures and additional accessories are available at <https://www.flexfireleds.com/warranties/> within the Policies section. For warranty related questions please contact the product support team at ([support@flexfireleds.com](mailto:support@flexfireleds.com)).

### Consumer's Acknowledgment

Flexfire LEDs, Inc. stands behind its products when they are used properly and according to our specifications. When you purchase our products, you are agreeing to the terms and conditions outlined in our warranty section. We try our best to make recommendations, but the burden of proper installation, design, and maintenance relies on the purchaser. This limited warranty does not include product failures that are the result of: Not using a voltage regulated power supply to connect the LED product or controls; Connecting LED products to the wrong output voltage; Improper connection of power supplies, LED products, or controls; Connecting LED products or controls directly to any AC power source if they are stated for DC only input; Connecting power supplies backwards to an AC power source; Products used in an inappropriate location or in environmental conditions (temperature, humidity, moisture, etc.) outside the normal specified range; Water damage to products not specifically sold as waterproof products; Electrical power surges and spikes; Damage from hail, flooding, tornado, fire, wind, earthquake, lightning, electrical storm, or any other natural disasters or "force majeure" incidences; Damage caused by a vehicle or other accident; Damage caused when transporting the item; Damage to any products that were modified by the user, used for purposes other than as intended or directed, or connected to LED systems or components not purchased from Flexfire LEDs; Products that have been subjected to misuse, mishandling, misapplication or accident. Products used in connection with any components, devices or systems other than those explicitly approved as compatible with Company's products and listed on Company's website. Excessive wear and tear and/or physical or accidental abuse, loss, or theft. Improper repairs or warranty services performed by someone other than Flexfire LEDs will void this warranty.





## Contact Information



**Toll Free Number:**  
1-844-353-9347



**Local Number:**  
(925) 273-9080



[info@flexfireleds.com](mailto:info@flexfireleds.com)



**FLEXFIRELEDs**

[www.flexfireleds.com](http://www.flexfireleds.com)