
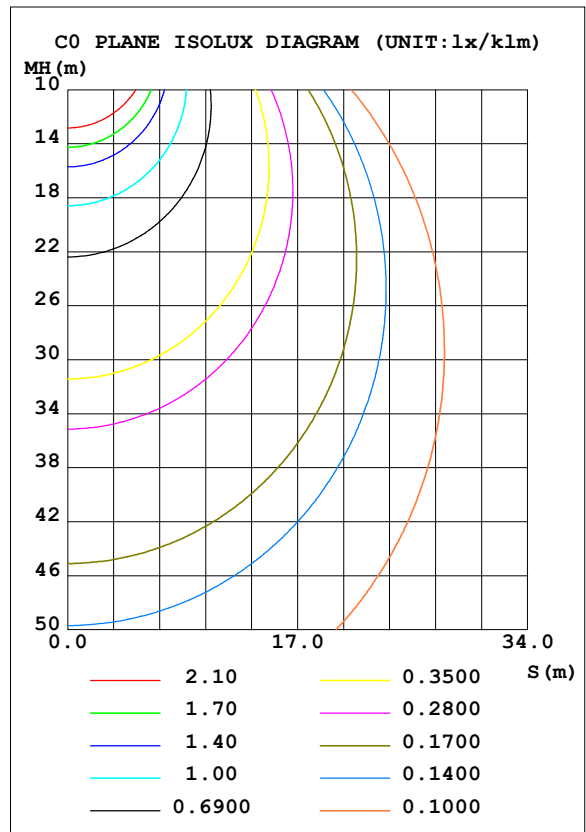


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:23.999V I:0.1904A P:4.5694W PF:1.0000 Freq:0Hz Lamp Flux:477.845x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

DATA OF LAMP		PHOTOMETRIC DATA Eff: 104.57 lm/W			
MODEL	SMD /LED	I _{max} (cd/klm)	346.6	S/MH (C0/180)	1.22
NOMINAL POWER (W)	4.569	LOR (%)	100.0	S/MH (C90/270)	1.22
RATED VOLTAGE (V)	24	TOTAL FLUX (lm/klm)	1000.00	η UP, DN (C0-180)	1.8, 48.0
NOMINAL FLUX (lm)	477.845	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.9, 48.3
LAMPS INSIDE	1	η up (%)	3.7	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	η down (%)	96.3	CIBSE SHR MAX	1.35

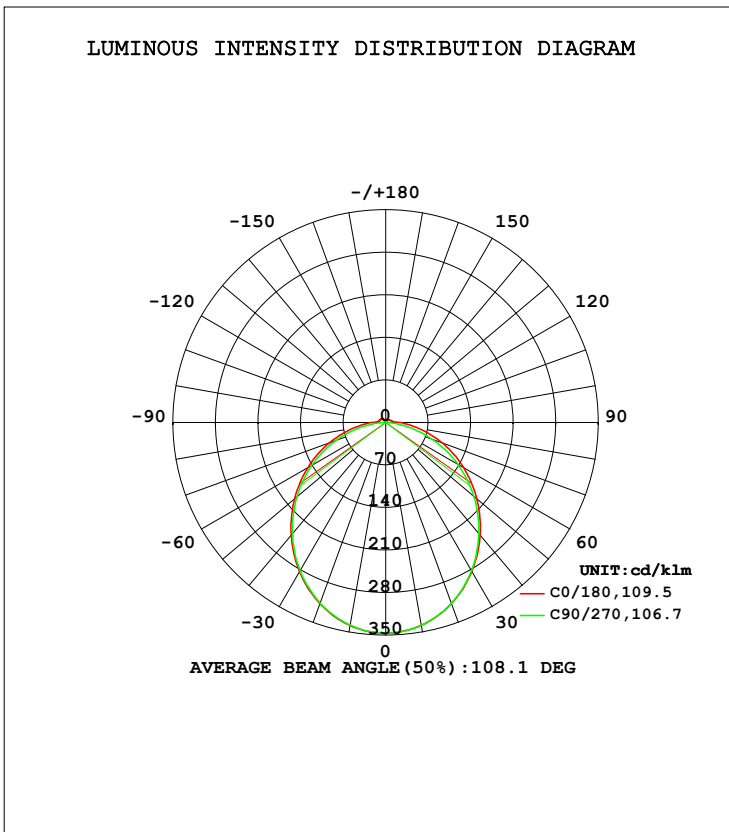

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	338.8	338.7	338.9	339.0	339.2	338.8	338.5	338.5	0- 10	32.71	32.71	3.27,3.27
20	316.8	317.0	316.8	316.7	317.1	316.5	316.1	316.4	10- 20	92.88	125.6	12.6,12.6
30	283.5	283.1	282.3	282.7	283.6	282.6	281.8	282.9	20- 30	138.6	264.2	26.4,26.4
40	242.1	240.7	238.8	239.9	242.1	240.3	239.0	241.0	30- 40	164.1	428.4	42.8,42.8
50	196.0	193.3	189.6	192.4	195.9	193.5	191.0	194.3	40- 50	167.7	596.0	59.6,59.6
60	147.8	143.0	136.8	142.0	147.6	144.2	139.9	145.1	50- 60	150.7	746.8	74.7,74.7
70	99.30	91.75	82.09	90.80	99.03	93.87	87.32	94.92	60- 70	116.7	863.4	86.3,86.3
80	53.77	43.33	29.49	42.61	53.61	46.09	35.53	47.02	70- 80	71.35	934.8	93.5,93.5
90	21.97	12.76	0.4789	12.71	22.03	14.05	1.609	14.48	80- 90	28.19	963.0	96.3,96.3
100	11.08	7.032	0.7524	7.898	12.34	7.923	0.6876	7.530	90-100	9.566	972.5	97.3,97.3
110	9.793	6.285	1.147	7.663	10.94	7.609	1.060	6.384	100-110	7.084	979.6	98,98
120	7.576	5.349	1.535	7.634	10.25	7.514	1.477	5.566	110-120	6.128	985.7	98.6,98.6
130	7.013	4.523	1.980	7.415	9.614	7.235	1.901	4.433	120-130	5.075	990.8	99.1,99.1
140	5.568	3.015	2.375	6.013	8.734	5.588	2.318	3.294	130-140	3.868	994.7	99.5,99.5
150	3.638	2.772	2.770	4.734	5.951	4.770	2.713	2.944	140-150	2.518	997.2	99.7,99.7
160	3.029	3.058	3.034	3.024	3.974	2.942	2.997	2.944	150-160	1.604	998.8	99.9,99.9
170	3.205	3.204	3.216	3.185	3.176	3.190	3.210	3.178	160-170	0.8844	999.7	100,100
180	3.227	3.256	3.253	3.243	3.220	3.241	3.246	3.222	170-180	0.3086	1000.0	100,100
DEG	LUMINOUS INTENSITY:cd/klm									UNIT:lm/klm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:23.999V I:0.1904A P:4.5694W PF:1.0000 Freq:0Hz Lamp Flux:477.845x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

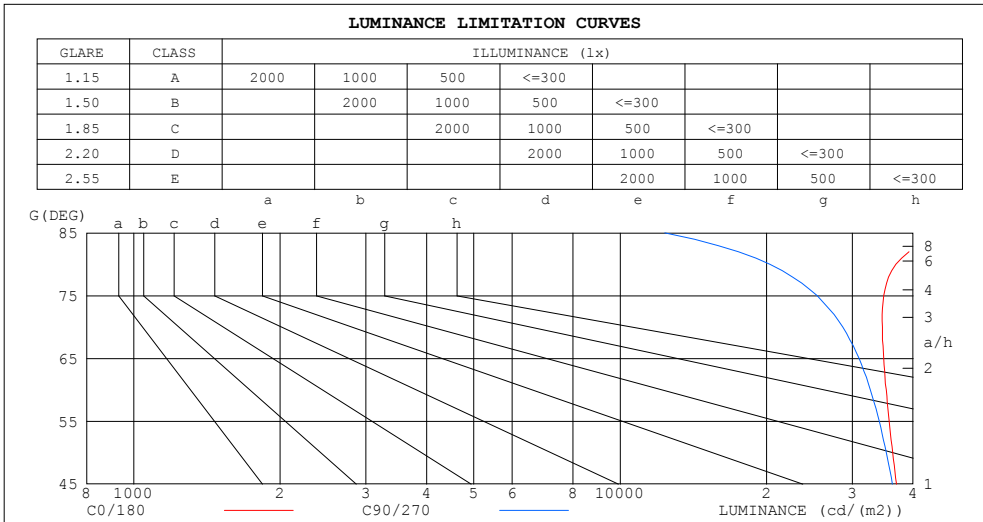

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	48281	12359
80	36896	20301
75	34834	25394
70	34593	28691
65	34817	30971
60	35229	32696
55	35734	34080
50	36321	35259
45	36974	36300


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:23.999V I:0.1904A P:4.5694W PF:1.0000 Freq:0Hz Lamp Flux:477.845x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.96
1.0	1.03	.98	.94	.90	.96	.92	.95	.92	.89	.90	.88	.85	.86	.84	.82	.80
2.0	.89	.82	.76	.87	.81	.75	.83	.77	.73	.79	.75	.71	.75	.72	.69	.66
3.0	.78	.70	.63	.76	.69	.63	.73	.66	.61	.70	.64	.59	.67	.62	.58	.56
4.0	.69	.60	.54	.68	.60	.53	.65	.58	.52	.62	.56	.51	.59	.54	.50	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.49	.44	.53	.48	.43	.41
6.0	.56	.47	.40	.55	.46	.40	.52	.45	.39	.50	.44	.39	.48	.43	.38	.36
7.0	.51	.42	.36	.50	.41	.35	.48	.40	.35	.46	.39	.34	.44	.38	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.36	.31	.42	.36	.31	.41	.35	.30	.28
9.0	.42	.34	.29	.42	.34	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.35	.29	.25	.23

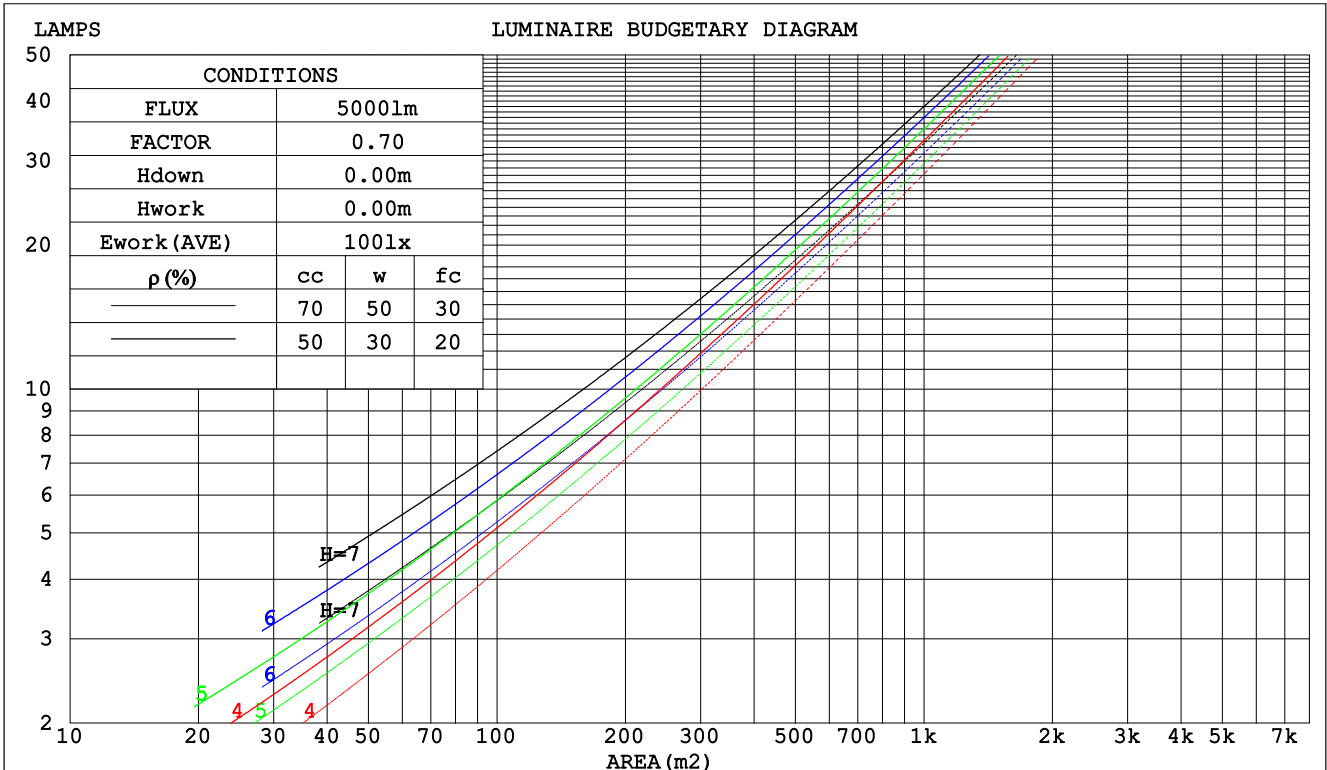

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:23.999V I:0.1904A P:4.5694W PF:1.0000 Freq:0Hz Lamp Flux:477.845x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.319	.181	.057	.311	.177	.056	.295	.169	.054	.281	.162	.052	.268	.155	.050	
2.0	.295	.162	.050	.288	.159	.049	.274	.152	.047	.262	.147	.046	.250	.141	.045	
3.0	.271	.144	.043	.265	.142	.043	.253	.137	.042	.241	.132	.041	.231	.128	.040	
4.0	.249	.130	.038	.244	.127	.038	.233	.123	.037	.223	.120	.036	.213	.116	.035	
5.0	.230	.117	.034	.225	.115	.034	.215	.112	.033	.206	.109	.032	.198	.106	.032	
6.0	.213	.107	.031	.208	.105	.030	.200	.102	.030	.191	.099	.029	.184	.097	.029	
7.0	.198	.098	.028	.194	.097	.028	.186	.094	.027	.179	.092	.027	.172	.089	.026	
8.0	.185	.090	.025	.181	.089	.025	.174	.087	.025	.167	.085	.024	.161	.083	.024	
9.0	.173	.084	.023	.170	.083	.023	.163	.081	.023	.157	.079	.023	.152	.077	.022	
10.0	.163	.078	.022	.160	.077	.022	.154	.075	.021	.148	.074	.021	.143	.072	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.219	.219	.219	.187	.187	.187	.128	.128	.128	.073	.073	.073	.023	.023	.023	
1.0	.209	.185	.162	.179	.158	.140	.123	.109	.096	.071	.063	.056	.023	.020	.018	
2.0	.201	.161	.126	.172	.138	.109	.118	.096	.076	.068	.056	.045	.022	.018	.015	
3.0	.194	.143	.103	.166	.123	.089	.114	.086	.063	.066	.050	.037	.021	.016	.012	
4.0	.186	.130	.087	.159	.112	.076	.110	.078	.053	.063	.046	.032	.020	.015	.010	
5.0	.178	.120	.076	.153	.103	.066	.105	.072	.047	.061	.042	.028	.020	.014	.009	
6.0	.171	.111	.068	.147	.096	.060	.101	.067	.042	.059	.040	.025	.019	.013	.008	
7.0	.164	.104	.062	.141	.091	.054	.098	.063	.039	.057	.037	.023	.018	.012	.008	
8.0	.158	.099	.058	.136	.086	.051	.094	.060	.036	.055	.035	.021	.018	.012	.007	
9.0	.152	.094	.055	.131	.081	.048	.091	.057	.034	.053	.034	.020	.017	.011	.007	
10.0	.146	.089	.052	.126	.078	.045	.087	.055	.032	.051	.032	.019	.017	.011	.006	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:23.999V I:0.1904A P:4.5694W PF:1.0000 Freq:0Hz Lamp Flux:477.845x1 lm										
NAME: CLK-01-35K					TYPE: LED Strip			WEIGHT: Kg		
SPEC.: 4.3W					DIM.: 350*10*10(MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.					SUR.: 340*10(MM)			Shielding Angle: 120		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.9	28.4	27.3	28.8	29.2	26.5	28.1	26.9	28.5	28.9
3H	28.9	30.3	29.3	30.7	31.1	28.2	29.6	28.7	30.0	30.5
4H	29.7	31.1	30.2	31.5	31.9	28.8	30.2	29.3	30.6	31.0
6H	30.5	31.7	31.0	32.2	32.6	29.2	30.4	29.7	30.9	31.4
8H	30.8	32.0	31.3	32.5	32.9	29.3	30.5	29.8	30.9	31.4
12H	31.2	32.3	31.6	32.7	33.3	29.3	30.5	29.8	30.9	31.4
4H 2H	27.5	28.8	27.9	29.2	29.7	27.2	28.5	27.7	29.0	29.4
3H	29.7	30.8	30.2	31.3	31.8	29.1	30.3	29.6	30.7	31.2
4H	30.7	31.7	31.2	32.2	32.7	29.9	30.9	30.4	31.4	31.9
6H	31.6	32.5	32.2	33.0	33.6	30.4	31.3	30.9	31.8	32.3
8H	32.1	32.9	32.6	33.4	34.0	30.5	31.3	31.0	31.8	32.4
12H	32.5	33.2	33.0	33.8	34.3	30.5	31.3	31.1	31.8	32.4
8H 4H	31.0	31.9	31.5	32.4	32.9	30.3	31.1	30.8	31.6	32.2
6H	32.1	32.8	32.7	33.4	33.9	30.9	31.6	31.4	32.1	32.7
8H	32.7	33.3	33.2	33.8	34.4	31.1	31.7	31.7	32.3	32.9
12H	33.2	33.8	33.8	34.4	35.0	31.2	31.8	31.8	32.3	33.0
12H 4H	31.0	31.8	31.6	32.3	32.9	30.3	31.1	30.9	31.6	32.2
6H	32.2	32.8	32.8	33.3	34.0	31.0	31.7	31.6	32.2	32.8
8H	32.8	33.3	33.3	33.9	34.5	31.3	31.8	31.8	32.4	33.0
CIE190: 2010										

CIE190: 2010
Area: 0.004 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.0DEG
Test Date:2020-8-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
Humidity:65.0%
Test Distance:7.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:23.999V I:0.1904A P:4.5694W PF:1.0000 Freq:0Hz Lamp Flux:477.845x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	45	38	56	45	38	54	44	37	31
0.80	66	55	47	65	54	47	63	53	46	39
1.00	74	63	56	73	62	55	71	64	55	47
1.25	81	71	63	80	70	63	77	68	62	54
1.50	86	76	69	85	75	68	81	73	67	59
2.00	93	84	78	91	83	77	87	80	75	66
2.50	97	89	83	95	88	82	91	84	80	70
3.00	101	93	88	98	92	86	94	88	84	74
4.00	105	99	94	102	97	92	97	93	89	79
5.00	107	102	98	104	100	96	99	96	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:23.999V I:0.1904A P:4.5694W PF:1.0000 Freq:0Hz Lamp Flux:477.845x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

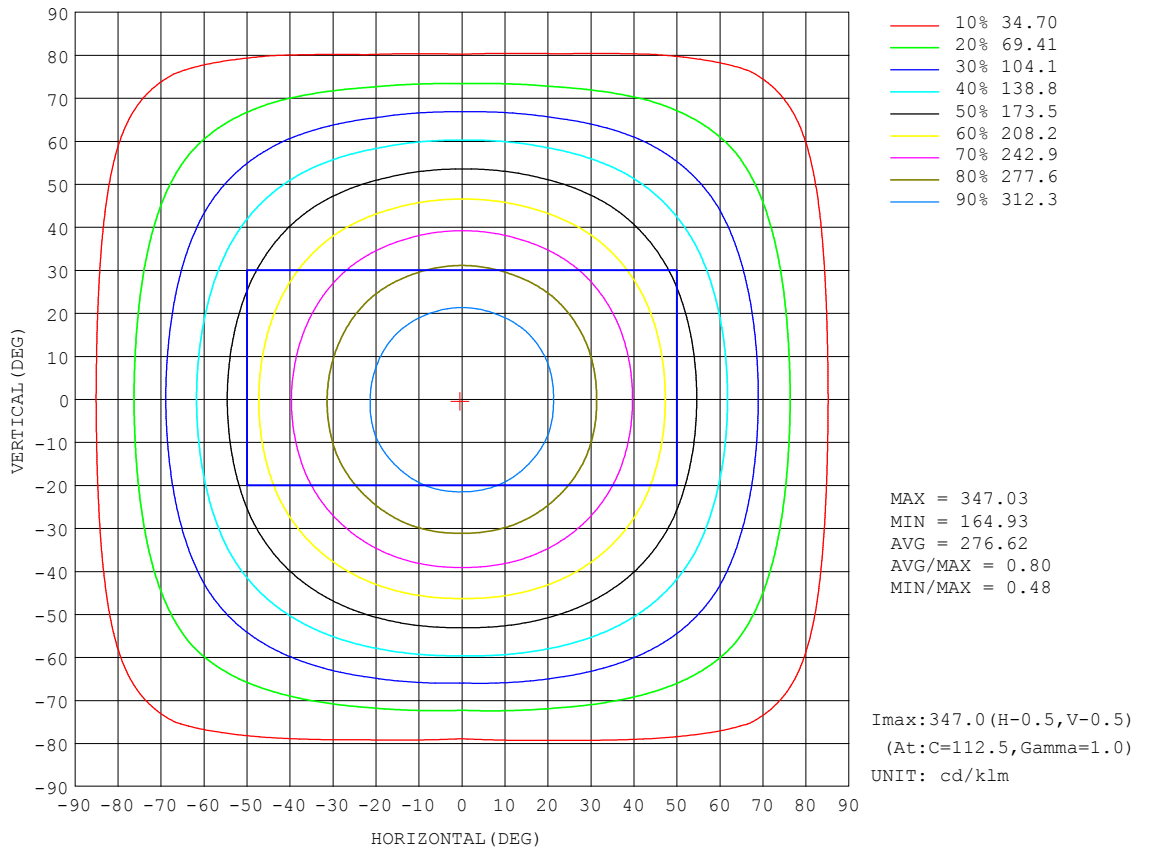


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:23.999V I:0.1904A P:4.5694W PF:1.0000 Freq:0Hz Lamp Flux:477.845x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

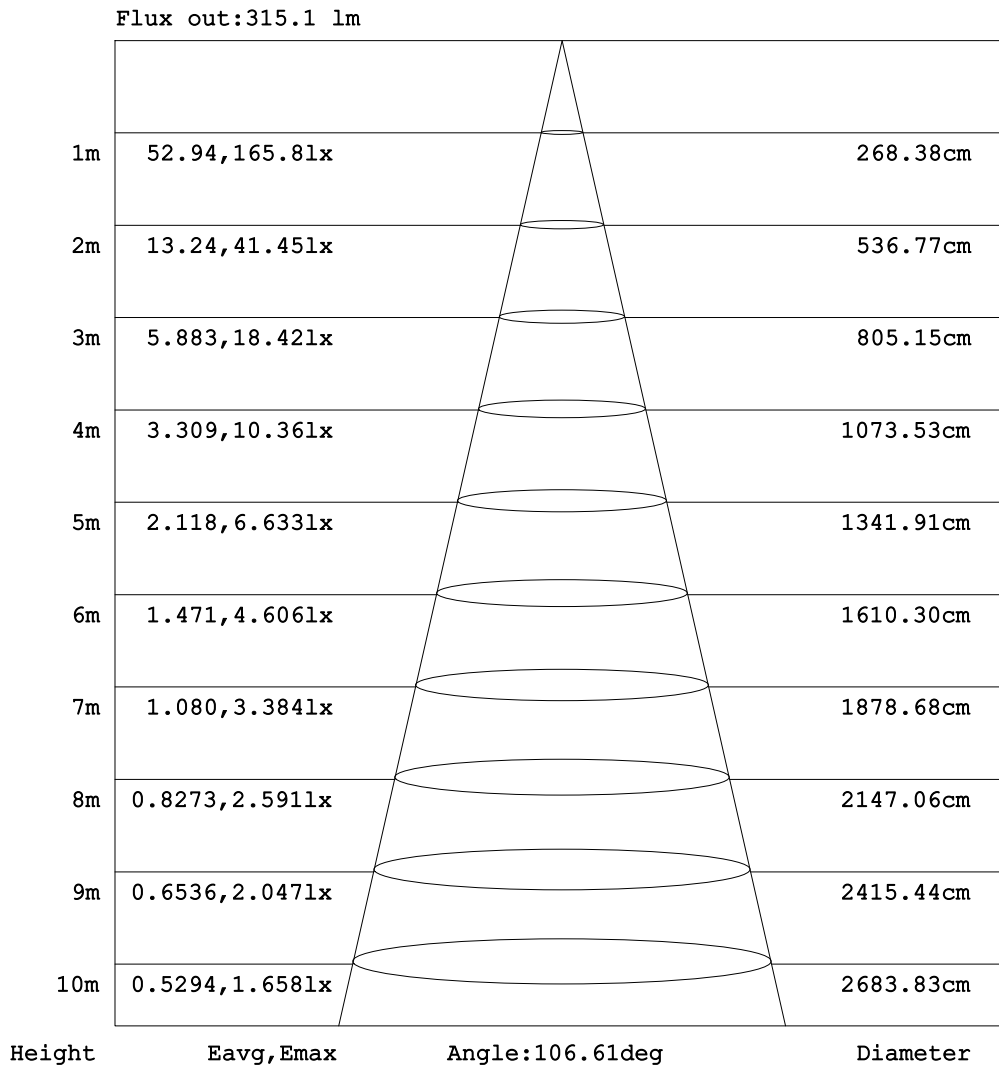


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:23.999V I:0.1904A P:4.5694W PF:1.0000 Freq:0Hz Lamp Flux:477.845x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

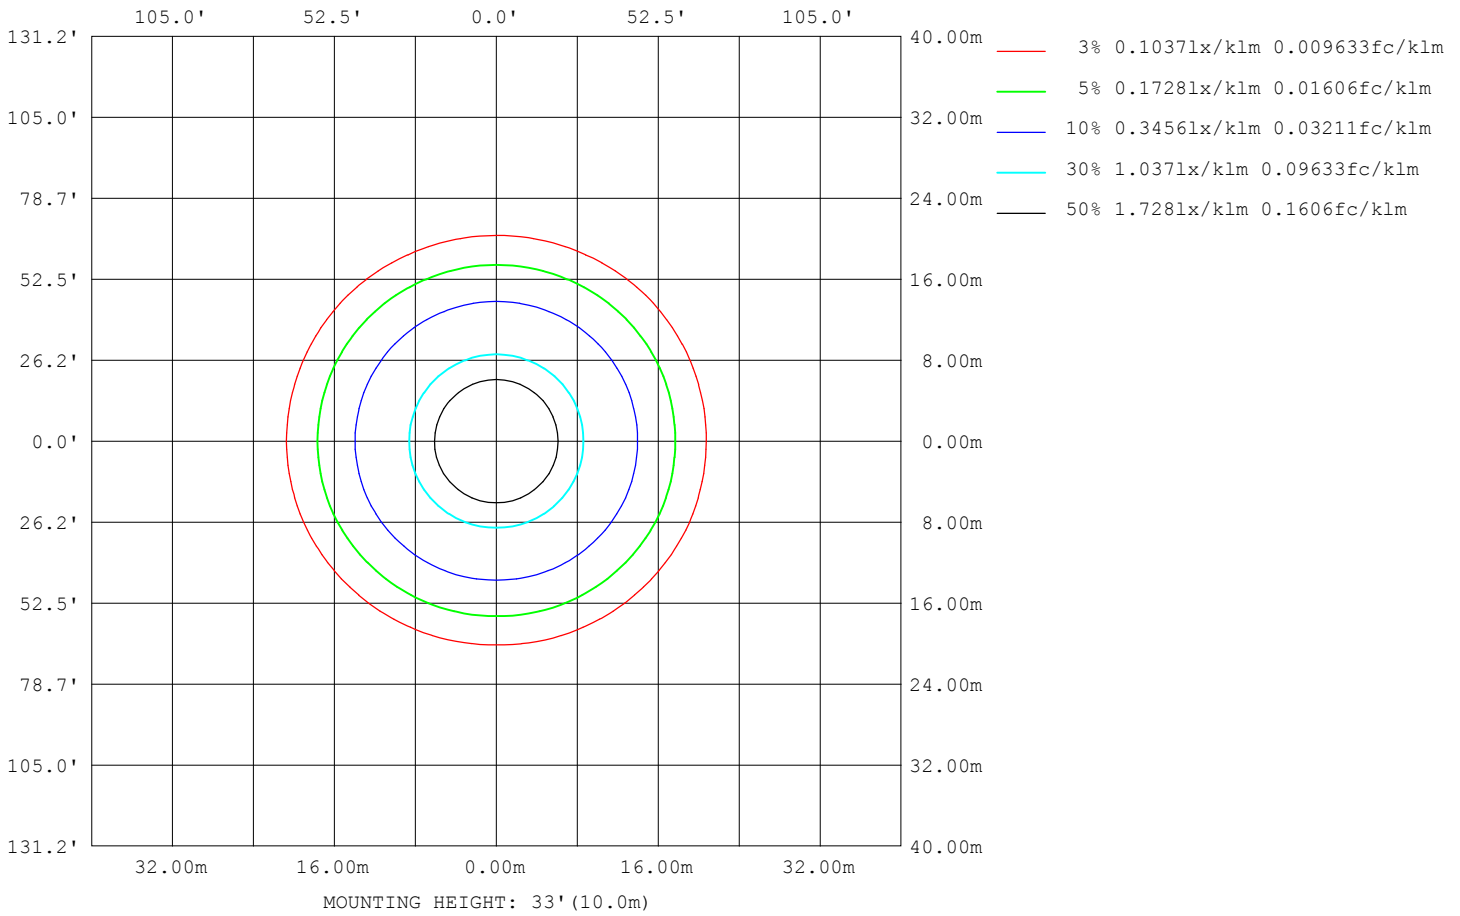

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:23.999V I:0.1904A P:4.5694W PF:1.0000 Freq:0Hz Lamp Flux:477.845x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120


AvgL	cd/m2
L_0~180 (65) av	34865
L_0~180 (75) av	34861
L_0~180 (85) av	48239
L_90~270 (65) av	31527
L_90~270 (75) av	26689
L_90~270 (85) av	16056
L_45 (65) av	33412
L_45 (75) av	31372
L_45 (85) av	35159

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

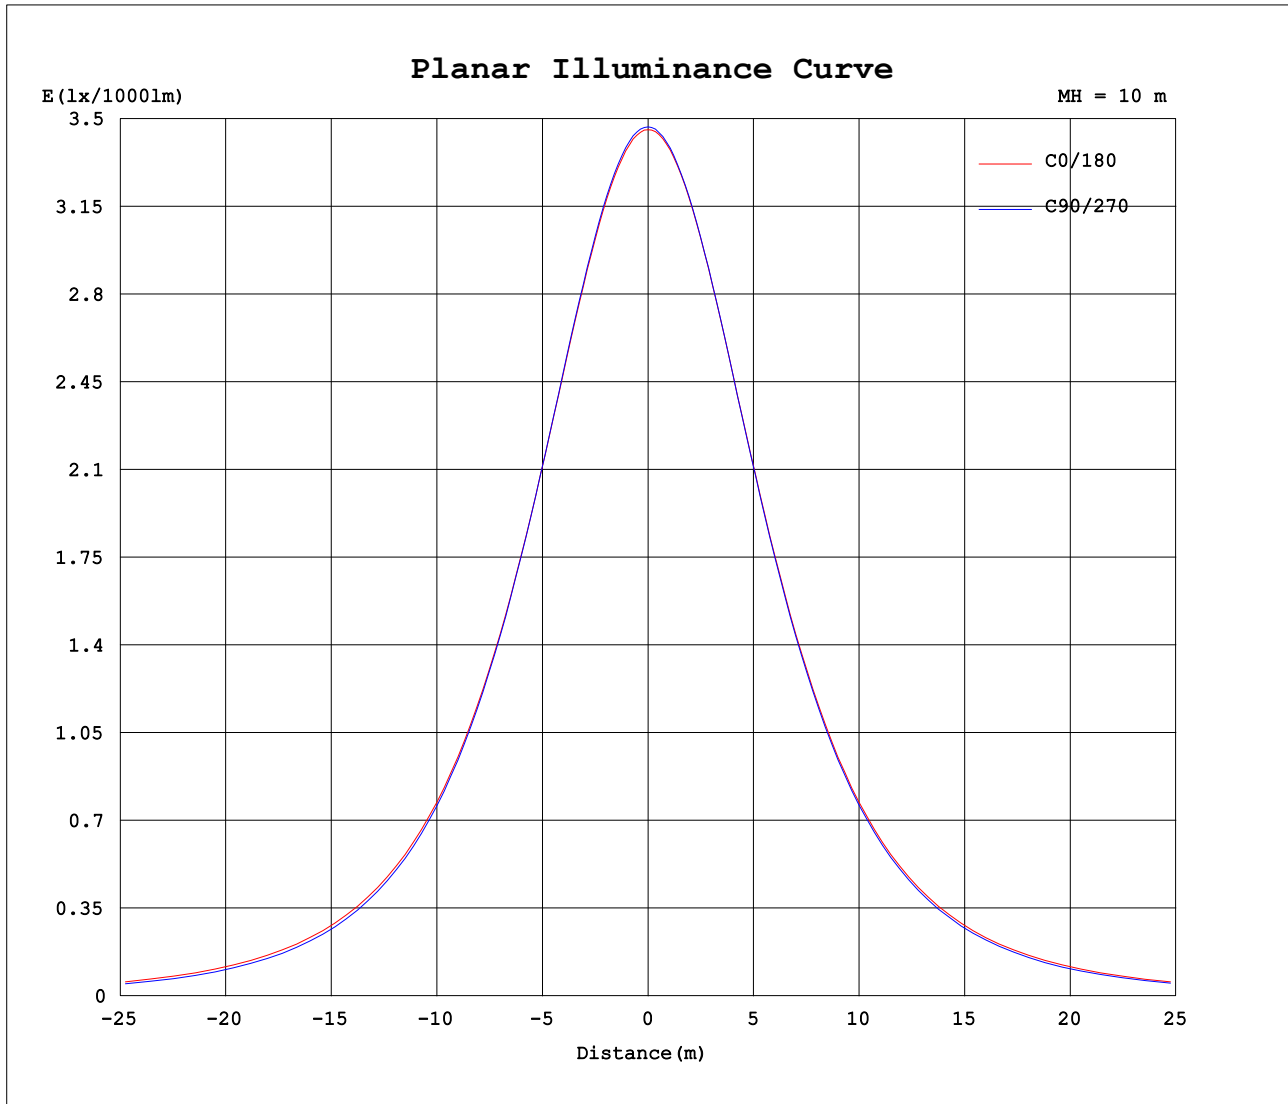

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.999V I:0.1904A P:4.5694W PF:1.0000 Freq:0Hz Lamp Flux:477.845x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

Table--1

UNIT: cd/klm

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	347	347	347	347	347	347	347	347	347	347	347	347	347	347	347	347			
5	344	345	344	345	345	345	345	345	345	345	344	344	345	344	344	344			
10	339	339	339	339	339	339	339	339	339	339	339	338	339	338	338	339			
15	329	330	329	330	330	330	330	330	330	329	329	329	329	329	329	329			
20	317	318	317	317	317	317	317	317	317	316	316	316	316	316	316	317			
25	301	302	301	301	301	301	301	302	302	301	301	300	300	300	301	301			
30	284	284	283	283	282	283	283	284	284	283	283	282	282	281	283	283			
35	264	264	263	263	261	262	262	263	263	263	262	261	261	261	263	263			
40	242	242	241	240	239	240	240	241	242	241	240	239	239	239	241	242			
45	219	220	217	216	215	216	217	219	219	218	217	215	215	216	218	219			
50	196	196	193	192	190	191	192	195	196	195	194	191	191	192	194	196			
55	172	172	168	166	164	165	167	171	172	171	169	166	166	167	170	172			
60	148	147	143	140	137	139	142	146	148	146	144	141	140	141	145	147			
65	123	122	117	113	110	112	116	121	123	122	119	115	114	115	120	123			
70	99.3	97.5	91.8	86.1	82.1	85.5	90.8	96.6	99.0	97.4	93.9	88.6	87.3	89.3	94.9	98.4			
75	75.7	73.4	66.6	59.7	55.0	59.1	65.8	72.7	75.4	73.6	69.3	62.9	60.7	63.6	70.2	74.6			
80	53.8	51.2	43.3	35.1	29.5	34.6	42.6	50.5	53.6	51.4	46.1	38.5	35.5	39.2	47.0	52.3			
85	35.3	32.4	24.5	15.3	9.01	15.0	24.0	31.9	35.1	32.7	26.7	18.0	14.4	18.7	27.4	33.4			
90	22.0	19.5	12.8	4.79	0.48	5.29	12.7	19.4	22.0	19.8	14.1	6.35	1.61	6.74	14.5	20.2			
95	14.3	12.0	7.21	2.90	0.58	3.90	8.77	13.3	15.2	13.4	9.10	4.16	0.53	3.66	8.63	13.4			
100	11.1	9.97	7.03	2.68	0.75	4.00	7.90	11.1	12.3	11.1	7.92	4.13	0.69	3.82	7.53	9.69			
105	10.5	9.34	6.63	2.89	0.94	4.20	7.70	10.5	11.4	10.4	7.69	4.26	0.87	3.63	6.23	9.41			
110	9.79	8.75	6.29	2.91	1.15	4.41	7.66	10.1	10.9	10.0	7.61	4.40	1.06	3.30	6.38	8.88			
115	9.09	8.20	5.41	2.69	1.33	4.57	7.63	9.87	10.6	9.76	7.59	4.44	1.27	2.88	6.06	7.98			
120	7.58	7.17	5.35	2.39	1.53	3.93	7.63	9.68	10.2	9.54	7.51	3.91	1.48	2.57	5.57	7.59			
125	7.53	6.88	5.14	2.16	1.75	3.82	7.56	9.45	9.95	9.29	7.40	3.57	1.69	2.42	5.10	6.95			
130	7.01	6.41	4.52	2.06	1.98	3.35	7.42	9.15	9.61	9.00	7.23	3.40	1.90	2.30	4.43	6.40			
135	6.43	5.87	3.41	2.19	2.15	3.14	6.58	8.81	9.20	8.63	6.33	3.34	2.09	2.27	3.67	5.79			
140	5.57	4.55	3.01	2.41	2.38	2.83	6.01	8.31	8.73	7.98	5.59	2.30	2.32	2.27	3.29	4.95			
145	4.01	3.43	2.73	2.60	2.57	2.60	5.04	6.08	7.30	6.64	4.68	2.49	2.54	2.49	3.08	3.84			
150	3.64	3.10	2.77	2.78	2.77	2.78	4.73	5.87	5.95	5.38	4.77	2.68	2.71	2.68	2.94	3.39			
155	3.20	2.91	2.92	2.93	2.92	2.94	3.78	5.49	5.29	5.05	3.46	2.80	2.87	2.79	2.81	3.12			
160	3.03	3.03	3.06	3.06	3.03	3.06	3.02	4.10	3.97	3.78	2.94	2.95	3.00	2.92	2.94	2.94			
165	3.15	3.12	3.14	3.17	3.15	3.15	3.16	3.16	3.06	2.97	3.08	3.06	3.11	3.07	3.08	3.05			
170	3.20	3.18	3.20	3.23	3.22	3.22	3.18	3.21	3.18	3.12	3.19	3.17	3.21	3.16	3.18	3.16			
175	3.26	3.19	3.28	3.27	3.27	3.26	3.27	3.26	3.23	3.17	3.27	3.28	3.28	3.26	3.25	3.27			
180	3.23	3.17	3.26	3.26	3.25	3.25	3.24	3.24	3.22	3.18	3.24	3.25	3.25	3.23	3.22	3.24			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks: