
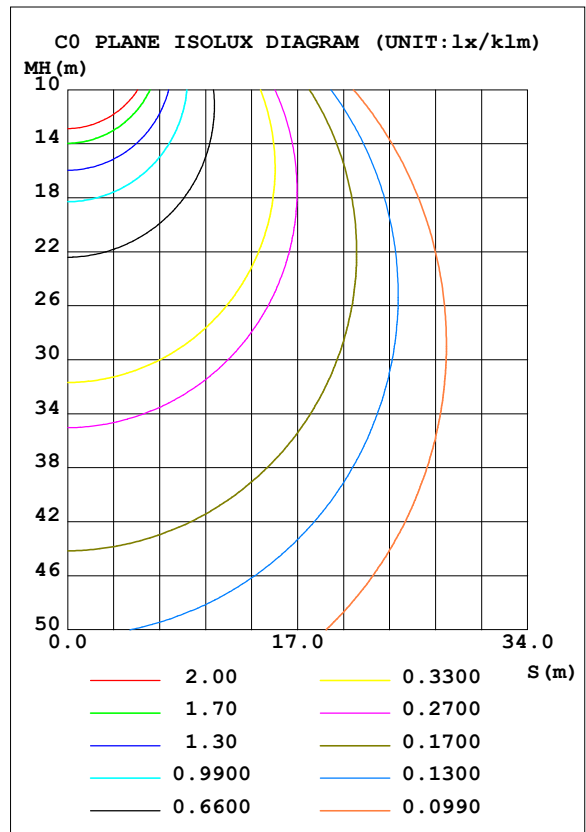


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:23.998V I:0.3750A P:8.9993W PF:1.0000 Freq:0Hz Lamp Flux:869.129x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10 (MM)	Shielding Angle: 120

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	SMD /LED	Imax (cd/klm)	332.2	S/MH (C0/180)	1.26
NOMINAL POWER (W)	8.99	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	24	TOTAL FLUX (lm/klm)	1000.00	η UP, DN (C0-180)	1.7, 48.1
NOMINAL FLUX (lm)	869.129	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.8, 48.4
LAMPS INSIDE	1	η up (%)	3.5	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	η down (%)	96.5	CIBSE SHR MAX	1.35

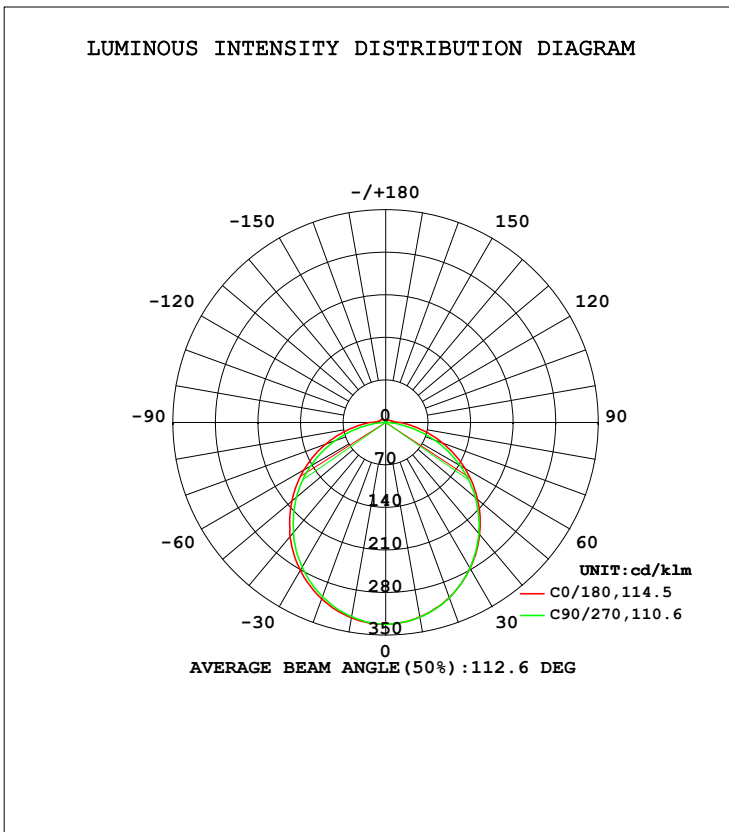

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	324.8	324.7	325.3	325.6	326.4	325.4	324.3	324.4	0- 10	31.36	31.36	3.14,3.14
20	306.5	306.2	306.7	307.6	308.8	306.3	304.8	305.2	10- 20	89.50	120.9	12.1,12.1
30	277.7	277.2	277.2	278.9	281.1	277.6	275.2	276.1	20- 30	135.1	256.0	25.6,25.6
40	240.6	239.7	238.5	241.8	245.4	240.3	235.8	237.8	30- 40	162.5	418.5	41.9,41.9
50	197.7	195.4	192.8	198.1	201.8	196.7	191.7	194.6	40- 50	168.6	587.1	58.7,58.7
60	150.2	146.0	141.2	149.0	155.1	149.2	142.4	146.8	50- 60	154.1	741.2	74.1,74.1
70	100.0	93.12	85.32	96.36	105.6	98.59	89.60	96.02	60- 70	120.4	861.6	86.2,86.2
80	53.75	43.34	30.74	46.26	58.36	49.22	36.40	46.95	70- 80	73.95	935.6	93.6,93.6
90	22.55	13.12	0.6701	14.13	24.67	15.39	1.297	14.86	80- 90	29.50	965.1	96.5,96.5
100	11.87	7.077	0.7753	7.485	12.15	7.320	0.7280	7.260	90-100	9.957	975.0	97.5,97.5
110	9.382	5.882	1.153	6.930	10.08	6.745	1.130	5.811	100-110	6.737	981.8	98.2,98.2
120	7.802	4.893	1.539	6.604	9.117	6.436	1.528	4.602	110-120	5.537	987.3	98.7,98.7
130	6.436	3.528	1.917	6.111	8.246	5.973	1.938	3.092	120-130	4.459	991.8	99.2,99.2
140	4.578	2.823	2.315	5.082	7.211	4.922	2.332	2.546	130-140	3.289	995.0	99.5,99.5
150	3.390	2.824	2.693	4.315	5.522	4.207	2.698	2.664	140-150	2.301	997.3	99.7,99.7
160	2.990	2.968	2.946	2.952	3.555	2.945	2.939	2.901	150-160	1.494	998.8	99.9,99.9
170	3.110	3.137	3.127	3.113	3.082	3.146	3.127	3.109	160-170	0.8576	999.7	100,100
180	3.131	3.174	3.139	3.117	3.127	3.166	3.139	3.117	170-180	0.3001	1000.0	100,100
DEG	LUMINOUS INTENSITY:cd/klm									UNIT:lm/klm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:23.998V I:0.3750A P:8.9993W PF:1.0000 Freq:0Hz Lamp Flux:869.129x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10 (MM)	Shielding Angle: 120

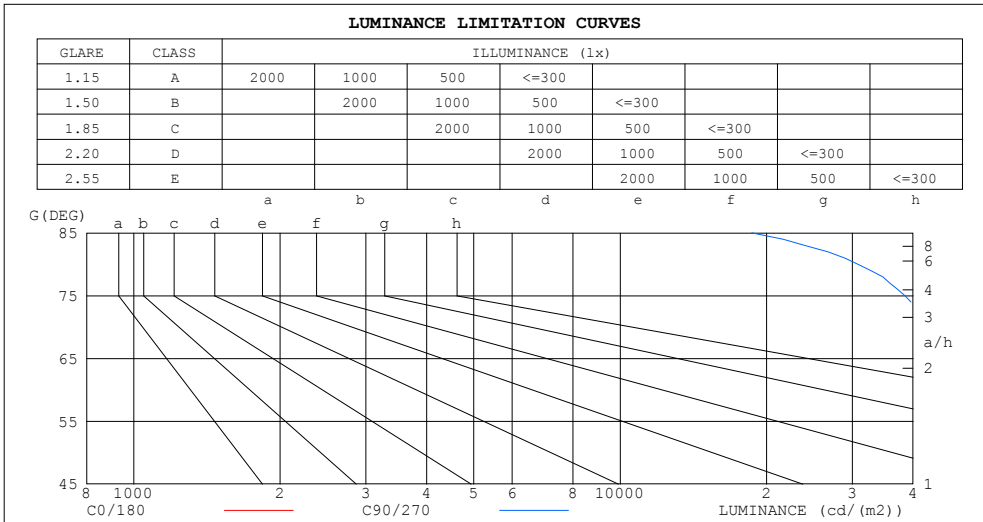

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	70727	18642
80	53708	30785
75	50813	38458
70	50754	43385
65	51290	46634
60	52109	49119
55	52731	50861
50	53352	52159
45	53901	53216


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:23.998V I:0.3750A P:8.9993W PF:1.0000 Freq:0Hz Lamp Flux:869.129x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10(MM)	Shielding Angle: 120

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.02	.98	.94	.90	.96	.92	.95	.91	.88	.90	.88	.85	.86	.84	.82	.80
2.0	.89	.82	.76	.87	.80	.75	.83	.77	.72	.79	.74	.70	.75	.71	.68	.66
3.0	.78	.69	.63	.76	.68	.62	.72	.66	.60	.69	.64	.59	.66	.62	.58	.55
4.0	.69	.60	.53	.67	.59	.53	.64	.57	.51	.62	.55	.50	.59	.54	.49	.47
5.0	.61	.52	.46	.60	.52	.45	.58	.50	.44	.55	.49	.44	.53	.47	.43	.41
6.0	.55	.46	.40	.54	.46	.39	.52	.44	.39	.50	.43	.38	.48	.42	.38	.35
7.0	.50	.41	.35	.49	.41	.35	.47	.40	.34	.45	.39	.34	.44	.38	.33	.31
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.31	.42	.35	.30	.40	.34	.30	.28
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.38	.32	.27	.37	.31	.27	.25
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.34	.29	.24	.23

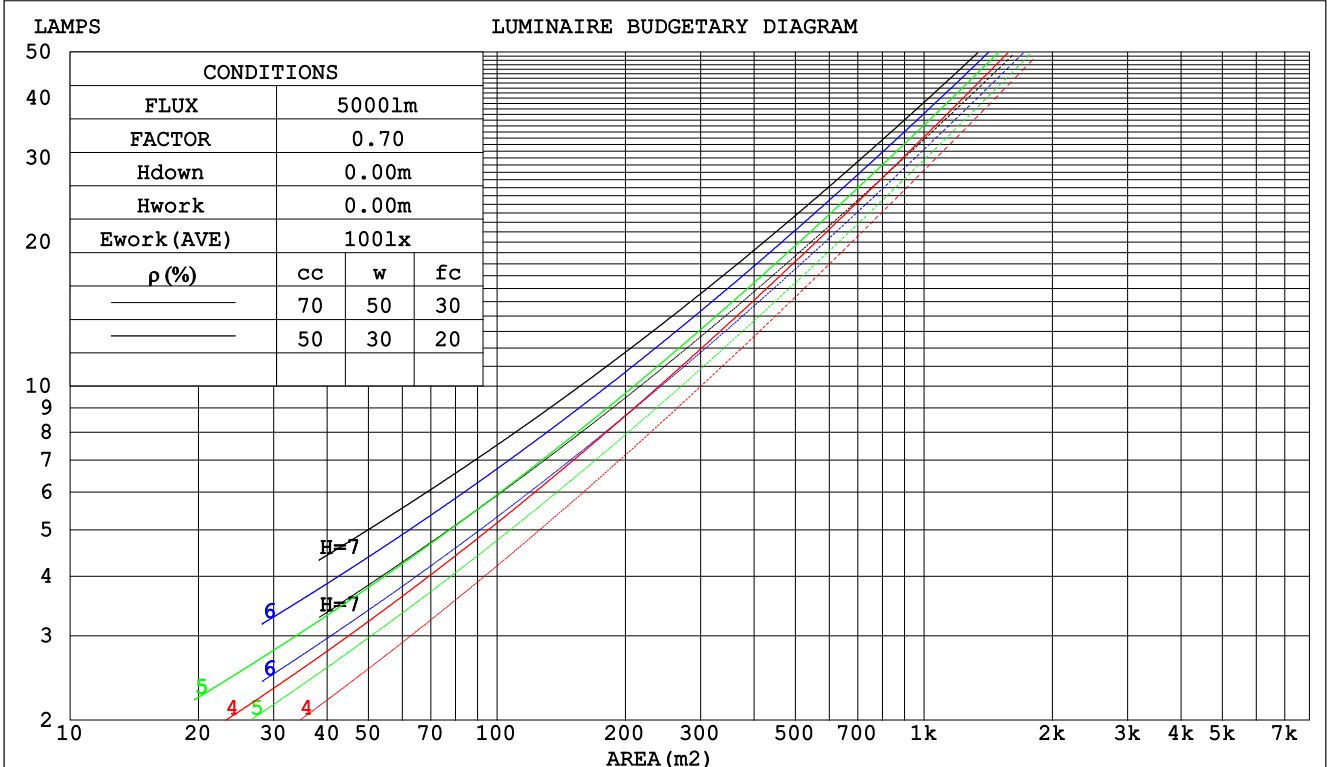

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:23.998V I:0.3750A P:8.9993W PF:1.0000 Freq:0Hz Lamp Flux:869.129x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10(MM)	Shielding Angle: 120

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.323	.184	.058	.315	.180	.057	.300	.172	.055	.286	.165	.053	.273	.158	.051	
2.0	.299	.164	.050	.292	.161	.049	.278	.155	.048	.265	.149	.047	.254	.144	.045	
3.0	.274	.146	.044	.268	.143	.043	.256	.139	.042	.244	.134	.041	.234	.130	.040	
4.0	.252	.131	.038	.246	.129	.038	.235	.125	.037	.225	.121	.036	.216	.117	.036	
5.0	.232	.118	.034	.227	.117	.034	.217	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.215	.108	.031	.210	.106	.031	.202	.103	.030	.193	.100	.030	.186	.098	.029	
7.0	.200	.099	.028	.195	.097	.028	.188	.095	.027	.180	.092	.027	.173	.090	.026	
8.0	.186	.091	.026	.182	.090	.025	.175	.088	.025	.169	.085	.025	.163	.083	.024	
9.0	.174	.084	.024	.171	.083	.023	.165	.081	.023	.159	.079	.023	.153	.078	.022	
10.0	.164	.078	.022	.161	.078	.022	.155	.076	.021	.149	.074	.021	.144	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.217	.217	.217	.186	.186	.186	.127	.127	.127	.073	.073	.073	.023	.023	.023	
1.0	.208	.183	.160	.178	.157	.138	.122	.108	.095	.070	.062	.055	.022	.020	.018	
2.0	.200	.159	.124	.171	.137	.107	.118	.095	.075	.068	.055	.044	.022	.018	.014	
3.0	.192	.141	.101	.165	.122	.087	.113	.085	.061	.065	.050	.036	.021	.016	.012	
4.0	.185	.128	.085	.159	.111	.074	.109	.077	.052	.063	.045	.031	.020	.015	.010	
5.0	.177	.118	.074	.152	.102	.065	.105	.071	.046	.061	.042	.027	.020	.014	.009	
6.0	.170	.110	.066	.146	.095	.058	.101	.067	.041	.059	.039	.024	.019	.013	.008	
7.0	.163	.103	.061	.140	.089	.053	.097	.063	.037	.056	.037	.022	.018	.012	.007	
8.0	.157	.097	.056	.135	.084	.049	.093	.059	.035	.054	.035	.021	.018	.011	.007	
9.0	.151	.092	.053	.130	.080	.046	.090	.056	.033	.052	.033	.019	.017	.011	.006	
10.0	.145	.088	.050	.125	.076	.044	.087	.054	.031	.051	.032	.019	.016	.010	.006	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:23.998V I:0.3750A P:8.9993W PF:1.0000 Freq:0Hz Lamp Flux:869.129x1 lm										
NAME: CLK-01-40K					TYPE: LED Strip			WEIGHT: Kg		
SPEC.: 8.6W					DIM.: 500*10*10(MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.					SUR.: 500*10(MM)			Shielding Angle: 120		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.2	27.8	26.6	28.1	28.5	26.0	27.5	26.4	27.9	28.3
3H	28.2	29.6	28.6	30.0	30.4	27.7	29.1	28.1	29.5	30.0
4H	29.0	30.4	29.5	30.8	31.2	28.3	29.7	28.8	30.1	30.5
6H	29.8	31.0	30.2	31.4	31.9	28.7	29.9	29.2	30.4	30.9
8H	30.1	31.3	30.6	31.7	32.2	28.8	30.0	29.3	30.4	30.9
12H	30.4	31.6	30.9	32.0	32.5	28.8	30.0	29.3	30.4	30.9
4H 2H	26.8	28.1	27.2	28.6	29.0	26.7	28.0	27.1	28.4	28.9
3H	29.0	30.2	29.5	30.6	31.1	28.6	29.8	29.1	30.2	30.7
4H	30.0	31.0	30.5	31.5	32.0	29.4	30.4	29.9	30.9	31.4
6H	30.9	31.8	31.4	32.3	32.9	29.9	30.8	30.4	31.3	31.8
8H	31.3	32.2	31.8	32.7	33.2	30.0	30.9	30.5	31.4	31.9
12H	31.8	32.5	32.3	33.1	33.6	30.1	30.9	30.6	31.4	31.9
8H 4H	30.3	31.2	30.8	31.7	32.2	29.8	30.7	30.3	31.2	31.7
6H	31.4	32.1	31.9	32.6	33.2	30.5	31.2	31.0	31.7	32.3
8H	31.9	32.6	32.5	33.1	33.7	30.7	31.3	31.2	31.9	32.4
12H	32.5	33.1	33.1	33.6	34.3	30.8	31.4	31.4	31.9	32.5
12H 4H	30.3	31.1	30.9	31.6	32.2	29.9	30.7	30.4	31.2	31.7
6H	31.4	32.1	32.0	32.6	33.2	30.6	31.2	31.2	31.8	32.4
8H	32.0	32.6	32.6	33.2	33.8	30.9	31.4	31.4	32.0	32.6
CIE190: 2010										

CIE190: 2010
Area: 0.005 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.0DEG
Test Date:2020-8-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
Humidity:65.0%
Test Distance:7.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:23.998V I:0.3750A P:8.9993W PF:1.0000 Freq:0Hz Lamp Flux:869.129x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10(MM)	Shielding Angle: 120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	37	30
0.80	66	54	46	65	53	46	63	52	46	39
1.00	74	63	55	73	62	55	70	63	54	47
1.25	81	70	63	79	69	62	76	68	61	54
1.50	86	76	68	84	75	68	81	73	67	58
2.00	93	84	77	91	83	76	87	80	74	66
2.50	97	89	82	95	87	81	90	84	79	70
3.00	100	93	87	98	91	86	93	88	83	74
4.00	105	98	93	102	96	92	97	93	89	79
5.00	107	102	97	104	100	96	99	95	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:23.998V I:0.3750A P:8.9993W PF:1.0000 Freq:0Hz Lamp Flux:869.129x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10 (MM)	Shielding Angle: 120

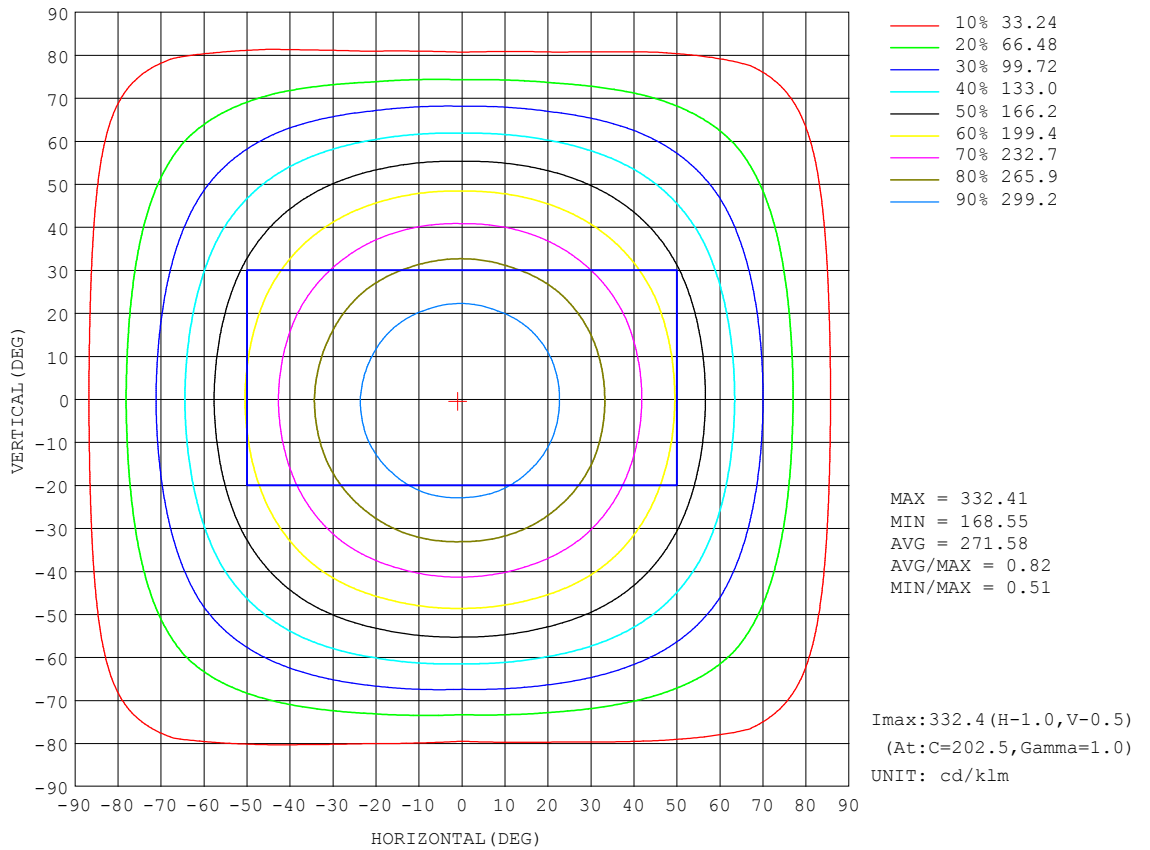


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:23.998V I:0.3750A P:8.9993W PF:1.0000 Freq:0Hz Lamp Flux:869.129x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10 (MM)	Shielding Angle: 120

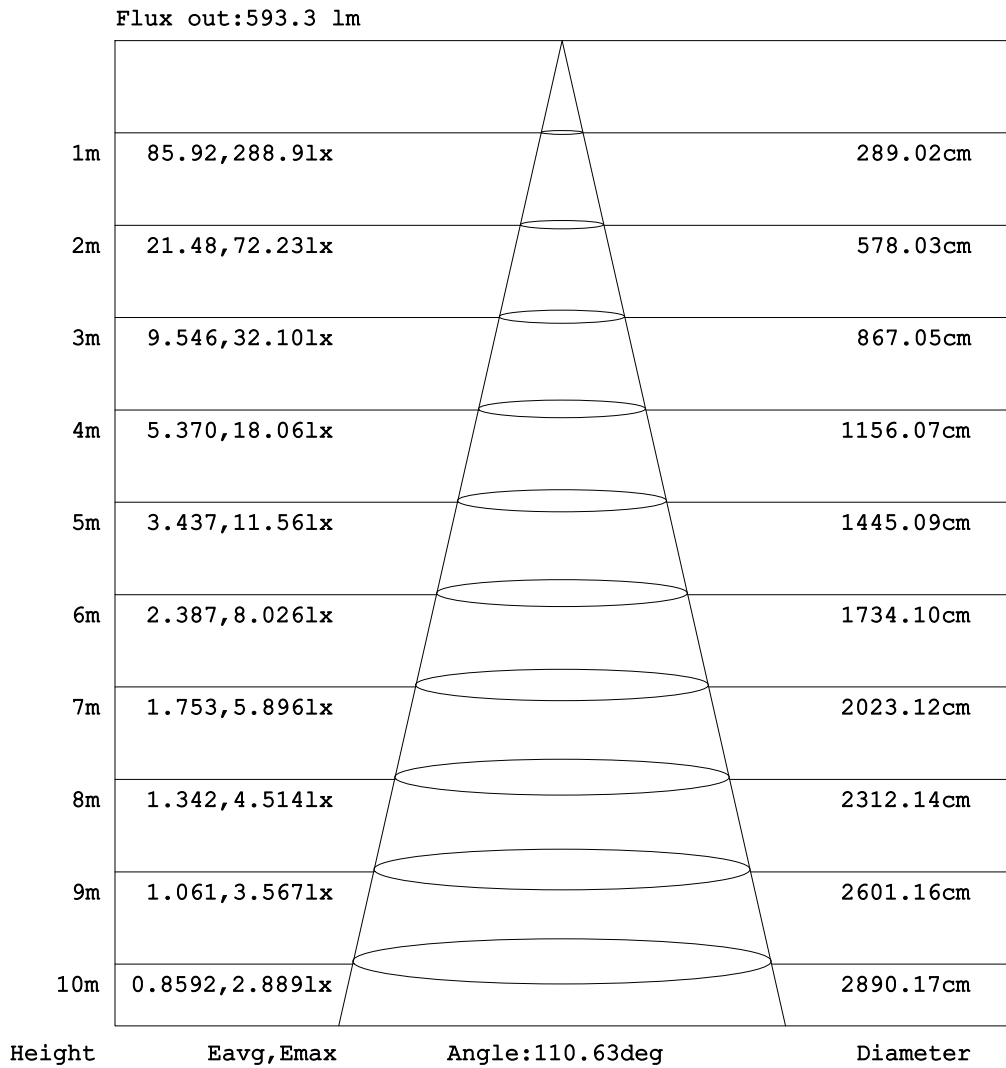


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:23.998V I:0.3750A P:8.9993W PF:1.0000 Freq:0Hz Lamp Flux:869.129x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10 (MM)	Shielding Angle: 120

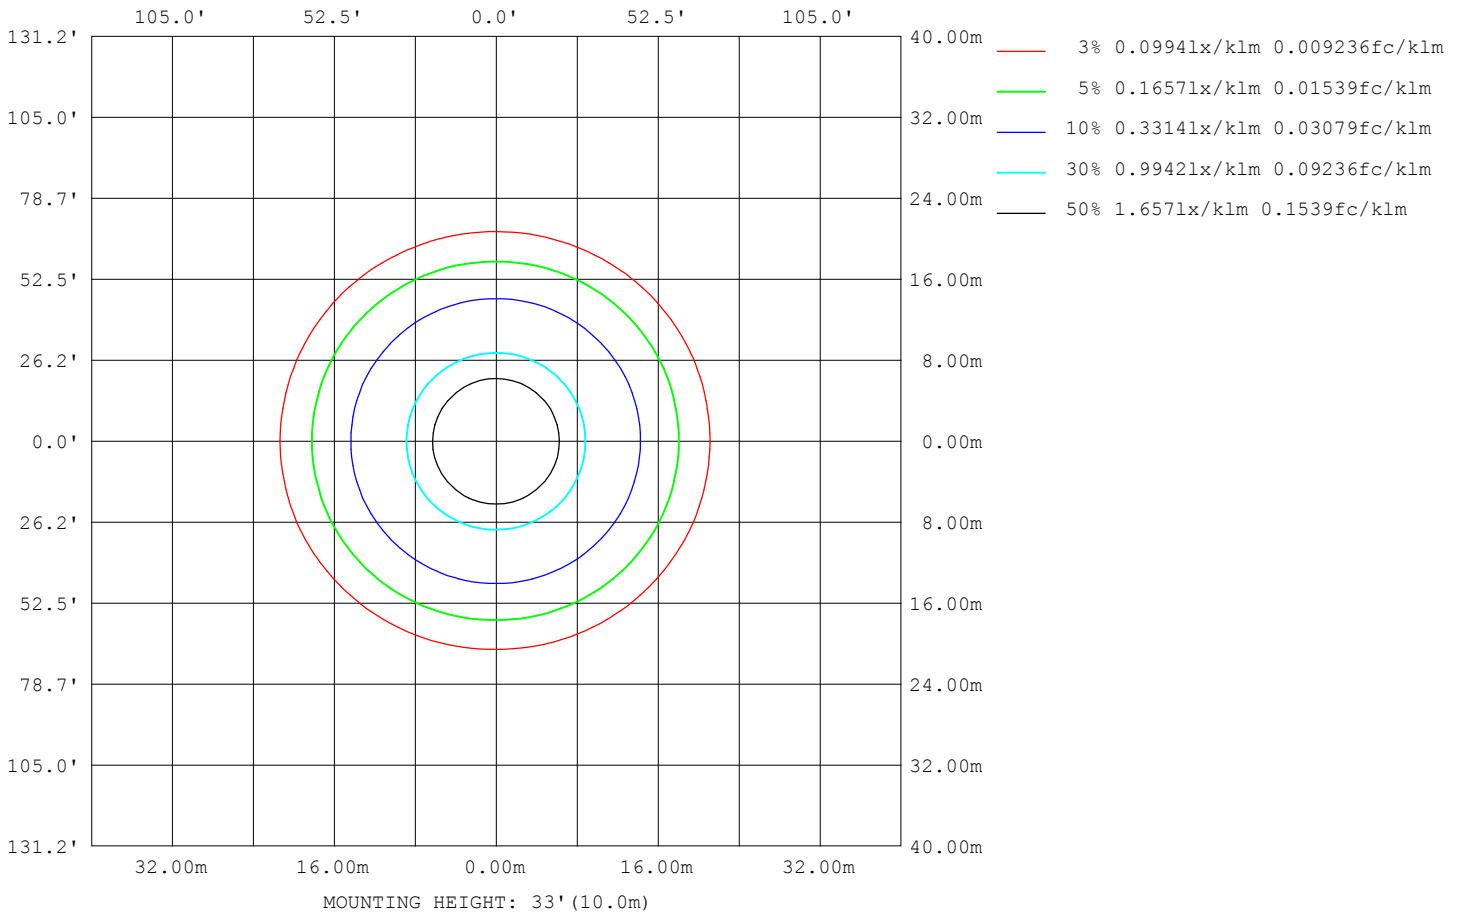

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:23.998V I:0.3750A P:8.9993W PF:1.0000 Freq:0Hz Lamp Flux:869.129x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10(MM)	Shielding Angle: 120


AvgL	cd/m2
L_0~180 (65) av	52534
L_0~180 (75) av	52707
L_0~180 (85) av	74288
L_90~270 (65) av	47193
L_90~270 (75) av	40182
L_90~270 (85) av	23466
L_45 (65) av	50154
L_45 (75) av	47261
L_45 (85) av	53687

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

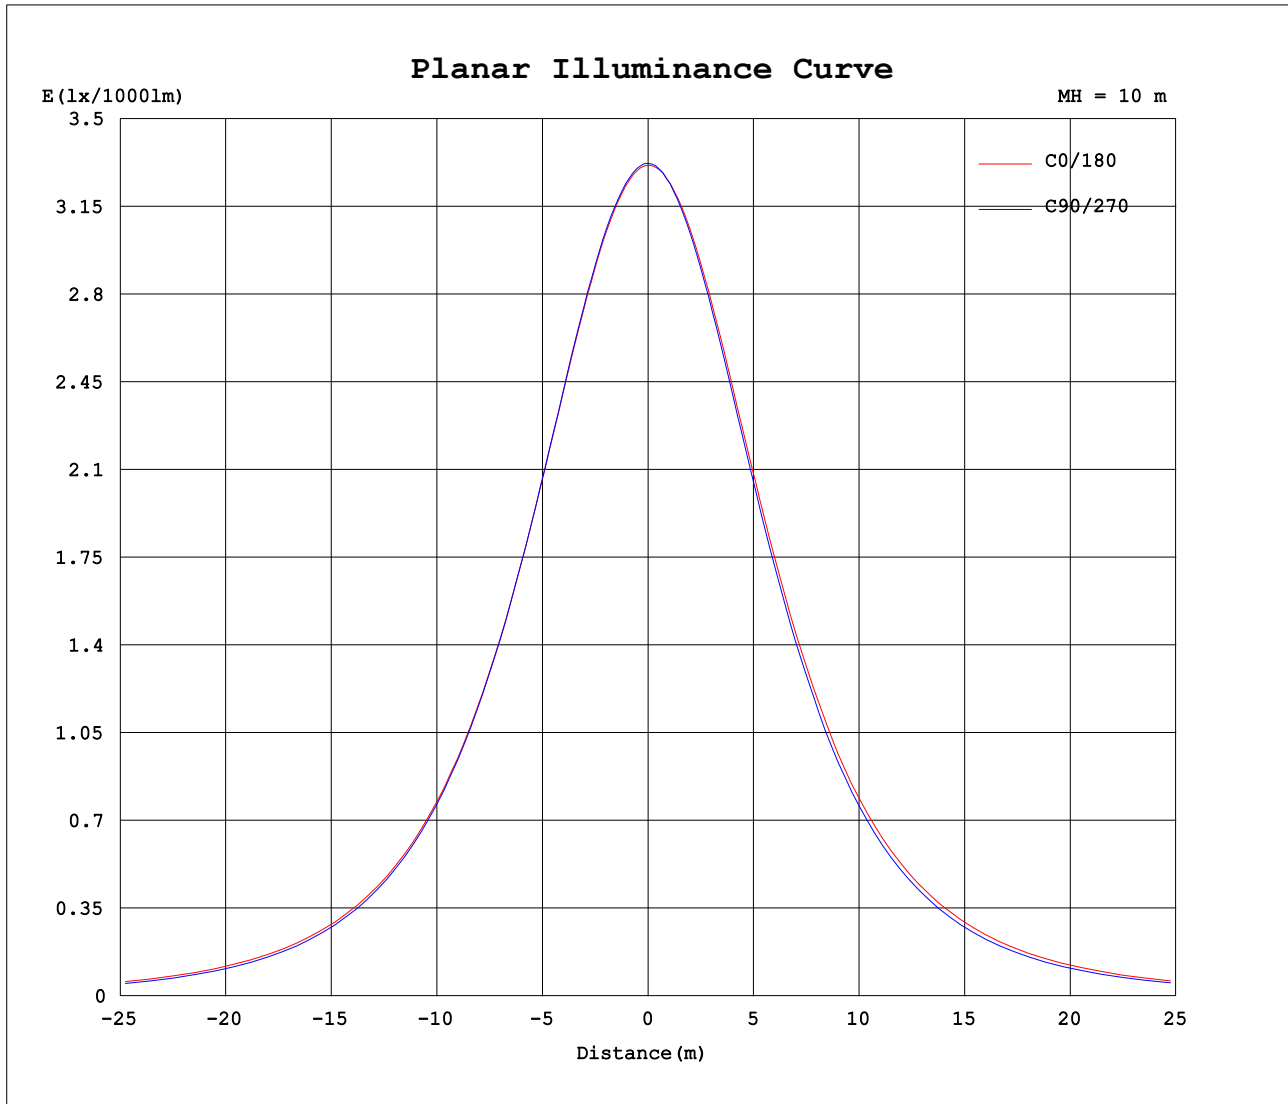

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.998V I:0.3750A P:8.9993W PF:1.0000 Freq:0Hz Lamp Flux:869.129x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10(MM)	Shielding Angle: 120

Table--1

UNIT: cd/klm

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	332	332	332	332	332	332	332	332	332	332	332	332	332	332	332	332			
5	330	330	330	330	330	330	330	331	331	331	330	330	330	330	330	330			
10	325	325	325	325	325	326	326	326	326	326	325	325	324	324	324	325			
15	317	317	317	317	317	318	318	318	319	318	317	316	316	316	316	317			
20	306	307	306	307	307	307	308	308	309	308	306	305	305	304	305	306			
25	293	294	293	293	293	294	295	295	296	295	293	292	291	291	292	292			
30	278	278	277	277	277	279	279	280	281	279	278	276	275	275	276	277			
35	260	261	259	259	259	260	261	263	264	262	260	258	257	257	258	259			
40	241	241	240	238	238	240	242	245	245	243	240	238	236	237	238	240			
45	220	219	218	216	216	218	221	222	224	222	219	216	214	215	217	219			
50	198	197	195	193	193	194	198	200	202	201	197	194	192	193	195	197			
55	174	173	171	168	168	170	174	177	179	178	174	170	168	169	171	174			
60	150	149	146	143	141	144	149	153	155	154	149	145	142	144	147	150			
65	125	124	119	116	113	117	123	128	131	128	124	119	116	117	122	124			
70	100	98.5	93.1	88.3	85.3	89.9	96.4	103	106	103	98.6	92.1	89.6	91.0	96.0	99.4			
75	75.8	73.6	67.2	60.9	57.2	62.6	70.4	77.8	81.2	78.7	73.3	65.8	62.4	64.7	70.7	74.9			
80	53.8	51.1	43.3	35.4	30.7	37.0	46.3	54.7	58.4	55.6	49.2	40.5	36.4	39.5	46.9	52.4			
85	35.5	32.7	24.6	15.2	9.34	16.4	26.6	35.3	39.0	36.0	29.0	19.2	14.2	18.6	27.5	33.7			
90	22.5	20.0	13.1	4.93	0.67	5.72	14.1	21.6	24.7	21.9	15.4	6.64	1.30	6.71	14.9	20.7			
95	15.3	13.4	8.52	3.20	0.59	3.72	8.87	13.9	16.1	14.0	9.14	3.74	0.57	3.86	9.14	13.6			
100	11.9	10.5	7.08	2.99	0.78	3.67	7.48	10.8	12.2	10.7	7.32	3.61	0.73	3.45	7.26	10.5			
105	10.4	9.24	6.40	2.91	0.96	3.74	7.13	9.79	10.8	9.63	6.94	3.66	0.93	3.25	6.46	9.24			
110	9.38	8.32	5.88	2.77	1.15	3.79	6.93	9.30	10.1	9.13	6.75	3.68	1.13	2.99	5.81	8.29			
115	8.52	7.64	5.37	2.33	1.35	3.78	6.79	8.90	9.56	8.73	6.60	3.67	1.33	2.25	5.04	7.23			
120	7.80	6.95	4.89	2.06	1.54	3.54	6.60	8.55	9.12	8.39	6.44	3.44	1.53	2.05	4.60	6.45			
125	7.13	6.32	4.45	2.06	1.74	3.38	6.38	8.20	8.69	8.04	6.23	3.25	1.73	1.91	4.06	6.14			
130	6.44	5.69	3.53	2.09	1.92	3.30	6.11	7.80	8.25	7.65	5.97	3.17	1.94	1.93	3.09	5.39			
135	5.57	4.55	3.21	2.16	2.11	3.08	5.52	7.35	7.74	7.21	5.41	2.85	2.13	2.09	2.77	4.30			
140	4.58	3.88	2.82	2.34	2.31	2.32	5.08	6.79	7.21	6.60	4.92	2.32	2.33	2.29	2.55	3.56			
145	3.89	3.47	2.87	2.55	2.52	2.53	4.72	5.97	6.30	5.79	4.56	2.55	2.54	2.51	2.51	3.15			
150	3.39	2.90	2.82	2.71	2.69	2.70	4.32	5.24	5.52	5.17	4.21	2.70	2.70	2.66	2.66	2.76			
155	3.03	2.98	2.87	2.86	2.82	2.84	2.84	4.64	4.87	4.57	2.82	2.82	2.82	2.78	2.78	2.77			
160	2.99	2.97	2.97	2.96	2.95	2.95	2.95	2.94	3.56	2.85	2.94	2.94	2.94	2.90	2.90	2.89			
165	3.05	3.06	3.08	3.06	3.05	3.05	3.04	3.07	2.97	2.99	3.07	3.04	3.04	3.01	3.01	3.00			
170	3.11	3.11	3.14	3.14	3.13	3.12	3.11	3.14	3.08	3.06	3.15	3.14	3.13	3.09	3.11	3.10			
175	3.17	3.14	3.20	3.17	3.16	3.15	3.15	3.15	3.15	3.12	3.20	3.19	3.16	3.15	3.15	3.15			
180	3.13	3.11	3.17	3.16	3.14	3.13	3.12	3.12	3.13	3.12	3.17	3.16	3.14	3.14	3.12	3.13			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks: