
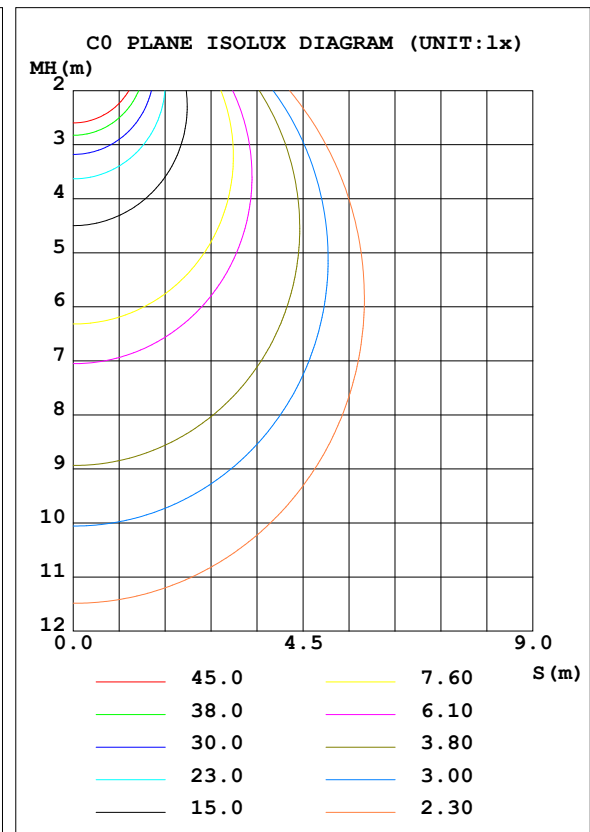


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.001V I:0.3028A P:7.2675W PF:1.0000 Freq:0Hz Lamp Flux:921.791x1 lm		
NAME: UB-AS-DYN276290C	TYPE: LED Strip	WEIGHT:
SPEC.: 15W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

DATA OF LAMP		PHOTOMETRIC DATA Eff: 126.84 lm/W			
MODEL		I <sub>max</sub> (cd)	305.0	S/MH (C0/180)	1.28
NOMINAL POWER (W)		LOR (%)	100.0	S/MH (C90/270)	1.31
RATED VOLTAGE (V)		TOTAL FLUX (lm)	921.80	η UP, DN (C0-180)	0.4, 48.8
NOMINAL FLUX (lm)	921.791	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.4, 50.4
LAMPS INSIDE	1	η up (%)	0.9	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)		η down (%)	99.1	CIBSE SHR MAX	1.35

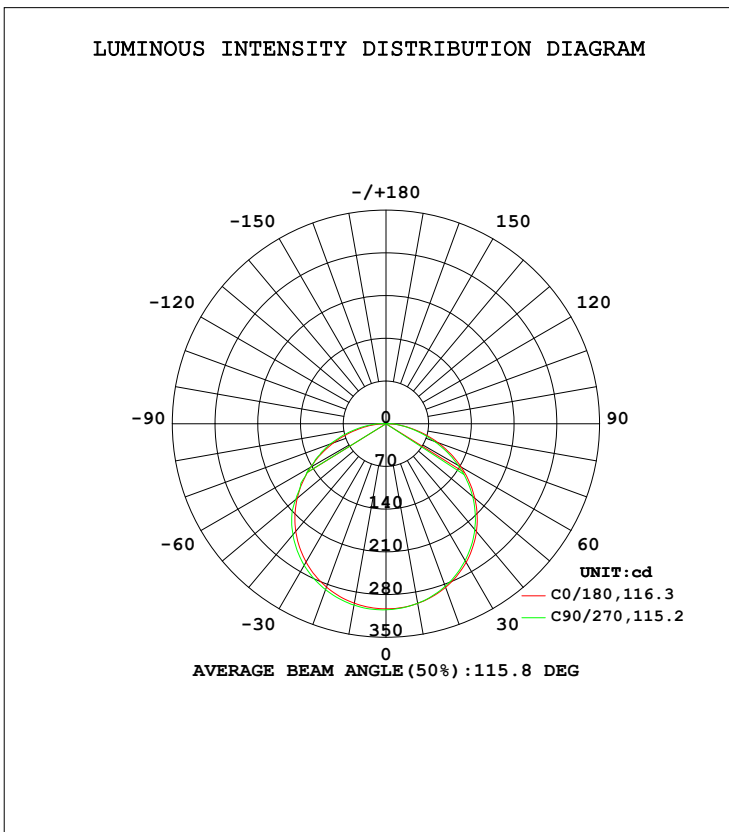

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2023-07-04

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**
**ZONAL FLUX DIAGRAM:**


$\gamma$	C0	C90	C180	C270				$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	299.0	298.7	298.7	301.9				0- 10	28.81	28.81	3.13,3.13
20	285.4	283.4	284.9	289.4				10- 20	82.97	111.8	12.1,12.1
30	262.6	259.2	261.8	268.0				20- 30	127.0	238.8	25.9,25.9
40	230.6	226.4	230.1	237.2				30- 40	155.2	393.9	42.7,42.7
50	190.0	185.2	189.9	193.4				40- 50	163.3	557.2	60.4,60.4
60	142.5	137.0	142.6	142.7				50- 60	148.3	705.5	76.5,76.5
70	90.62	84.42	91.67	97.33				60- 70	115.0	820.5	89,89
80	39.81	36.90	41.00	47.85				70- 80	69.19	889.7	96.5,96.5
90	0.3707	10.27	2.903	12.56				80- 90	24.15	913.9	99.1,99.1
100	0.3323	2.990	0.4068	1.222				90-100	3.221	917.1	99.5,99.5
110	0.4921	0.6404	0.6038	0.4925				100-110	0.8124	917.9	99.6,99.6
120	0.6646	0.7393	0.8008	0.6280				110-120	0.6255	918.5	99.6,99.6
130	0.8737	0.9364	0.9855	0.8126				120-130	0.7229	919.2	99.7,99.7
140	0.9850	1.108	1.133	0.9729				130-140	0.7668	920.0	99.8,99.8
150	1.141	1.256	1.268	1.133				140-150	0.7048	920.7	99.9,99.9
160	1.232	1.367	1.343	1.281				150-160	0.5756	921.3	99.9,99.9
170	1.349	1.430	1.350	1.357				160-170	0.3829	921.7	100,100
180	1.379	1.429	1.355	1.392				170-180	0.1315	921.8	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-07-04

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.001V I:0.3028A P:7.2675W PF:1.0000 Freq:0Hz Lamp Flux:921.791x1 lm		
NAME: UB-AS-DYN276290C	TYPE: LED Strip	WEIGHT:
SPEC.: 15W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

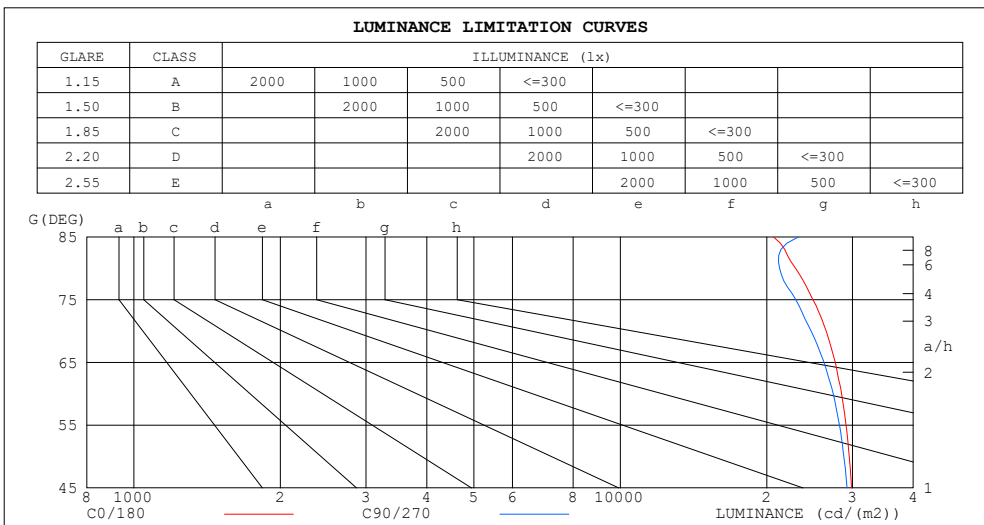

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	20650	23219
80	22924	21252
75	24874	22942
70	26494	24682
65	27659	26230
60	28502	27392
55	29105	28210
50	29560	28805
45	29873	29233


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-07-04

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:24.001V I:0.3028A P:7.2675W PF:1.0000 Freq:0Hz Lamp Flux:921.791x1 lm		
NAME: UB-AS-DYN276290C	TYPE: LED Strip	WEIGHT:
SPEC.: 15W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.89	.82	.77	.88	.81	.76	.84	.78	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.78	.70	.63	.77	.69	.63	.74	.67	.61	.71	.65	.60	.68	.63	.59	.57
4.0	.69	.60	.53	.68	.59	.53	.65	.58	.52	.63	.56	.51	.60	.55	.51	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.50	.44	.54	.48	.44	.42
6.0	.56	.46	.40	.55	.46	.40	.53	.45	.39	.51	.44	.39	.49	.43	.38	.36
7.0	.50	.41	.35	.49	.41	.35	.48	.40	.35	.46	.39	.34	.45	.39	.34	.32
8.0	.46	.37	.31	.45	.37	.31	.44	.36	.31	.42	.36	.31	.41	.35	.30	.28
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.26
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

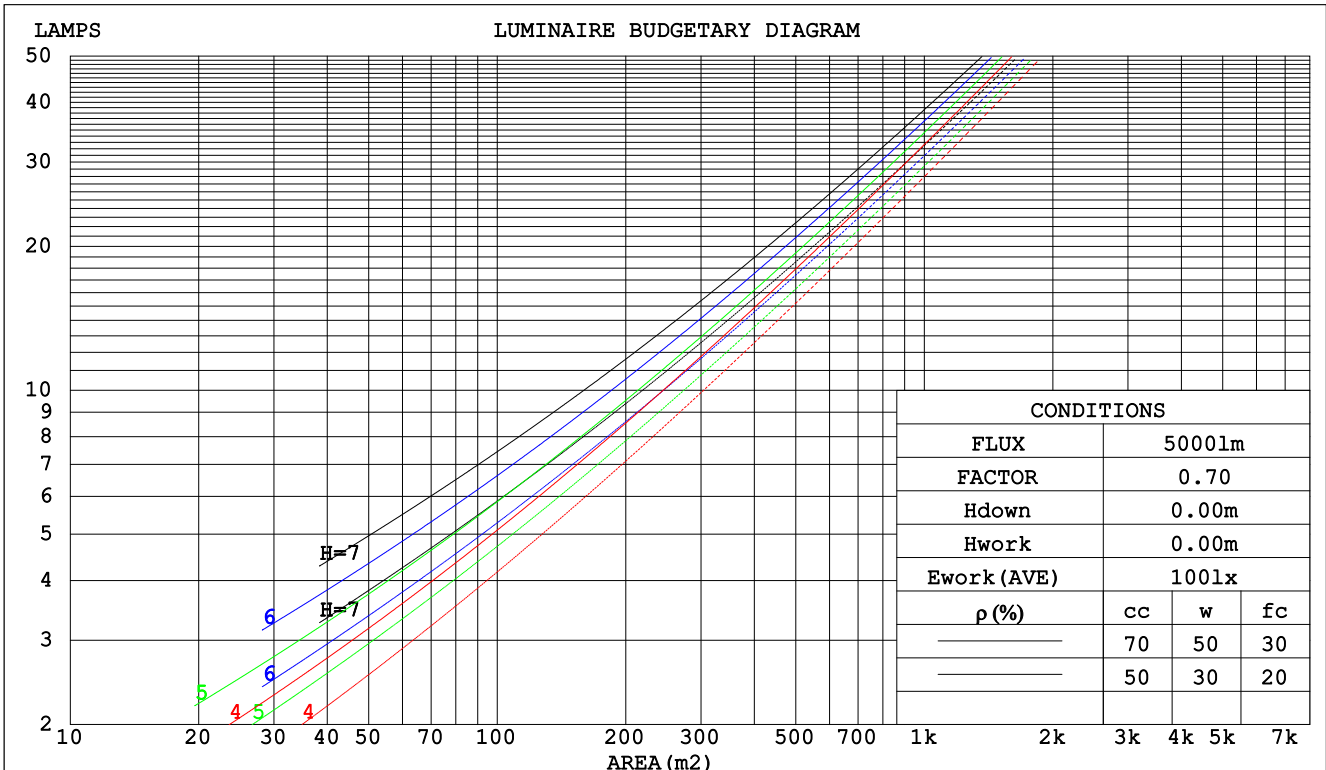

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-07-04

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:24.001V I:0.3028A P:7.2675W PF:1.0000 Freq:0Hz Lamp Flux:921.791x1 lm									
NAME: UB-AS-DYN276290C					TYPE: LED Strip			WEIGHT:	
SPEC.: 15W					DIM.: 1000*10*2 (MM)			SERIAL No.: 001	
MFR.: Flexfire LEDs, Inc.					SUR.: 0.01*1			Shielding Angle: 120	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.321	.183	.058	.314	.179	.057	.300	.172	.055	.287	.166	.053	.276	.160	.052	
2.0	.299	.164	.050	.292	.161	.050	.280	.156	.048	.269	.151	.047	.259	.146	.046	
3.0	.275	.146	.044	.269	.144	.043	.259	.140	.043	.249	.136	.042	.239	.132	.041	
4.0	.253	.131	.039	.248	.130	.038	.238	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.233	.119	.034	.229	.117	.034	.220	.115	.034	.212	.112	.033	.205	.109	.033	
6.0	.216	.108	.031	.212	.107	.031	.204	.105	.030	.197	.102	.030	.191	.100	.030	
7.0	.201	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.092	.027	
8.0	.187	.092	.026	.184	.091	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.157	.080	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.022	.148	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.197	.197	.197	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.188	.163	.140	.161	.140	.121	.110	.096	.083	.063	.056	.048	.020	.018	.016	
2.0	.180	.139	.104	.154	.119	.090	.106	.083	.063	.061	.048	.037	.020	.016	.012	
3.0	.172	.121	.080	.148	.104	.070	.101	.073	.049	.059	.042	.029	.019	.014	.009	
4.0	.165	.108	.064	.141	.093	.056	.097	.065	.039	.056	.038	.023	.018	.012	.008	
5.0	.157	.097	.053	.135	.084	.047	.093	.059	.033	.054	.035	.019	.017	.011	.006	
6.0	.150	.089	.046	.129	.077	.040	.089	.054	.028	.052	.032	.017	.017	.010	.006	
7.0	.143	.082	.040	.123	.071	.035	.085	.050	.025	.049	.029	.015	.016	.010	.005	
8.0	.136	.076	.035	.117	.066	.031	.081	.047	.022	.047	.027	.013	.015	.009	.004	
9.0	.130	.072	.032	.112	.062	.028	.078	.044	.020	.045	.026	.012	.015	.008	.004	
10.0	.125	.067	.029	.107	.058	.025	.074	.041	.018	.043	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-07-04

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:24.001V I:0.3028A P:7.2675W PF:1.0000 Freq:0Hz Lamp Flux:921.791x1 lm										
NAME: UB-AS-DYN276290C					TYPE: LED Strip			WEIGHT:		
SPEC.: 15W					DIM.: 1000*10*2 (MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.					SUR.: 0.01*1			Shielding Angle: 120		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.8	26.3	25.1	26.6	26.8	24.7	26.2	24.9	26.4	26.6
3H	26.4	27.8	26.7	28.0	28.3	26.2	27.6	26.5	27.8	28.1
4H	27.0	28.4	27.3	28.6	28.9	26.8	28.1	27.1	28.4	28.6
6H	27.5	28.8	27.8	29.0	29.3	27.2	28.5	27.5	28.7	29.0
8H	27.6	28.9	28.0	29.2	29.5	27.3	28.6	27.7	28.9	29.2
12H	27.8	28.9	28.1	29.2	29.6	27.5	28.7	27.8	29.0	29.3
4H 2H	25.4	26.7	25.7	27.0	27.3	25.3	26.6	25.6	26.9	27.2
3H	27.2	28.3	27.5	28.7	29.0	27.0	28.2	27.3	28.5	28.8
4H	27.9	29.0	28.3	29.3	29.7	27.7	28.8	28.1	29.1	29.5
6H	28.5	29.5	28.9	29.9	30.2	28.3	29.2	28.7	29.6	30.0
8H	28.7	29.6	29.2	30.0	30.4	28.5	29.4	28.9	29.8	30.2
12H	28.9	29.7	29.3	30.1	30.6	28.7	29.5	29.1	29.9	30.3
8H 4H	28.2	29.1	28.6	29.5	29.9	28.0	28.9	28.4	29.3	29.7
6H	28.9	29.7	29.4	30.1	30.6	28.7	29.5	29.2	29.9	30.3
8H	29.3	29.9	29.7	30.4	30.8	29.0	29.7	29.5	30.1	30.6
12H	29.5	30.1	30.0	30.5	31.0	29.3	29.9	29.8	30.4	30.8
12H 4H	28.2	29.0	28.6	29.4	29.8	28.0	28.8	28.4	29.2	29.6
6H	29.0	29.7	29.5	30.1	30.6	28.8	29.4	29.2	29.9	30.4
8H	29.4	29.9	29.9	30.4	30.9	29.1	29.7	29.6	30.2	30.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 921.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.3)  
 Area: 0.01 m2

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-07-04

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:24.001V I:0.3028A P:7.2675W PF:1.0000 Freq:0Hz Lamp Flux:921.791x1 lm		
NAME: UB-AS-DYN276290C	TYPE: LED Strip	WEIGHT:
SPEC.: 15W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	45	38	56	44	37	54	44	37	31
0.80	66	55	47	65	54	47	63	53	46	39
1.00	75	63	56	74	63	56	71	64	55	48
1.25	82	71	64	80	70	63	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	78	92	84	78	88	81	76	68
2.50	98	90	84	96	88	83	92	86	81	72
3.00	101	94	88	99	93	87	95	90	85	76
4.00	105	99	95	103	98	93	99	94	90	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-07-04

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:24.001V I:0.3028A P:7.2675W PF:1.0000 Freq:0Hz Lamp Flux:921.791x1 lm		
NAME: UB-AS-DYN276290C	TYPE: LED Strip	WEIGHT:
SPEC.: 15W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

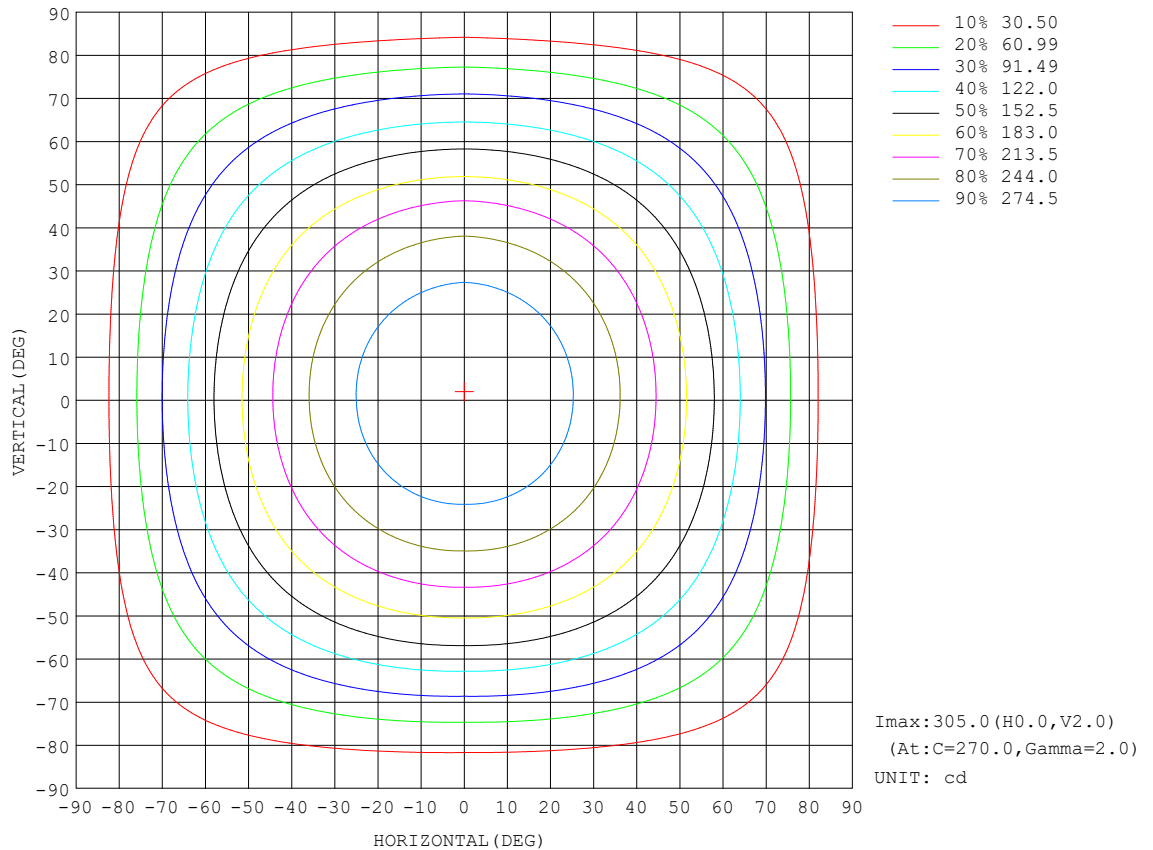


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2023-07-04

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:24.001V I:0.3028A P:7.2675W PF:1.0000 Freq:0Hz Lamp Flux:921.791x1 lm		
NAME: UB-AS-DYN276290C	TYPE: LED Strip	WEIGHT:
SPEC.: 15W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

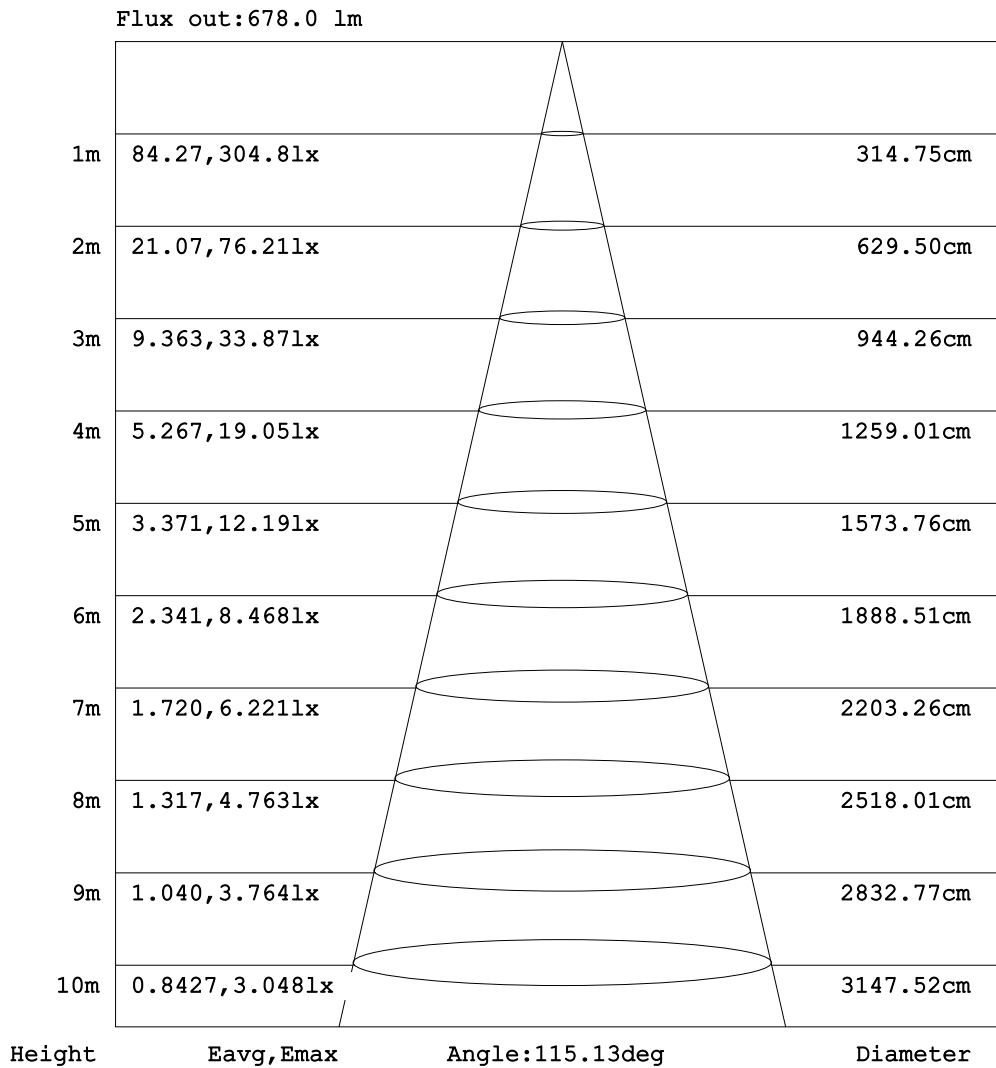


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-07-04

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:24.001V I:0.3028A P:7.2675W PF:1.0000 Freq:0Hz Lamp Flux:921.791x1 lm		
NAME: UB-AS-DYN276290C	TYPE: LED Strip	WEIGHT:
SPEC.: 15W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

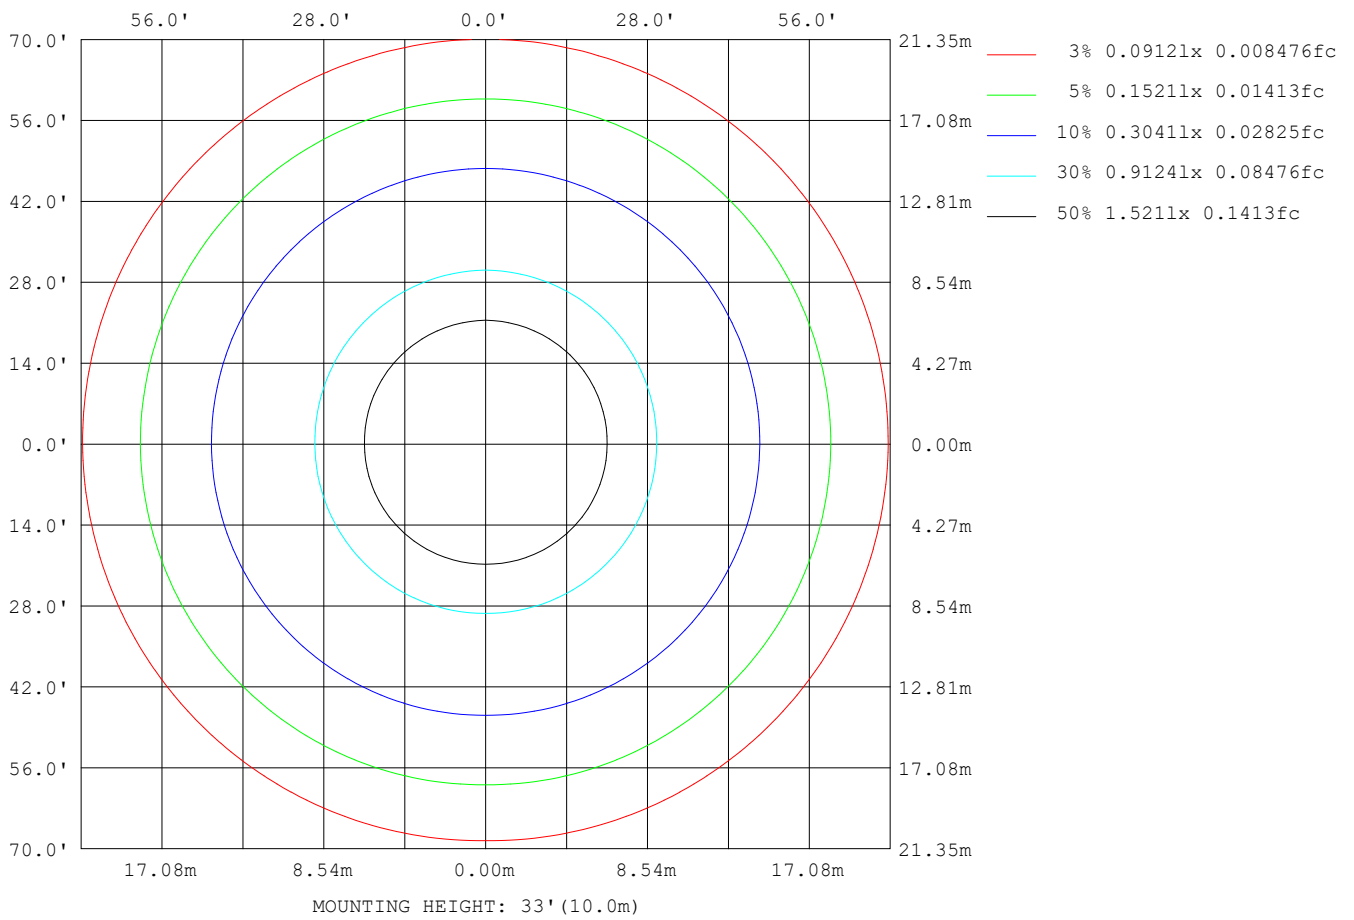

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-07-04

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:24.001V I:0.3028A P:7.2675W PF:1.0000 Freq:0Hz Lamp Flux:921.791x1 lm		
NAME: UB-AS-DYN276290C	TYPE: LED Strip	WEIGHT:
SPEC.: 15W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120


AvgL	cd/m2
L_0~180 (65) av	27721
L_0~180 (75) av	25090
L_0~180 (85) av	21377
L_90~270 (65) av	27222
L_90~270 (75) av	25517
L_90~270 (85) av	27399
L_45 (65) av	27413
L_45 (75) av	25370
L_45 (85) av	25186

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-07-04

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

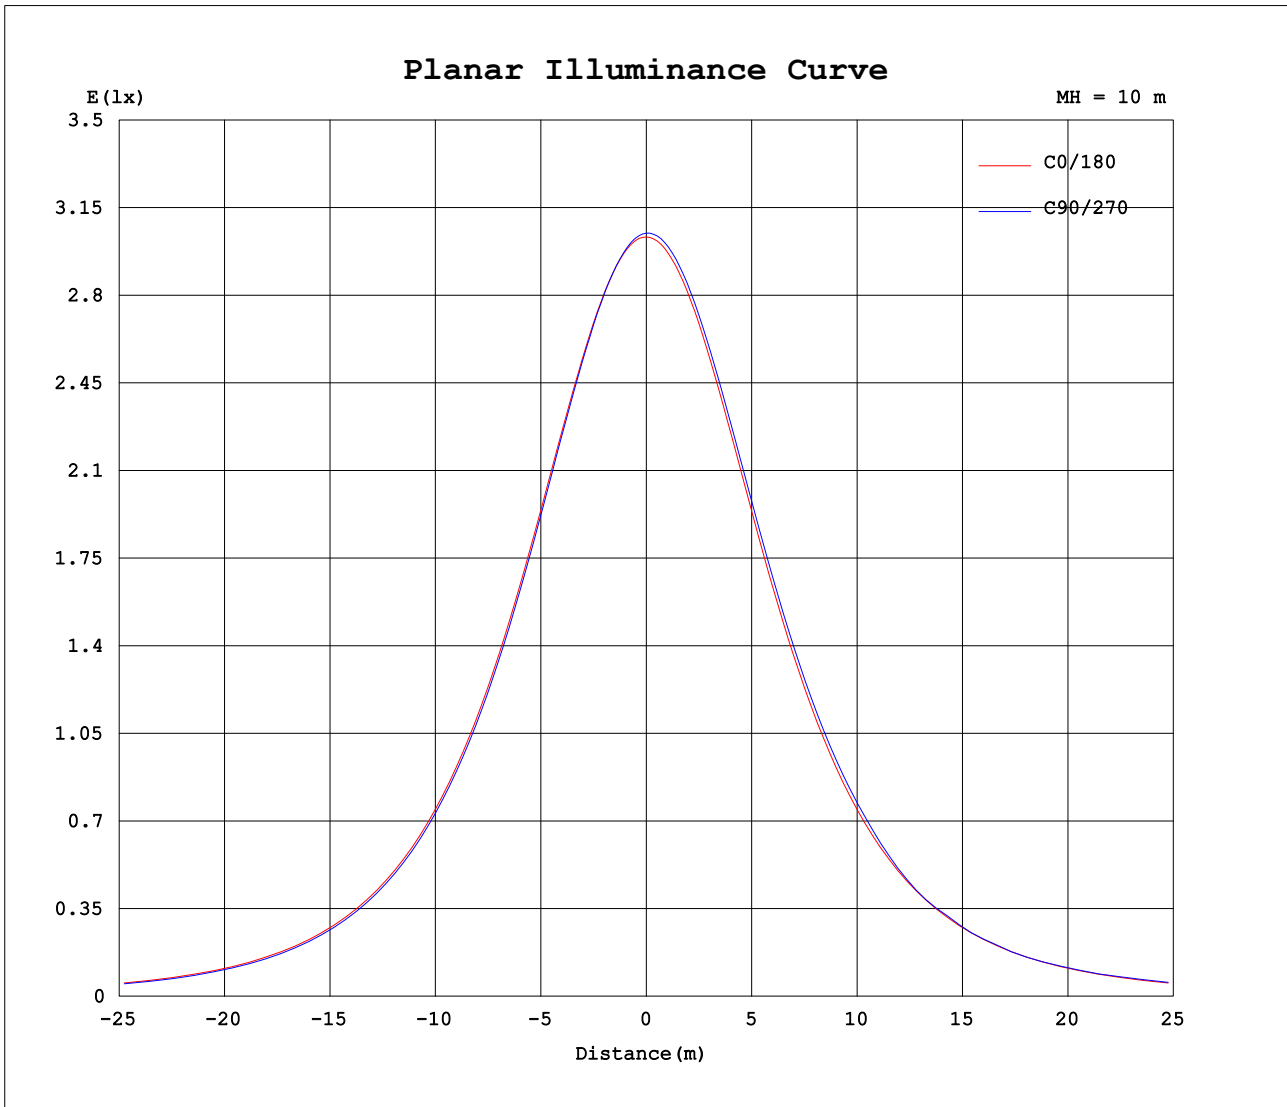

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2023-07-04

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.001V I:0.3028A P:7.2675W PF:1.0000 Freq:0Hz Lamp Flux:921.791x1 lm		
NAME: UB-AS-DYN276290C	TYPE: LED Strip	WEIGHT:
SPEC.: 15W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	303	305	303	305															
5	302	303	302	305															
10	299	299	299	302															
15	293	292	293	297															
20	285	283	285	289															
25	275	272	275	280															
30	263	259	262	268															
35	248	244	247	254															
40	231	226	230	237															
45	211	207	211	219															
50	190	185	190	193															
55	167	162	167	170															
60	143	137	143	143															
65	117	111	117	119															
70	90.6	84.4	91.7	97.3															
75	64.4	59.4	65.5	72.7															
80	39.8	36.9	41.0	47.9															
85	18.0	20.2	19.3	27.5															
90	0.37	10.3	2.90	12.6															
95	0.31	5.36	0.36	4.33															
100	0.33	2.99	0.41	1.22															
105	0.39	1.44	0.52	0.51															
110	0.49	0.64	0.60	0.49															
115	0.57	0.69	0.69	0.55															
120	0.66	0.74	0.80	0.63															
125	0.74	0.85	0.89	0.74															
130	0.87	0.94	0.99	0.81															
135	0.97	1.03	1.06	0.95															
140	0.98	1.11	1.13	0.97															
145	1.05	1.18	1.19	1.07															
150	1.14	1.26	1.27	1.13															
155	1.18	1.31	1.30	1.17															
160	1.23	1.37	1.34	1.28															
165	1.32	1.42	1.35	1.35															
170	1.35	1.43	1.35	1.36															
175	1.37	1.43	1.35	1.36															
180	1.38	1.43	1.35	1.39															

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-07-04

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks: