
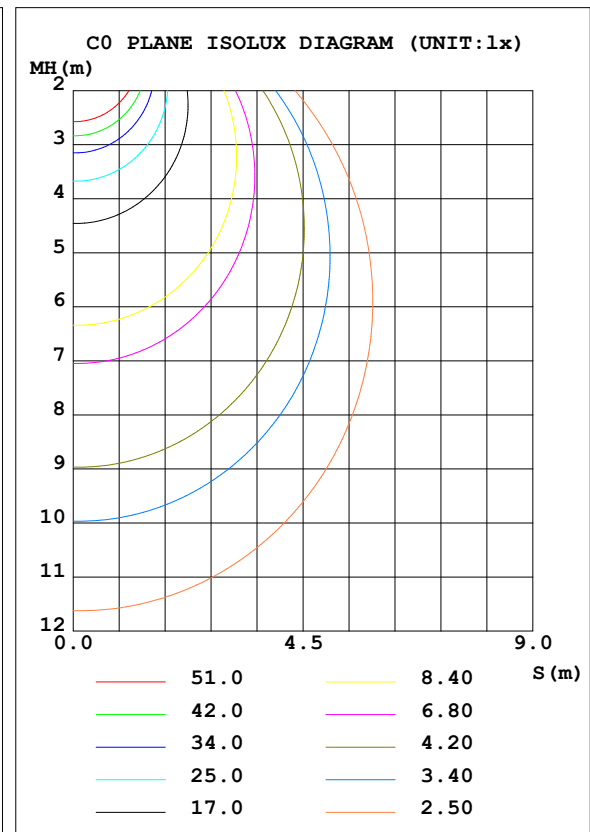


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.001V I:0.4809A P:11.542W PF:1.0000 Freq:0Hz Lamp Flux:1025.87x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 11.5W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

DATA OF LAMP		PHOTOMETRIC DATA Eff: 88.88 lm/W			
MODEL		I <sub>max</sub> (cd)	338.6	S/MH (C0/180)	1.26
NOMINAL POWER (W)		LOR (%)	100.0	S/MH (C90/270)	1.33
RATED VOLTAGE (V)		TOTAL FLUX (lm)	1025.9	η UP, DN (C0-180)	0.3, 47.9
NOMINAL FLUX (lm)	1025.87	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 51.0
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)		η down (%)	99.0	CIBSE SHR MAX	1.35

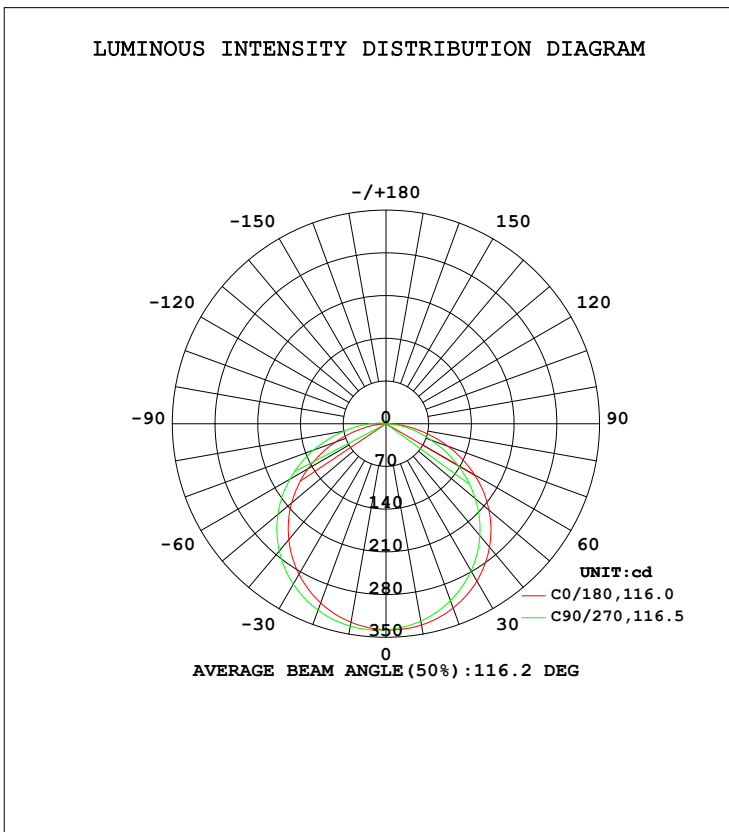

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**
**ZONAL FLUX DIAGRAM:**


$\gamma$	C0	C90	C180	C270				$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	334.9	328.4	330.3	336.8				0- 10	31.99	31.99	3.12,3.12
20	321.5	308.5	312.7	325.3				10- 20	92.08	124.1	12.1,12.1
30	297.8	278.7	285.0	303.7				20- 30	140.8	264.8	25.8,25.8
40	263.9	239.3	247.9	272.2				30- 40	171.9	436.7	42.6,42.6
50	220.3	190.9	201.8	231.3				40- 50	180.9	617.6	60.2,60.2
60	167.7	135.7	147.8	182.1				50- 60	165.8	783.4	76.4,76.4
70	108.1	78.91	88.58	126.4				60- 70	128.3	911.7	88.9,88.9
80	48.44	32.45	32.86	69.74				70- 80	76.40	988.1	96.3,96.3
90	4.542	6.371	0.3572	25.53				80- 90	27.44	1016	99,99
100	0.3326	1.021	0.5300	6.034				90-100	5.115	1021	99.5,99.5
110	0.5170	0.7144	0.7517	0.5298				100-110	0.9454	1022	99.6,99.6
120	0.6896	0.8991	0.9976	0.6155				110-120	0.6971	1022	99.6,99.6
130	0.9236	1.084	1.170	0.8248				120-130	0.8014	1023	99.7,99.7
140	1.083	1.232	1.343	0.9975				130-140	0.8394	1024	99.8,99.8
150	1.195	1.392	1.454	1.158				140-150	0.7768	1025	99.9,99.9
160	1.360	1.495	1.554	1.330				150-160	0.6395	1025	99.9,99.9
170	1.434	1.565	1.548	1.453				160-170	0.4159	1026	100,100
180	1.527	1.576	1.540	1.527				170-180	0.1446	1026	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.001V I:0.4809A P:11.542W PF:1.0000 Freq:0Hz Lamp Flux:1025.87x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 11.5W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

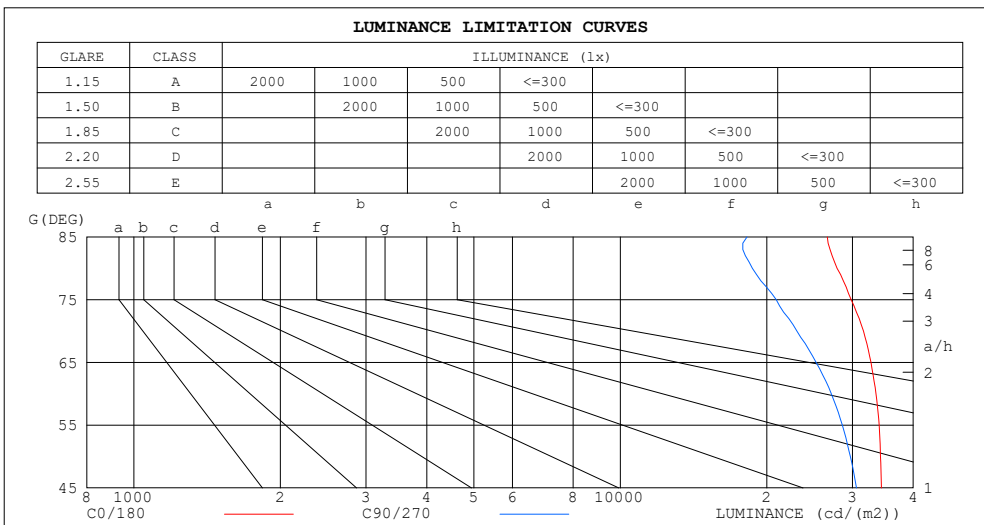

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	26633	18216
80	27895	18685
75	29832	20920
70	31603	23073
65	32761	25271
60	33534	27144
55	34040	28602
50	34268	29703
45	34401	30575


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:24.001V I:0.4809A P:11.542W PF:1.0000 Freq:0Hz Lamp Flux:1025.87x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 11.5W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.89	.82	.76	.87	.81	.75	.84	.78	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.78	.70	.63	.77	.69	.63	.73	.67	.61	.71	.65	.60	.68	.63	.59	.57
4.0	.69	.60	.53	.68	.59	.53	.65	.58	.52	.63	.56	.51	.60	.55	.50	.48
5.0	.62	.53	.46	.60	.52	.45	.58	.51	.45	.56	.49	.44	.54	.48	.44	.41
6.0	.55	.46	.40	.54	.46	.40	.53	.45	.39	.51	.44	.39	.49	.43	.38	.36
7.0	.50	.41	.35	.49	.41	.35	.48	.40	.35	.46	.39	.34	.45	.39	.34	.32
8.0	.46	.37	.31	.45	.37	.31	.44	.36	.31	.42	.35	.31	.41	.35	.30	.28
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.27	.38	.32	.27	.25
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

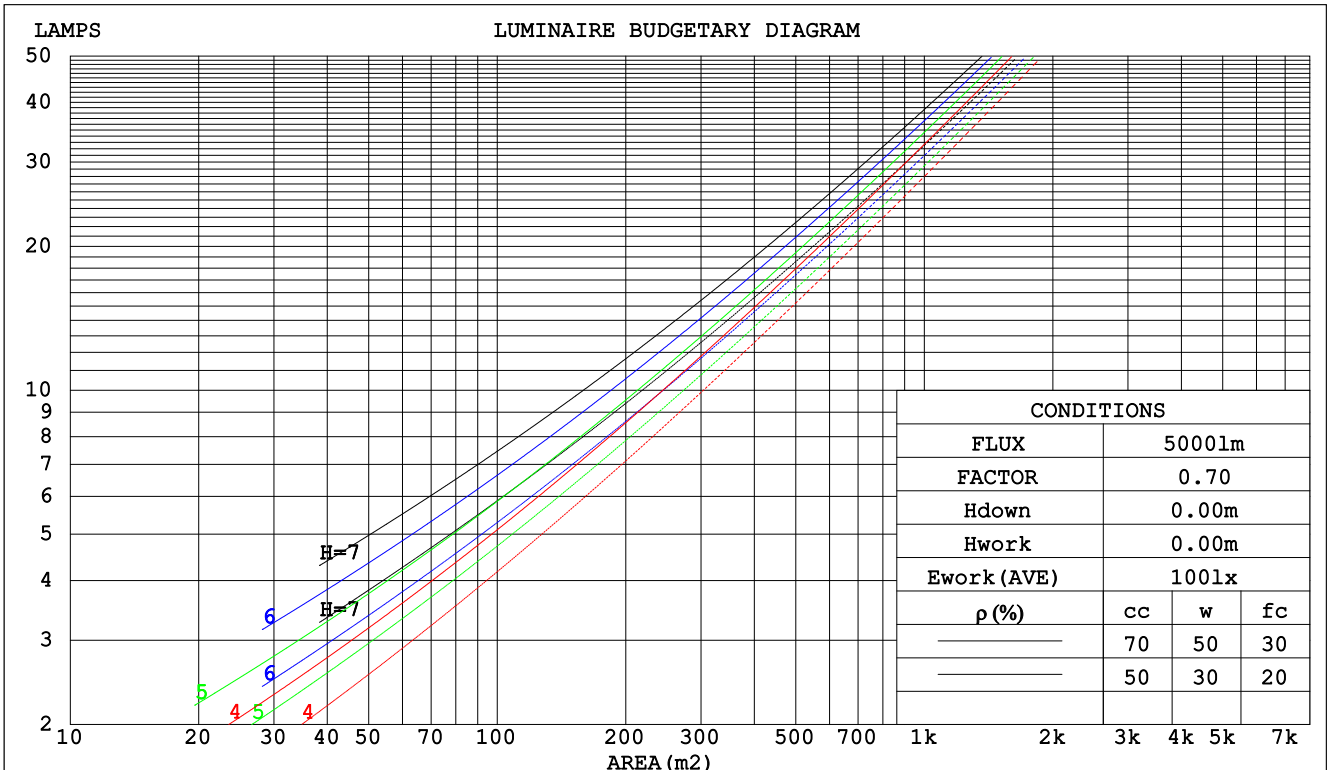

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:24.001V I:0.4809A P:11.542W PF:1.0000 Freq:0Hz Lamp Flux:1025.87x1 lm								
NAME: UB-AT1-DYN276295C			TYPE: LED Strip			WEIGHT:		
SPEC.: 11.5W			DIM.: 1000*10*2 (MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.			SUR.: 0.01*1			Shielding Angle: 120		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.322	.183	.058	.314	.179	.057	.300	.172	.055	.288	.166	.053	.276	.160	.052	
2.0	.299	.164	.050	.293	.161	.050	.280	.156	.048	.269	.151	.047	.259	.146	.046	
3.0	.275	.147	.044	.270	.144	.043	.259	.140	.043	.248	.136	.042	.239	.132	.041	
4.0	.253	.132	.039	.248	.130	.038	.238	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.233	.119	.034	.229	.118	.034	.220	.115	.034	.212	.112	.033	.205	.109	.033	
6.0	.216	.108	.031	.212	.107	.031	.204	.105	.030	.197	.102	.030	.190	.100	.030	
7.0	.201	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.092	.027	
8.0	.187	.092	.026	.184	.091	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.157	.080	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.022	.148	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.116	.116	.116	.066	.066	.066	.021	.021	.021	
1.0	.189	.164	.141	.162	.141	.122	.111	.097	.084	.064	.056	.049	.020	.018	.016	
2.0	.181	.140	.105	.155	.120	.091	.106	.083	.063	.061	.048	.037	.020	.016	.012	
3.0	.173	.122	.081	.149	.105	.071	.102	.073	.050	.059	.043	.029	.019	.014	.010	
4.0	.166	.109	.066	.142	.094	.057	.098	.066	.040	.057	.038	.024	.018	.013	.008	
5.0	.158	.099	.055	.136	.085	.048	.094	.060	.034	.054	.035	.020	.017	.011	.007	
6.0	.151	.090	.047	.130	.078	.041	.090	.055	.029	.052	.032	.017	.017	.011	.006	
7.0	.144	.083	.041	.124	.072	.036	.086	.051	.025	.050	.030	.015	.016	.010	.005	
8.0	.138	.078	.036	.118	.067	.032	.082	.047	.023	.048	.028	.013	.015	.009	.004	
9.0	.131	.073	.033	.113	.063	.029	.078	.044	.020	.046	.026	.012	.015	.009	.004	
10.0	.126	.068	.030	.108	.059	.026	.075	.042	.019	.044	.025	.011	.014	.008	.004	

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:24.001V I:0.4809A P:11.542W PF:1.0000 Freq:0Hz Lamp Flux:1025.87x1 lm										
NAME: UB-AT1-DYN276295C				TYPE: LED Strip			WEIGHT:			
SPEC.: 11.5W				DIM.: 1000*10*2 (MM)			SERIAL No.: 001			
MFR.: Flexfire LEDs, Inc.				SUR.: 0.01*1			Shielding Angle: 120			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.0	26.5	25.2	26.7	26.9	24.2	25.7	24.5	26.0	26.2
3H	26.6	28.0	26.9	28.3	28.5	25.5	27.0	25.9	27.2	27.5
4H	27.3	28.6	27.6	28.9	29.2	26.0	27.4	26.4	27.7	27.9
6H	27.8	29.0	28.1	29.3	29.6	26.4	27.7	26.7	27.9	28.3
8H	27.9	29.2	28.3	29.5	29.8	26.5	27.7	26.9	28.0	28.3
12H	28.1	29.3	28.4	29.6	29.9	26.6	27.8	26.9	28.1	28.4
4H 2H	25.5	26.8	25.8	27.1	27.4	24.9	26.2	25.2	26.5	26.8
3H	27.3	28.5	27.7	28.8	29.1	26.4	27.6	26.8	27.9	28.2
4H	28.1	29.2	28.5	29.5	29.9	27.0	28.1	27.4	28.5	28.8
6H	28.7	29.7	29.1	30.1	30.4	27.5	28.5	27.9	28.8	29.2
8H	29.0	29.9	29.4	30.3	30.7	27.7	28.6	28.1	29.0	29.4
12H	29.2	30.0	29.6	30.4	30.8	27.8	28.6	28.2	29.0	29.5
8H 4H	28.3	29.2	28.7	29.6	30.0	27.4	28.3	27.8	28.6	29.1
6H	29.1	29.8	29.5	30.3	30.7	28.0	28.7	28.5	29.2	29.6
8H	29.4	30.1	29.9	30.5	31.0	28.3	28.9	28.7	29.4	29.8
12H	29.7	30.3	30.2	30.7	31.2	28.5	29.0	29.0	29.5	30.0
12H 4H	28.3	29.1	28.7	29.5	29.9	27.4	28.2	27.8	28.6	29.1
6H	29.1	29.8	29.6	30.2	30.7	28.1	28.7	28.6	29.2	29.7
8H	29.5	30.1	30.0	30.6	31.1	28.4	29.0	28.9	29.4	29.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 1026 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.1)  
 Area: 0.01 m2

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:24.001V I:0.4809A P:11.542W PF:1.0000 Freq:0Hz Lamp Flux:1025.87x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 11.5W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	45	37	56	44	37	54	44	37	31
0.80	66	54	47	65	54	47	63	53	46	39
1.00	75	63	56	73	63	56	71	64	55	48
1.25	82	71	64	80	70	63	77	69	62	55
1.50	87	77	69	85	76	69	82	74	68	60
2.00	94	85	78	92	84	77	88	81	76	68
2.50	98	90	83	96	88	82	92	86	81	72
3.00	101	94	88	99	92	87	95	89	85	76
4.00	105	99	94	103	98	93	98	94	90	81
5.00	108	103	98	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:24.001V I:0.4809A P:11.542W PF:1.0000 Freq:0Hz Lamp Flux:1025.87x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 11.5W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

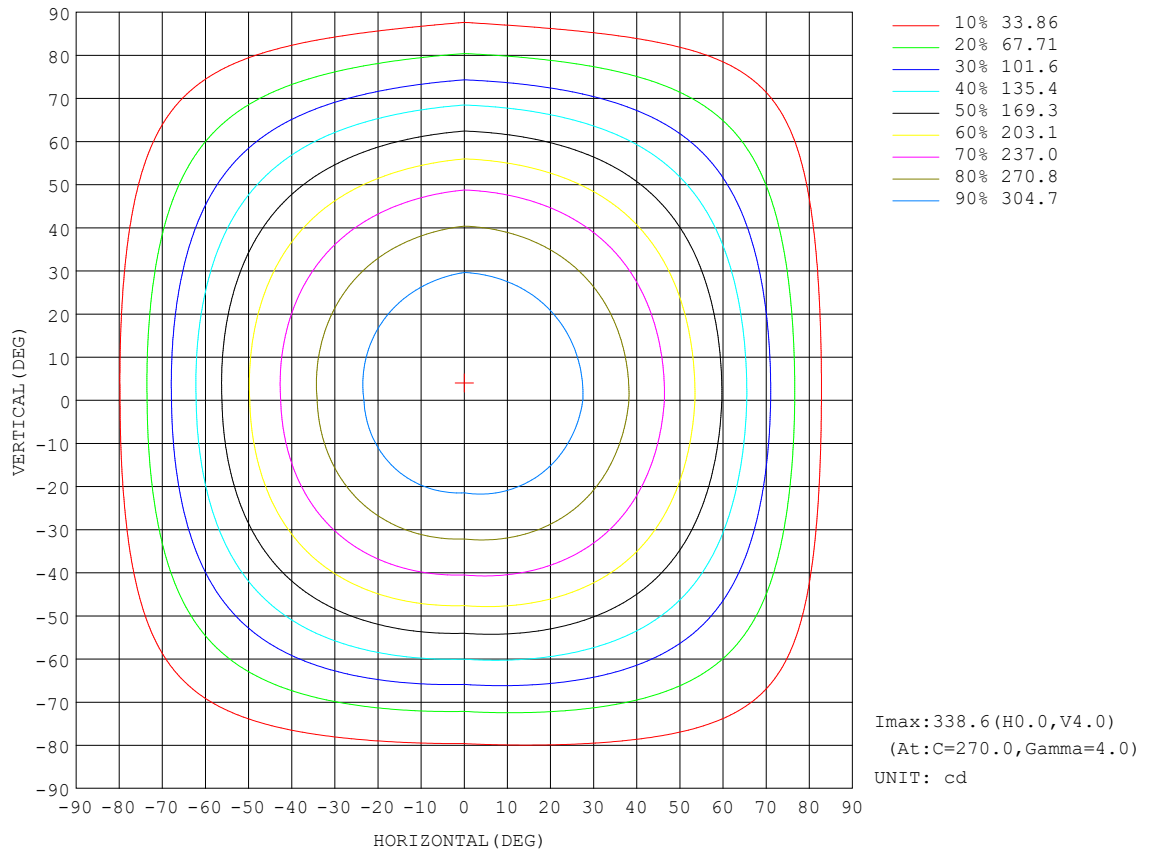

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2023-05-21


γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:24.001V I:0.4809A P:11.542W PF:1.0000 Freq:0Hz Lamp Flux:1025.87x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 11.5W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

Flux out:752.6 lm

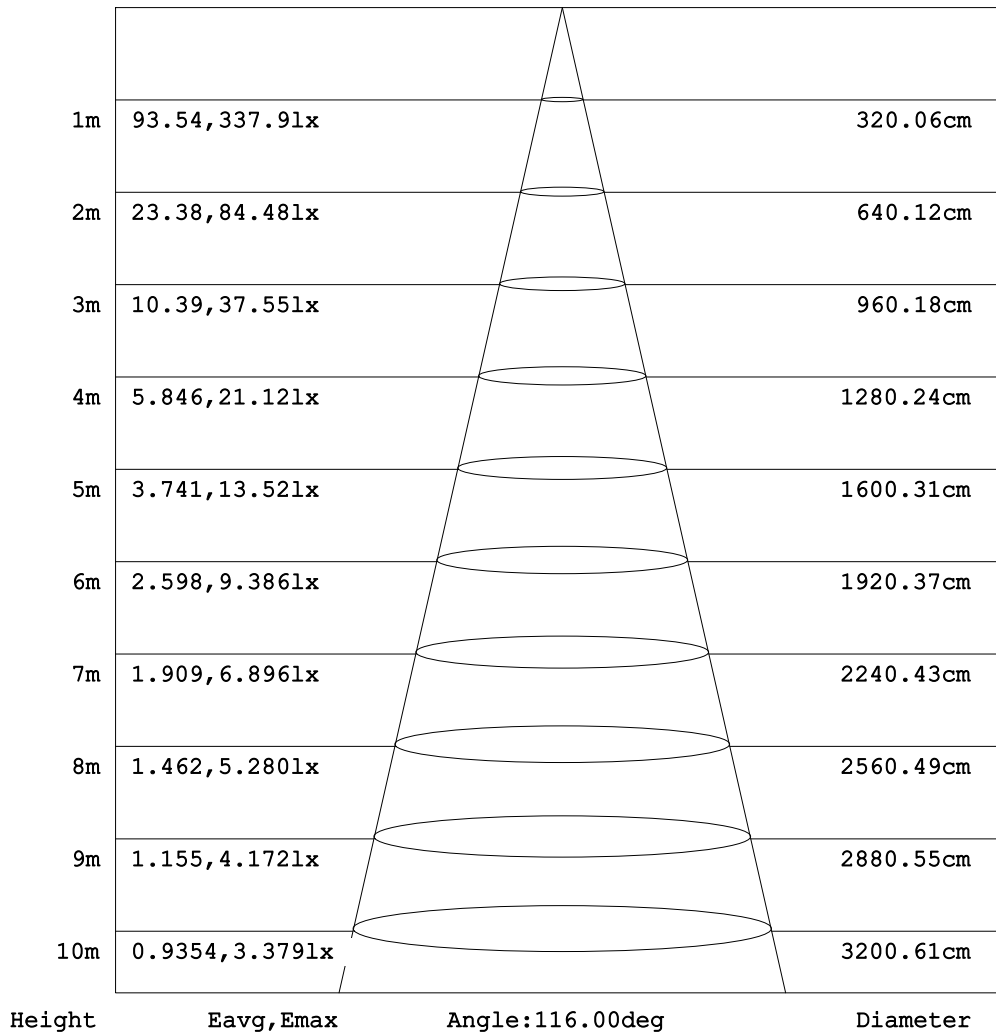


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM

Test:U:24.001V I:0.4809A P:11.542W PF:1.0000 Freq:0Hz Lamp Flux:1025.87x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 11.5W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

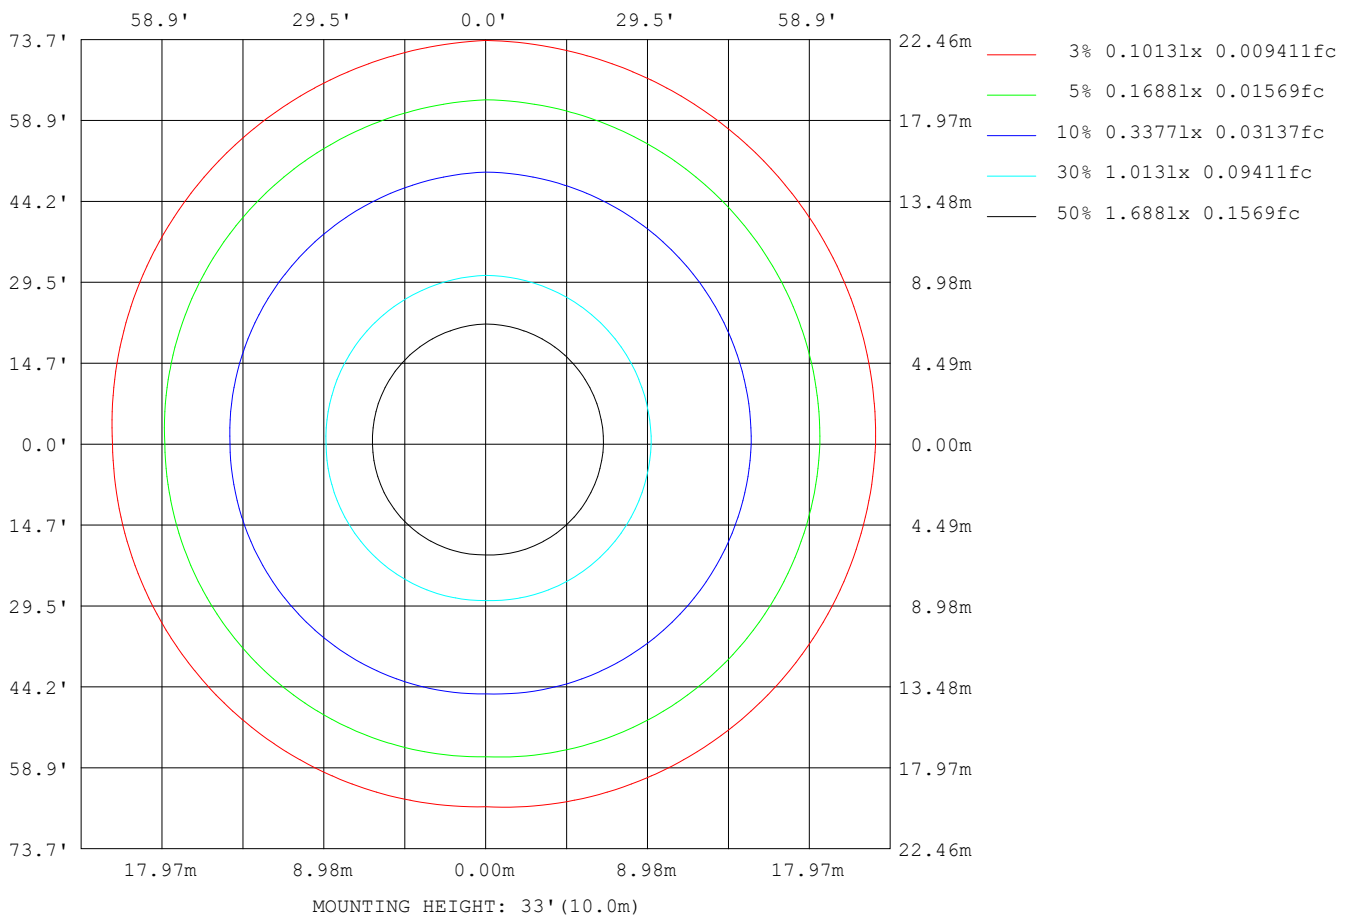

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:24.001V I:0.4809A P:11.542W PF:1.0000 Freq:0Hz Lamp Flux:1025.87x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 11.5W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120


AvgL	cd/m2
L_0~180 (65) av	30419
L_0~180 (75) av	26364
L_0~180 (85) av	20098
L_90~270 (65) av	30968
L_90~270 (75) av	29291
L_90~270 (85) av	34832
L_45 (65) av	30615
L_45 (75) av	27976
L_45 (85) av	28898

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

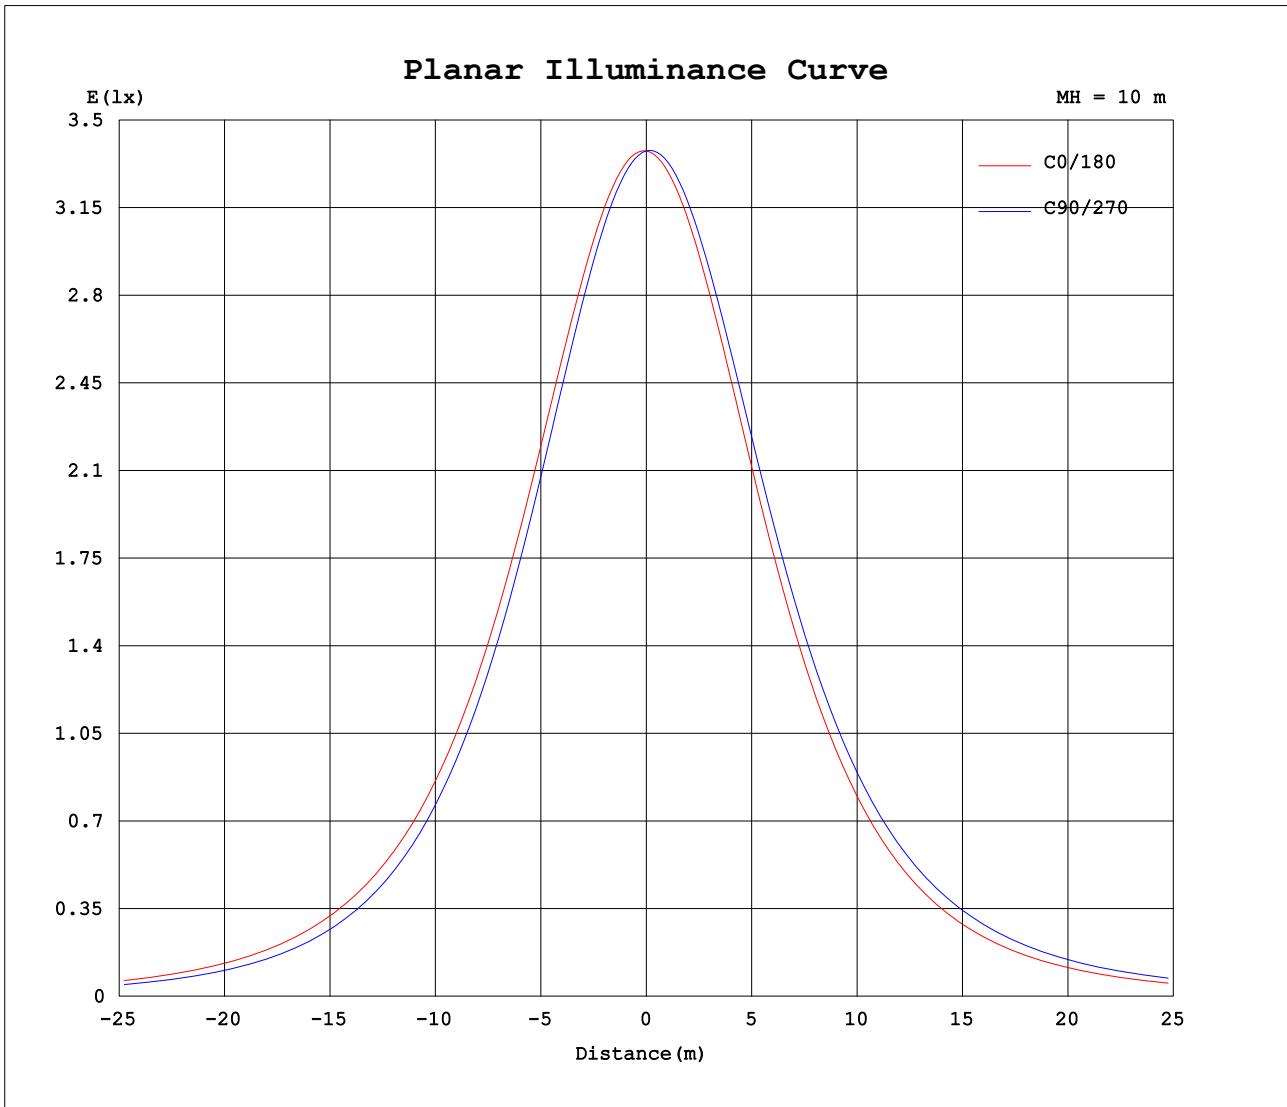

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2023-05-21

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.001V I:0.4809A P:11.542W PF:1.0000 Freq:0Hz Lamp Flux:1025.87x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 11.5W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	338	338	338	338															
5	338	334	335	339															
10	335	328	330	337															
15	329	320	323	332															
20	321	308	313	325															
25	311	295	300	316															
30	298	279	285	304															
35	282	260	268	289															
40	264	239	248	272															
45	243	216	226	253															
50	220	191	202	231															
55	195	164	176	208															
60	168	136	148	182															
65	138	107	119	155															
70	108	78.9	88.6	126															
75	77.2	54.1	59.3	97.5															
80	48.4	32.4	32.9	69.7															
85	23.2	15.9	11.8	44.8															
90	4.54	6.37	0.36	25.5															
95	0.33	3.03	0.47	13.7															
100	0.33	1.02	0.53	6.03															
105	0.38	0.62	0.64	0.89															
110	0.52	0.71	0.75	0.53															
115	0.58	0.79	0.89	0.56															
120	0.69	0.90	1.00	0.62															
125	0.78	0.99	1.08	0.74															
130	0.92	1.08	1.17	0.82															
135	0.96	1.17	1.26	0.97															
140	1.08	1.23	1.34	1.00															
145	1.13	1.31	1.42	1.11															
150	1.19	1.39	1.45	1.16															
155	1.34	1.45	1.52	1.29															
160	1.36	1.49	1.55	1.33															
165	1.39	1.55	1.56	1.39															
170	1.43	1.57	1.55	1.45															
175	1.48	1.57	1.54	1.50															
180	1.53	1.58	1.54	1.53															

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks: