
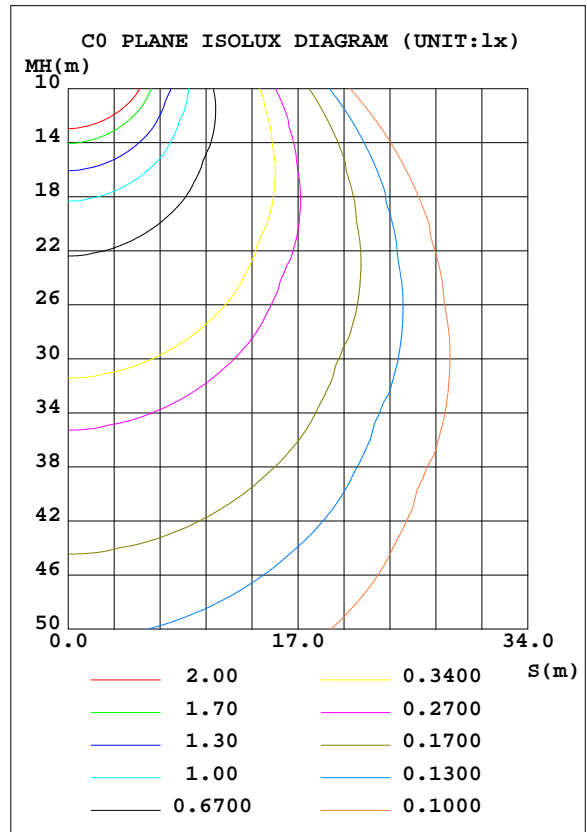


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:23.95V I:0.4304A P:10.31W PF:1.000 Lamp Flux:1020.83x1 lm		
NAME: UB-SNA-DW183090C (3000K)	TYPE: LED Strip	WEIGHT: 0.01 Kg
SPEC.: 11W	DIM.:1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10 (MM)	Shielding Angle:120

DATA OF LAMP		PHOTOMETRIC DATA Eff: 99.05 lm/W			
MODEL		I _{max} (cd)	333.9	S/MH(C0/180)	1.31
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.30
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1020.8	η UP, DN(C0-180)	0.3,48.5
NOMINAL FLUX(lm)	1020.83	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.4,50.8
LAMPS INSIDE	1	η up(%)	0.7	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	23.95	η down(%)	99.3	CIBSE SHR MAX	1.50

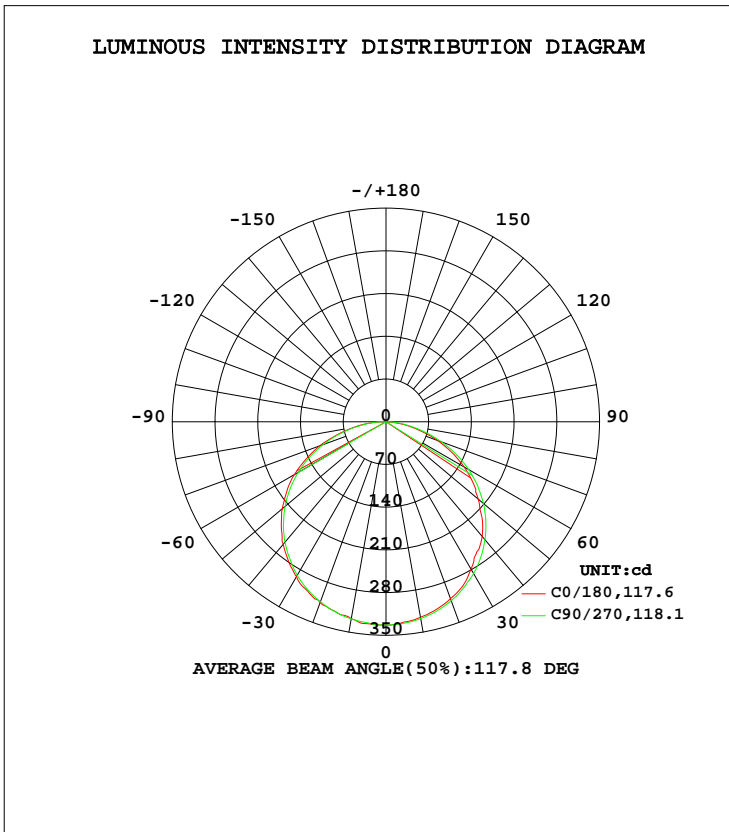

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-11-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	325.5	325.9	327.5	329.7	327.7	330.1	327.8	326.8	0- 10	31.55	31.55	3.09,3.09
20	308.7	309.1	312.3	316.0	315.5	317.3	314.1	310.6	10- 20	90.85	122.4	12,12
30	278.9	282.6	287.1	292.7	293.3	295.1	290.7	285.3	20- 30	139.3	261.7	25.6,25.6
40	245.2	246.7	252.1	259.9	261.9	263.2	257.5	250.9	30- 40	170.7	432.4	42.4,42.4
50	197.4	201.8	208.5	217.7	221.9	222.6	215.8	207.5	40- 50	180.9	613.3	60.1,60.1
60	147.6	148.8	156.3	166.7	173.4	173.6	166.2	156.7	50- 60	167.6	780.9	76.5,76.5
70	89.68	89.42	97.21	108.5	115.5	117.3	109.7	99.41	60- 70	131.3	912.2	89.4,89.4
80	33.09	32.31	38.91	47.77	53.78	56.37	50.63	41.05	70- 80	77.28	989.5	96.9,96.9
90	1.079	2.494	4.178	6.550	6.844	10.29	8.618	4.870	80- 90	24.07	1014	99.3,99.3
100	0.4819	0.7315	0.5923	0.6371	0.4668	0.5177	0.5467	0.5311	90-100	1.913	1015	99.5,99.5
110	0.7377	0.7767	0.7134	0.6519	0.6780	0.6404	0.6989	0.7436	100-110	0.6474	1016	99.5,99.5
120	0.9336	0.9444	0.8805	0.8493	0.9338	0.8991	0.9112	0.9559	110-120	0.8045	1017	99.6,99.6
130	1.189	1.112	1.048	1.046	1.115	1.067	1.093	1.138	120-130	0.9044	1018	99.7,99.7
140	1.250	1.249	1.215	1.198	1.295	1.234	1.275	1.320	130-140	0.9147	1019	99.8,99.8
150	1.431	1.417	1.366	1.305	1.400	1.371	1.382	1.396	140-150	0.8285	1020	99.9,99.9
160	1.461	1.478	1.473	1.441	1.476	1.508	1.504	1.547	150-160	0.6686	1020	99.9,99.9
170	1.551	1.600	1.686	1.592	1.627	1.615	1.625	1.623	160-170	0.4400	1021	100,100
180	1.581	1.676	1.716	1.623	1.656	1.691	1.701	1.653	170-180	0.1557	1021	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 523.05 lm

%lum = 51.2%
%lamp = 51.2%

Conical surface Flux(120deg): 780.87 lm


%lum = 76.5%
%lamp = 76.5%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2020-11-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:9.660m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:23.95V I:0.4304A P:10.31W PF:1.000 Lamp Flux:1020.83x1 lm		
NAME: UB-SNA-DW183090C (3000K)	TYPE:LED Strip	WEIGHT: 0.01 Kg
SPEC.: 11W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10 (MM)	Shielding Angle:120

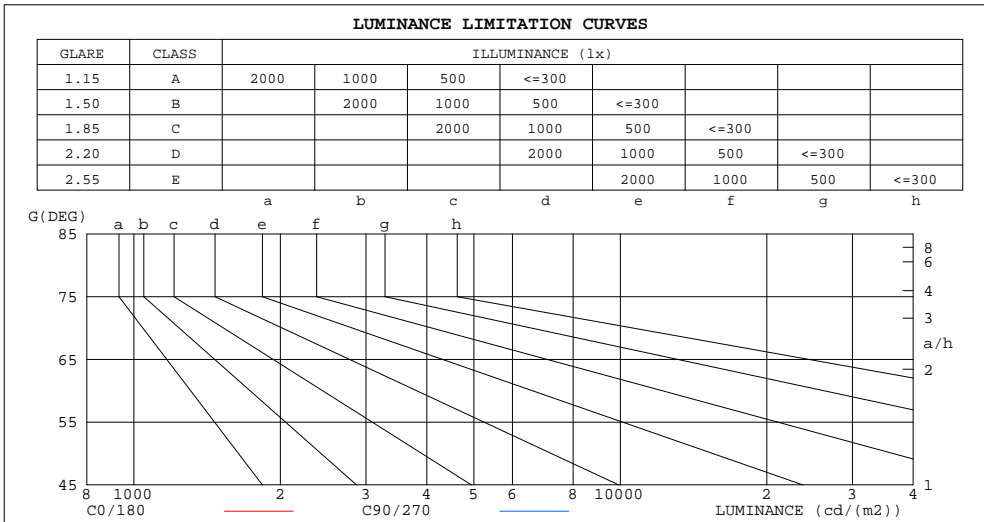

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6707380	9679102
80	9608377	11200486
75	11711899	12944194
70	13218964	14209128
65	14223218	15042545
60	14887444	15628542
55	15316974	15995631
50	15480103	16214452
45	15868851	16358969


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-11-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:23.95V I:0.4304A P:10.31W PF:1.000 Lamp Flux:1020.83x1 lm		
NAME: UB-SNA-DW183090C (3000K)	TYPE:LED Strip	WEIGHT: 0.01 Kg
SPEC.: 11W	DIM.:1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10 (MM)	Shielding Angle:120

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.90	.87	.89	.86	.84	.82
2.0	.89	.82	.77	.88	.81	.76	.84	.78	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.78	.70	.63	.77	.69	.63	.74	.67	.61	.71	.65	.60	.68	.63	.59	.57
4.0	.69	.60	.53	.68	.59	.53	.65	.58	.52	.63	.56	.51	.60	.55	.50	.48
5.0	.62	.52	.46	.60	.52	.45	.58	.51	.45	.56	.49	.44	.54	.48	.44	.41
6.0	.55	.46	.40	.54	.46	.39	.52	.45	.39	.51	.44	.39	.49	.43	.38	.36
7.0	.50	.41	.35	.49	.41	.35	.48	.40	.34	.46	.39	.34	.45	.39	.34	.32
8.0	.46	.37	.31	.45	.37	.31	.44	.36	.31	.42	.35	.30	.41	.35	.30	.28
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.27	.38	.32	.27	.25
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.35	.29	.25	.23

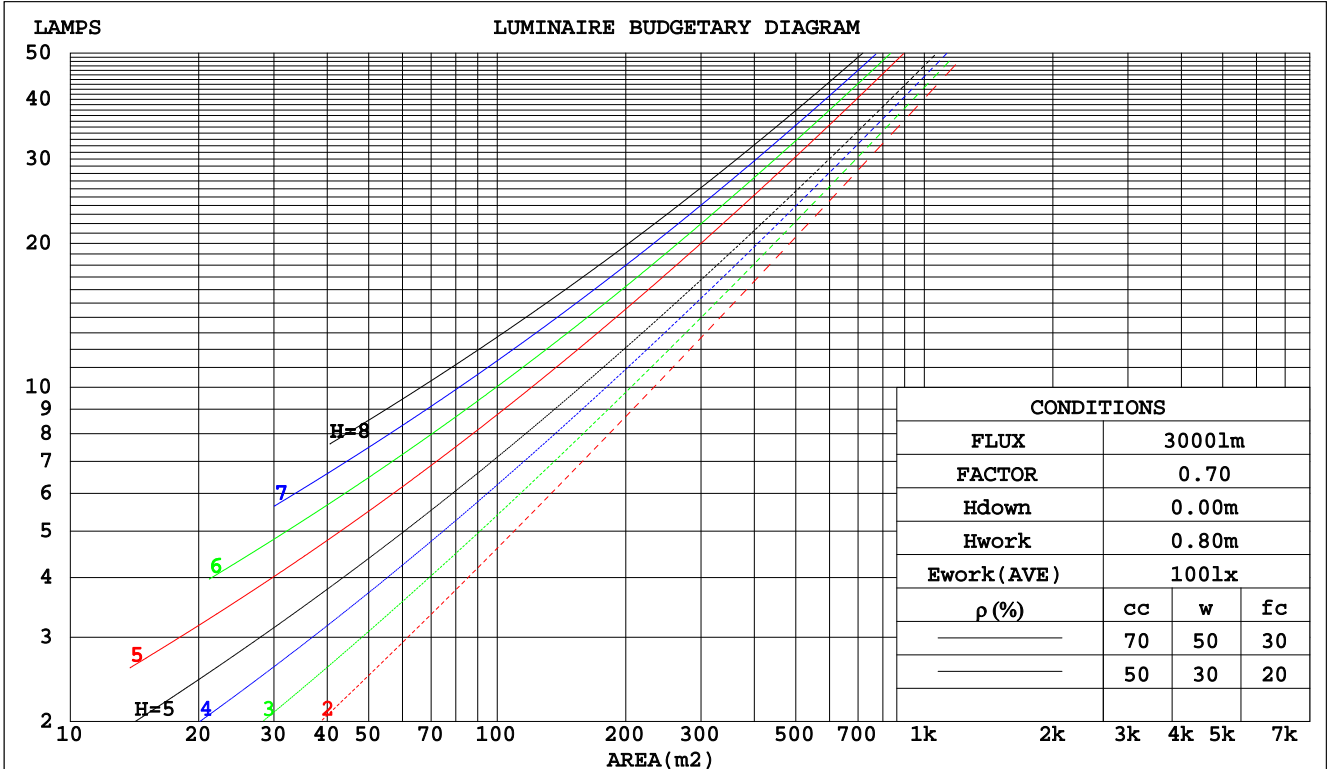

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-11-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:23.95V I:0.4304A P:10.31W PF:1.000 Lamp Flux:1020.83x1 lm		
NAME: UB-SNA-DW183090C (3000K)	TYPE:LED Strip	WEIGHT: 0.01 Kg
SPEC.: 11W	DIM.:1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10 (MM)	Shielding Angle:120

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.320	.182	.058	.313	.178	.057	.299	.172	.055	.287	.165	.053	.275	.159	.051	
2.0	.299	.164	.050	.293	.161	.050	.281	.156	.048	.269	.151	.047	.259	.147	.046	
3.0	.276	.147	.044	.270	.145	.044	.259	.141	.043	.249	.137	.042	.240	.133	.041	
4.0	.254	.132	.039	.249	.130	.038	.239	.127	.038	.230	.124	.037	.222	.121	.037	
5.0	.234	.119	.035	.230	.118	.034	.221	.115	.034	.213	.112	.033	.206	.110	.033	
6.0	.217	.109	.031	.213	.107	.031	.205	.105	.031	.198	.103	.030	.191	.101	.030	
7.0	.201	.100	.028	.198	.099	.028	.191	.097	.028	.185	.095	.028	.179	.093	.027	
8.0	.188	.092	.026	.185	.091	.026	.179	.089	.025	.173	.088	.025	.167	.086	.025	
9.0	.176	.085	.024	.173	.084	.024	.167	.083	.023	.162	.081	.023	.157	.080	.023	
10.0	.165	.079	.022	.163	.079	.022	.158	.077	.022	.153	.076	.022	.149	.075	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.196	.196	.196	.167	.167	.167	.114	.114	.114	.066	.066	.066	.021	.021	.021	
1.0	.187	.162	.139	.160	.139	.120	.109	.095	.083	.063	.055	.048	.020	.018	.016	
2.0	.179	.137	.103	.153	.118	.089	.105	.082	.062	.060	.048	.036	.019	.015	.012	
3.0	.171	.120	.079	.147	.103	.069	.101	.072	.048	.058	.042	.028	.019	.014	.009	
4.0	.164	.107	.063	.140	.092	.055	.097	.064	.039	.056	.038	.023	.018	.012	.008	
5.0	.156	.096	.052	.134	.083	.045	.092	.058	.032	.053	.034	.019	.017	.011	.006	
6.0	.149	.088	.044	.128	.076	.039	.088	.053	.027	.051	.031	.016	.017	.010	.005	
7.0	.142	.081	.038	.122	.070	.034	.084	.049	.024	.049	.029	.014	.016	.010	.005	
8.0	.135	.075	.034	.117	.065	.030	.081	.046	.021	.047	.027	.013	.015	.009	.004	
9.0	.129	.070	.031	.111	.061	.027	.077	.043	.019	.045	.025	.011	.015	.008	.004	
10.0	.124	.066	.028	.107	.057	.024	.074	.040	.017	.043	.024	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-11-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:23.95V I:0.4304A P:10.31W PF:1.000 Lamp Flux:1020.83x1 lm										
NAME: UB-SNA-DW183090C (3000K)					TYPE:LED Strip			WEIGHT: 0.01 Kg		
SPEC.: 11W					DIM.:1000*10*2 (MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.					SUR.:1000*10 (MM)			Shielding Angle:120		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	46.1	47.6	46.4	47.9	48.1	46.3	47.8	46.6	48.1	48.3
3H	47.6	49.0	47.9	49.2	49.5	47.8	49.3	48.1	49.5	49.8
4H	48.1	49.5	48.4	49.7	50.0	48.4	49.8	48.7	50.0	50.3
6H	48.4	49.7	48.8	50.0	50.3	48.8	50.1	49.2	50.4	50.7
8H	48.5	49.8	48.9	50.0	50.4	48.9	50.2	49.3	50.5	50.8
12H	48.5	49.7	48.9	50.0	50.4	49.0	50.2	49.4	50.5	50.8
4H 2H	46.7	48.1	47.0	48.3	48.6	46.9	48.2	47.2	48.5	48.8
3H	48.3	49.5	48.7	49.8	50.2	48.6	49.7	48.9	50.0	50.4
4H	49.0	50.1	49.4	50.4	50.7	49.2	50.3	49.6	50.7	51.0
6H	49.4	50.4	49.8	50.7	51.1	49.8	50.7	50.2	51.1	51.5
8H	49.5	50.4	50.0	50.8	51.2	49.9	50.8	50.3	51.2	51.6
12H	49.6	50.4	50.0	50.8	51.2	50.0	50.9	50.5	51.3	51.7
8H 4H	49.2	50.1	49.6	50.5	50.9	49.4	50.3	49.9	50.7	51.1
6H	49.7	50.5	50.2	50.9	51.4	50.1	50.8	50.5	51.2	51.7
8H	49.9	50.6	50.4	51.0	51.5	50.3	51.0	50.8	51.4	51.9
12H	50.0	50.6	50.5	51.1	51.6	50.5	51.0	51.0	51.5	52.0
12H 4H	49.2	50.0	49.6	50.4	50.8	49.4	50.3	49.9	50.7	51.1
6H	49.8	50.4	50.3	50.9	51.4	50.1	50.8	50.6	51.2	51.7
8H	50.0	50.6	50.5	51.0	51.5	50.4	50.9	50.8	51.4	51.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 1021 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.1)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-11-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:23.95V I:0.4304A P:10.31W PF:1.000 Lamp Flux:1020.83x1 lm		
NAME: UB-SNA-DW183090C (3000K)	TYPE:LED Strip	WEIGHT: 0.01 Kg
SPEC.: 11W	DIM.:1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10 (MM)	Shielding Angle:120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	44	37	30
0.80	66	54	47	65	54	47	63	53	46	39
1.00	75	63	56	73	63	55	71	64	55	48
1.25	82	71	64	80	70	63	78	69	62	55
1.50	87	77	69	85	76	69	82	74	68	60
2.00	94	85	78	92	84	78	88	81	76	68
2.50	98	90	84	96	88	83	92	86	81	72
3.00	101	94	89	99	93	87	95	90	85	76
4.00	106	100	95	103	98	93	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-11-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:23.95V I:0.4304A P:10.31W PF:1.000 Lamp Flux:1020.83x1 lm		
NAME: UB-SNA-DW183090C (3000K)	TYPE:LED Strip	WEIGHT: 0.01 Kg
SPEC.: 11W	DIM.:1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10 (MM)	Shielding Angle:120

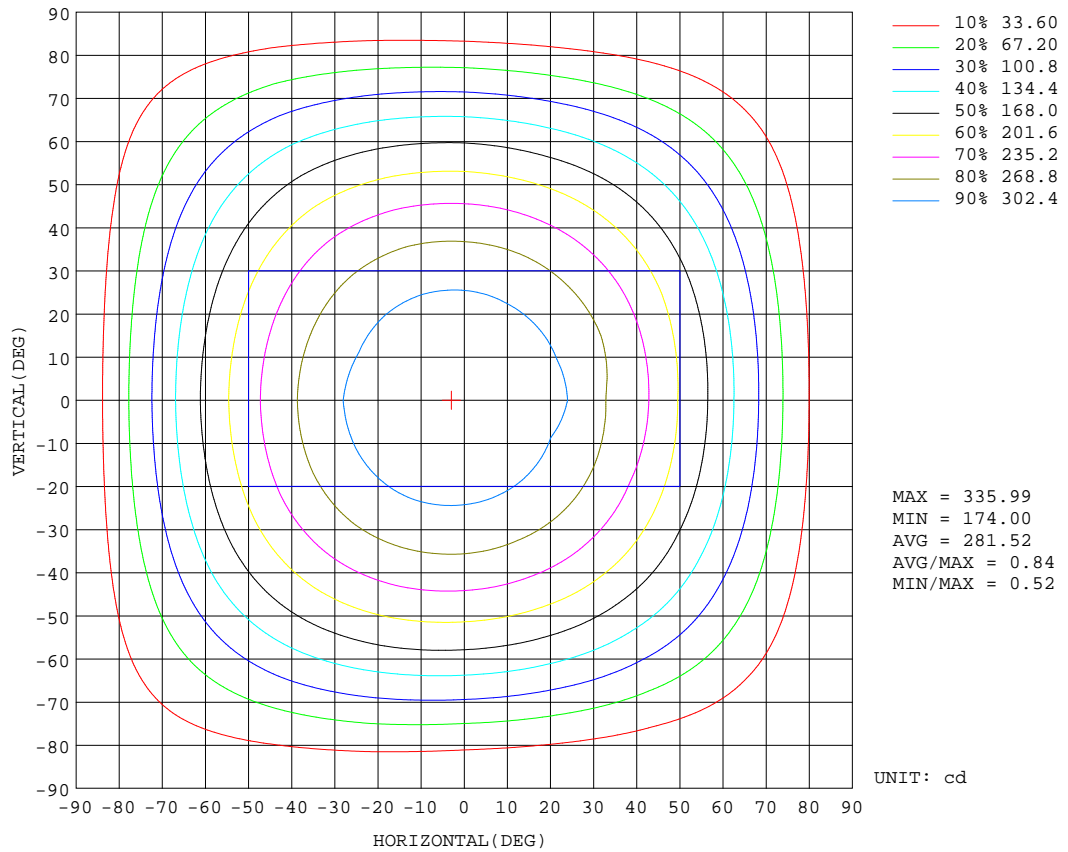


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-11-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

AAI Figure

Test:U:23.95V I:0.4304A P:10.31W PF:1.000 Lamp Flux:1020.83x1 lm		
NAME: UB-SNA-DW183090C (3000K)	TYPE:LED Strip	WEIGHT: 0.01 Kg
SPEC.: 11W	DIM.:1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10 (MM)	Shielding Angle:120

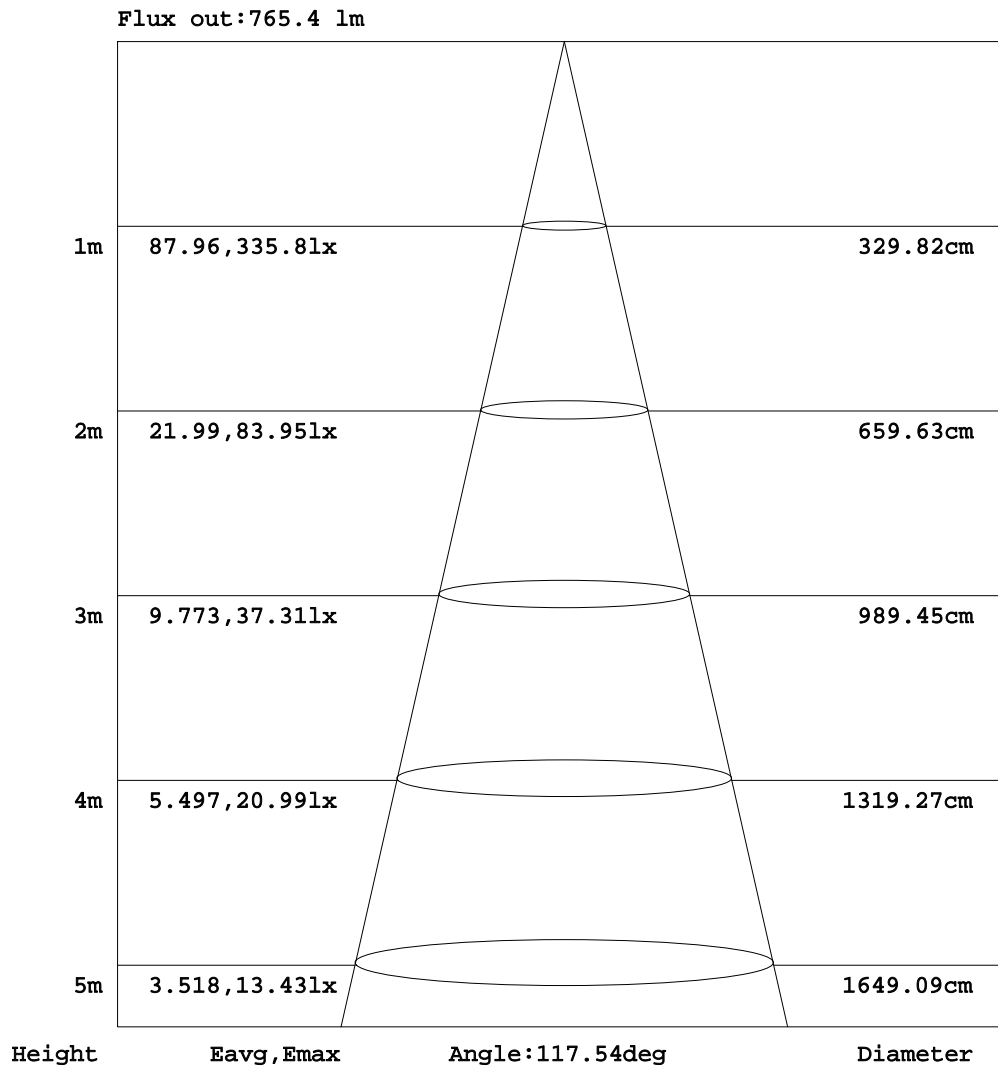


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-11-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:23.95V I:0.4304A P:10.31W PF:1.000 Lamp Flux:1020.83x1 lm		
NAME: UB-SNA-DW183090C (3000K)	TYPE:LED Strip	WEIGHT: 0.01 Kg
SPEC.: 11W	DIM.:1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10 (MM)	Shielding Angle:120

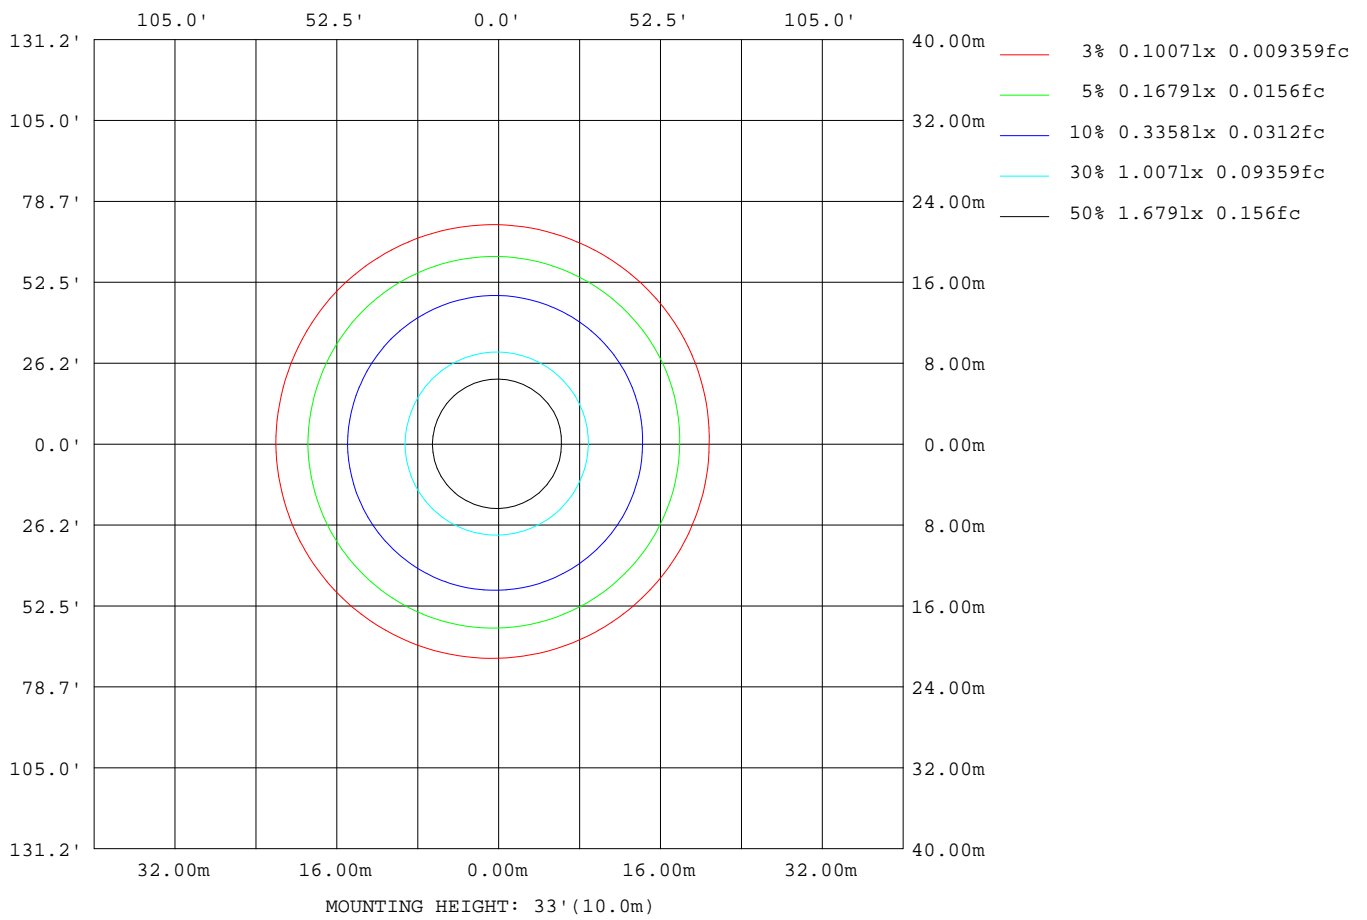

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-11-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:23.95V I:0.4304A P:10.31W PF:1.000 Lamp Flux:1020.83x1 lm		
NAME: UB-SNA-DW183090C (3000K)	TYPE:LED Strip	WEIGHT: 0.01 Kg
SPEC.: 11W	DIM.:1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10 (MM)	Shielding Angle:120


AvgL	cd/m2
L_0~180(65)av	15608079
L_0~180(75)av	13861516
L_0~180(85)av	11251911
L_90~270(65)av	15726388
L_90~270(75)av	14159940
L_90~270(85)av	12147785
L_45(65)av	15751449
L_45(75)av	14139138
L_45(85)av	11879682

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-11-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

Planar Illuminance Curve

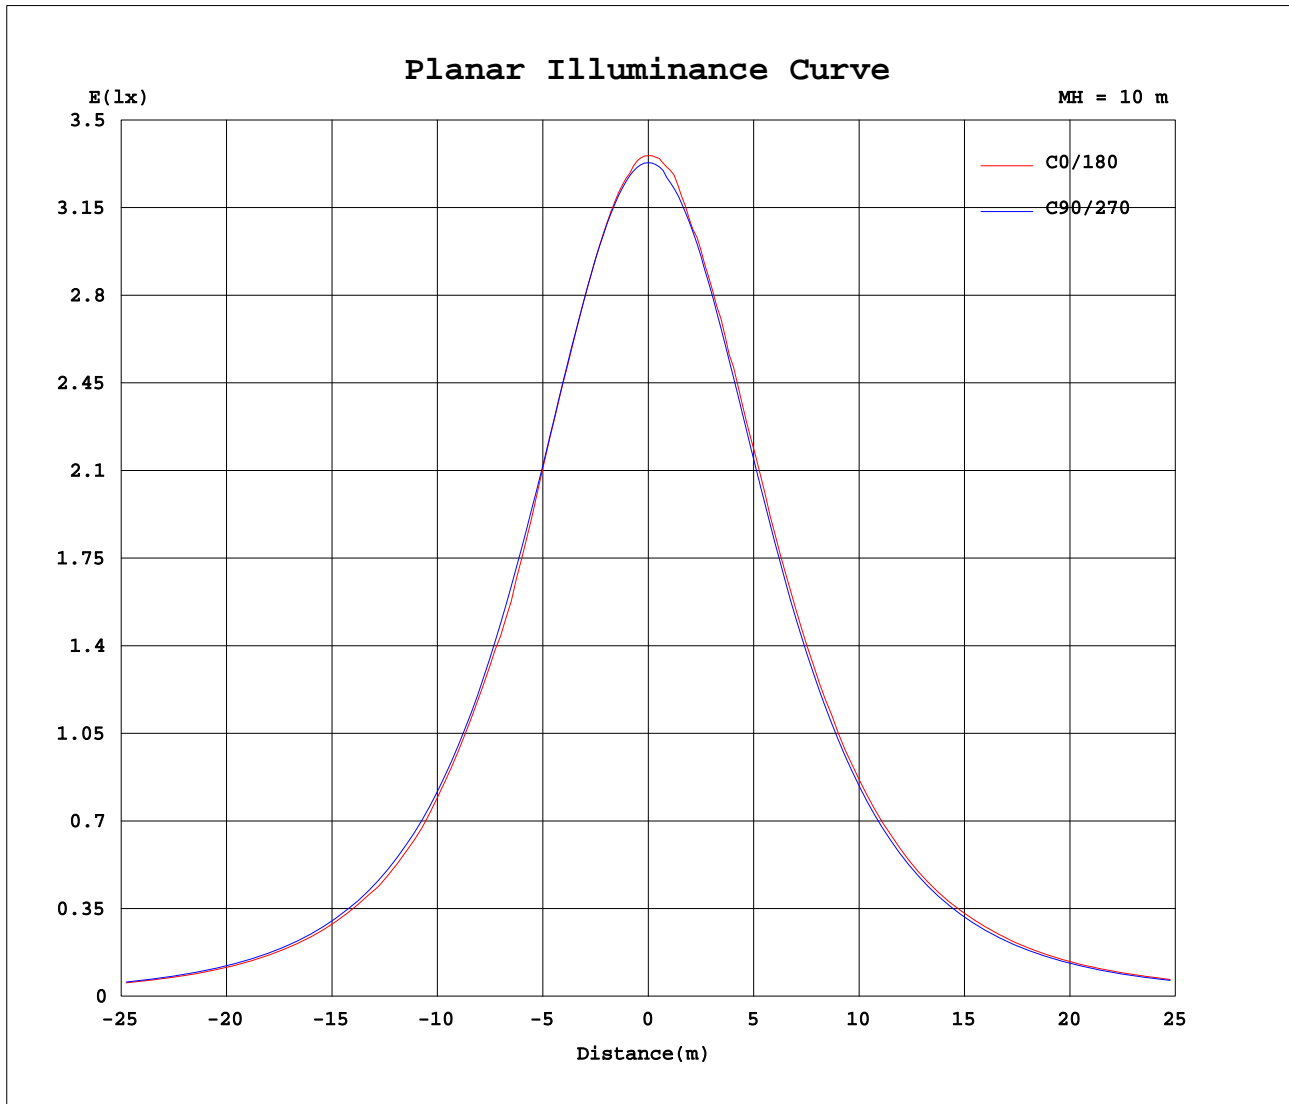

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Test Date: 2020-11-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 9.660m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.95V I:0.4304A P:10.31W PF:1.000 Lamp Flux:1020.83x1 lm		
NAME: UB-SNA-DW183090C (3000K)	TYPE:LED Strip	WEIGHT: 0.01 Kg
SPEC.: 11W	DIM.:1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10 (MM)	Shielding Angle:120

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	333	333	333	333	333	333	333	333	333	333	333	333	333	333	333	333			
5	330	330	331	331	332	333	333	332	332	333	333	332	331	333	331	331			
10	326	325	326	327	328	330	330	330	328	330	330	330	328	329	327	326			
15	318	318	319	320	321	323	324	325	322	325	325	324	322	322	320	319			
20	309	308	309	310	312	315	316	317	315	318	317	316	314	313	311	309			
25	297	296	297	299	301	304	306	307	305	308	307	306	304	302	299	297			
30	279	281	283	284	287	291	293	295	293	296	295	293	291	288	285	283			
35	260	264	266	268	271	275	278	279	279	281	280	278	275	273	269	267			
40	245	245	247	249	252	257	260	262	262	264	263	261	258	255	251	248			
45	223	224	225	228	231	237	240	243	243	245	244	242	238	234	230	227			
50	197	201	202	204	208	214	218	221	222	223	223	220	216	212	208	204			
55	174	175	176	179	184	189	193	197	198	200	199	196	192	187	183	180			
60	148	148	149	152	156	162	167	171	173	174	174	170	166	161	157	152			
65	119	119	120	123	127	133	138	142	145	146	146	143	139	133	128	124			
70	89.7	89.7	89.4	93.1	97.2	104	108	112	116	117	117	114	110	104	99.4	94.3			
75	60.1	59.6	59.4	62.9	67.0	73.8	77.7	81.3	83.4	85.6	86.5	83.8	79.6	74.2	69.2	64.4			
80	33.1	32.3	32.3	35.3	38.9	44.7	47.8	51.6	53.8	55.1	56.4	54.2	50.6	45.6	41.1	36.6			
85	11.6	11.1	12.0	14.2	16.9	20.7	23.2	25.7	27.6	28.9	29.4	28.4	25.5	21.9	18.2	14.6			
90	1.08	1.61	2.49	3.33	4.18	5.57	6.55	7.13	6.84	9.26	10.3	9.76	8.62	6.82	4.87	2.64			
95	0.42	0.70	0.90	0.79	0.88	0.99	1.22	0.72	0.36	1.09	1.87	2.38	2.15	1.95	1.15	0.47			
100	0.48	0.60	0.73	0.67	0.59	0.61	0.64	0.53	0.47	0.40	0.52	0.66	0.55	0.61	0.53	0.44			
105	0.65	0.72	0.69	0.69	0.59	0.65	0.61	0.64	0.59	0.46	0.55	0.53	0.59	0.58	0.64	0.51			
110	0.74	0.84	0.78	0.81	0.71	0.76	0.65	0.76	0.68	0.55	0.64	0.53	0.70	0.61	0.74	0.67			
115	0.84	0.95	0.81	0.91	0.77	0.88	0.74	0.88	0.83	0.75	0.76	0.70	0.79	0.72	0.86	0.79			
120	0.93	1.07	0.94	0.99	0.88	0.99	0.85	0.97	0.93	0.79	0.90	0.76	0.91	0.79	0.96	0.94			
125	1.04	1.16	1.02	1.11	0.94	1.08	0.94	1.09	1.04	0.92	0.99	0.88	0.99	0.96	1.06	0.97			
130	1.19	1.24	1.11	1.19	1.05	1.17	1.05	1.17	1.11	0.99	1.07	0.94	1.09	1.00	1.14	1.07			
135	1.22	1.31	1.23	1.28	1.18	1.26	1.15	1.24	1.22	1.05	1.16	1.03	1.15	1.08	1.23	1.17			
140	1.25	1.37	1.25	1.34	1.21	1.32	1.20	1.30	1.29	1.18	1.23	1.19	1.28	1.25	1.32	1.20			
145	1.32	1.45	1.29	1.40	1.26	1.38	1.26	1.39	1.34	1.24	1.33	1.22	1.32	1.28	1.37	1.26			
150	1.43	1.47	1.42	1.45	1.37	1.46	1.30	1.44	1.40	1.27	1.37	1.26	1.38	1.28	1.40	1.32			
155	1.46	1.51	1.48	1.49	1.43	1.54	1.43	1.51	1.46	1.34	1.45	1.35	1.47	1.38	1.47	1.44			
160	1.46	1.60	1.48	1.58	1.47	1.63	1.44	1.57	1.48	1.45	1.51	1.46	1.50	1.46	1.55	1.44			
165	1.52	1.65	1.54	1.66	1.58	1.66	1.53	1.65	1.58	1.47	1.55	1.46	1.58	1.48	1.59	1.47			
170	1.55	1.69	1.60	1.67	1.69	1.67	1.59	1.66	1.63	1.50	1.62	1.52	1.62	1.52	1.62	1.53			
175	1.64	1.66	1.65	1.66	1.70	1.66	1.62	1.66	1.66	1.59	1.65	1.60	1.67	1.58	1.65	1.57			
180	1.58	1.68	1.68	1.66	1.72	1.67	1.62	1.66	1.66	1.68	1.69	1.67	1.70	1.64	1.65	1.62			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2020-11-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks: